


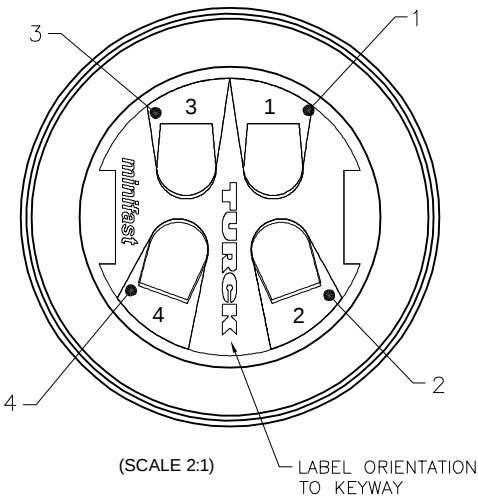


MALE END VIEW

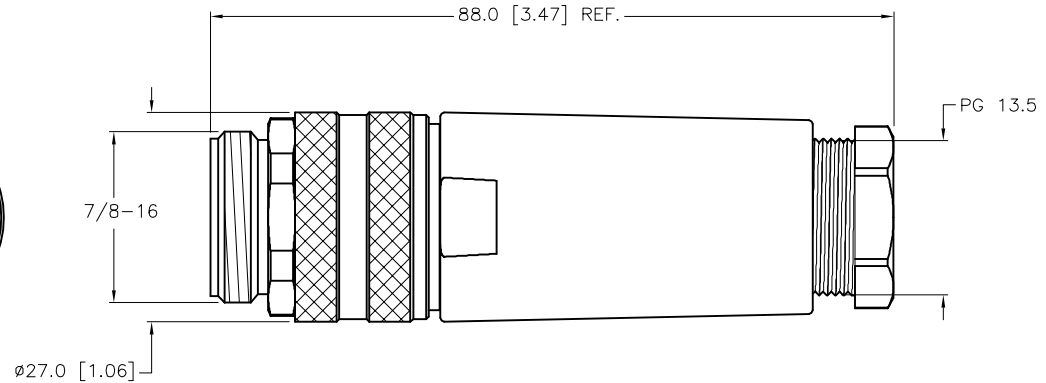

SPECIFICATIONS


HOUSING MATERIAL/COLOR	PBT or NYLON/BLACK
CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	DIECAST ZINC/NICKEL
RATED CURRENT [A]	9.0 A (16 AWG), 15.0 A (14 AWG)
RATED VOLTAGE [V]	600 V
MAXIMUM WIRE SIZE	14 AWG
TERMINATION METHOD	SCREW TERMINAL
CABLE GRIP RANGE	10–12mm
TEMPERATURE RATING	–25°C to +85°C (–13°F to +185°F)
PROTECTION CLASS	IP67

WIRE SIDE VIEW
OF CONTACT HOLDER
TO SHOW LABEL DETAILS

NOTES:

1. PINOUT REPRESENTS NUMBERING FOR DC WIRING.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION 	THIS DOCUMENT IS PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		TURCK INC High Technology Sensors and Automation Controls 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (612) 553-7300 (612) 553-0708 fax www.turck.com				
	MATERIAL	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	DRFT	ER	DATE	08/26/19	DESCRIPTION BS 4141-0/13.5 (DC PINOUT)	
	SEE SPECIFICATIONS		APVD	A.A.	SCALE	1=1.0		
FINISH	CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT			IDENTIFICATION NO.		REV
SEE SPECIFICATIONS			MILLIMETER [INCH]			100010032		B
		DO NOT SCALE THIS DRAWING			FILE: 100010032		SHEET 1 OF 1	

B	UPDATED CURRENT RATING AND MAXIMUM WIRE SIZE	ER	05/05/22	77602
REV	DESCRIPTION	BY	DATE	ECO. NO.