


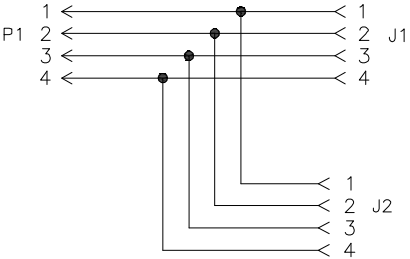


MALE END VIEW (P1)	FEMALE END VIEW (J1-J2)	WIRING DIAGRAM	SPECIFICATIONS	
			CONTACT CARRIER MATERIAL/COLOR	TPU/BLACK
			MOLDED BODY MATERIAL/COLOR	TPU/YELLOW
			CONTACT MATERIAL/PLATING	BRASS/GOLD
			COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
			RATED CURRENT [A]	10.0 A
			RATED VOLTAGE [V]	600 V
			TEMPERATURE RANGE	-40°C TO +105°C (-40°F TO +221°F)
			PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67

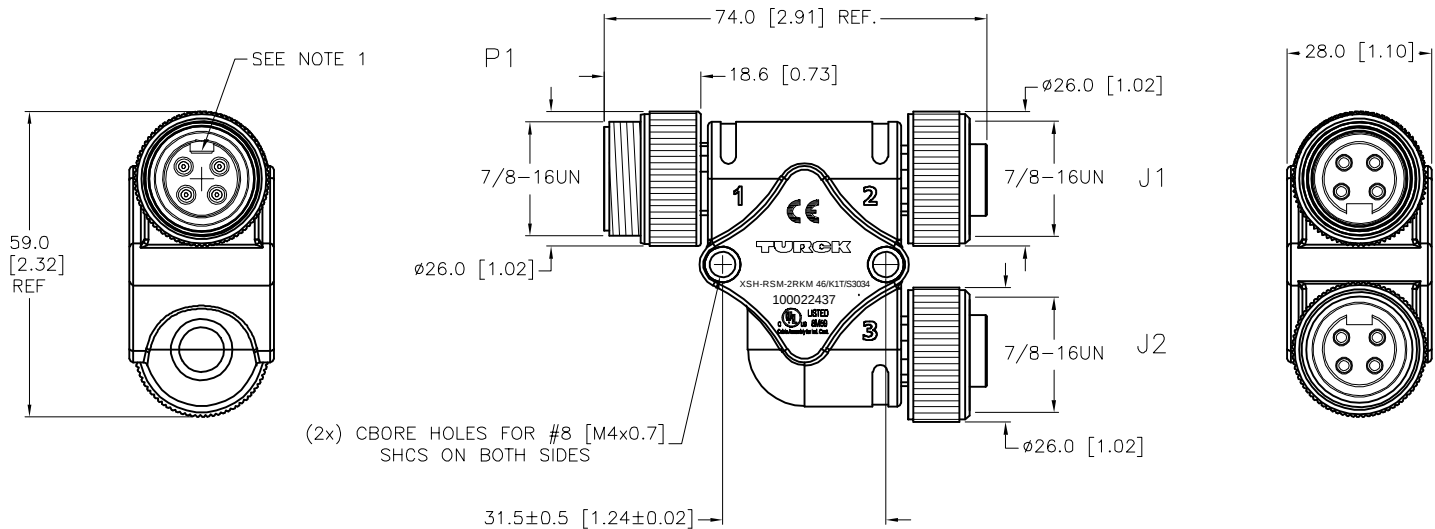


NOTES:

1. "/K1T" DESIGNATES KEYWAY OF CONNECTOR #1 (P1) ROTATED TO TOP OF ASSEMBLY. (180° FROM STANDARD).
2. "S3034" DESIGNATES YELLOW OVERMOLD

B	ADD UL AND CE MARKS TO LABEL	RDS	09/13/21	500000003510
REV	DESCRIPTION	BY	DATE	ECO. NO.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION 	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
	MATERIAL SEE SPECIFICATIONS	DRFT ER	DATE 08/06/20	DESCRIPTION XSH-RSM-2RKM 46/K1T/S3034	
FINISH SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	APVD E.S.	SCALE 1=1.5	IDENTIFICATION NO. 100022437	
CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT MILLIMETERS		REV B	
DO NOT SCALE THIS DRAWING		FILE: 100022437		SHEET 1 OF 1	