


WIRING DIAGRAM		LOCKNUT LN-P12		SPECIFICATIONS																			
RD/WH RD L1 YE/GN LOAD L2 OUTPUT: ADZ30X2 SHORT-CIRCUIT AND OVERLOAD PROTECTED		M12x1 .669 [17.0] .748 [19.0] .315 [8.0]		<table><tr><td>RATED OPERATING DISTANCE</td><td>4mm = .157"</td></tr><tr><td>MOUNTING MODE</td><td>NON-FLUSH</td></tr><tr><td>TEMPERATURE DRIFT</td><td>≤ ±10%</td></tr><tr><td></td><td>≤ ±15%, ≤ -25°C v ≥ +70°C</td></tr><tr><td>HYSTERESIS</td><td>3-15%</td></tr><tr><td>MIN. REPEAT ACCURACY</td><td>≤ 2%</td></tr><tr><td>OPERATING TEMPERATURE</td><td>-30°C to +85°C (-22°F to +185°F)</td></tr><tr><td>RATED OPERATIONAL VOLTAGE (AC/DC)</td><td>20-250 VAC/10-300 VDC</td></tr><tr><td>RATED OPERATIONAL CURRENT (AC/DC)</td><td>≤ 400 mA/≤ 300 mA</td></tr></table>		RATED OPERATING DISTANCE	4mm = .157"	MOUNTING MODE	NON-FLUSH	TEMPERATURE DRIFT	≤ ±10%		≤ ±15%, ≤ -25°C v ≥ +70°C	HYSTERESIS	3-15%	MIN. REPEAT ACCURACY	≤ 2%	OPERATING TEMPERATURE	-30°C to +85°C (-22°F to +185°F)	RATED OPERATIONAL VOLTAGE (AC/DC)	20-250 VAC/10-300 VDC	RATED OPERATIONAL CURRENT (AC/DC)	≤ 400 mA/≤ 300 mA
RATED OPERATING DISTANCE	4mm = .157"																						
MOUNTING MODE	NON-FLUSH																						
TEMPERATURE DRIFT	≤ ±10%																						
	≤ ±15%, ≤ -25°C v ≥ +70°C																						
HYSTERESIS	3-15%																						
MIN. REPEAT ACCURACY	≤ 2%																						
OPERATING TEMPERATURE	-30°C to +85°C (-22°F to +185°F)																						
RATED OPERATIONAL VOLTAGE (AC/DC)	20-250 VAC/10-300 VDC																						
RATED OPERATIONAL CURRENT (AC/DC)	≤ 400 mA/≤ 300 mA																						

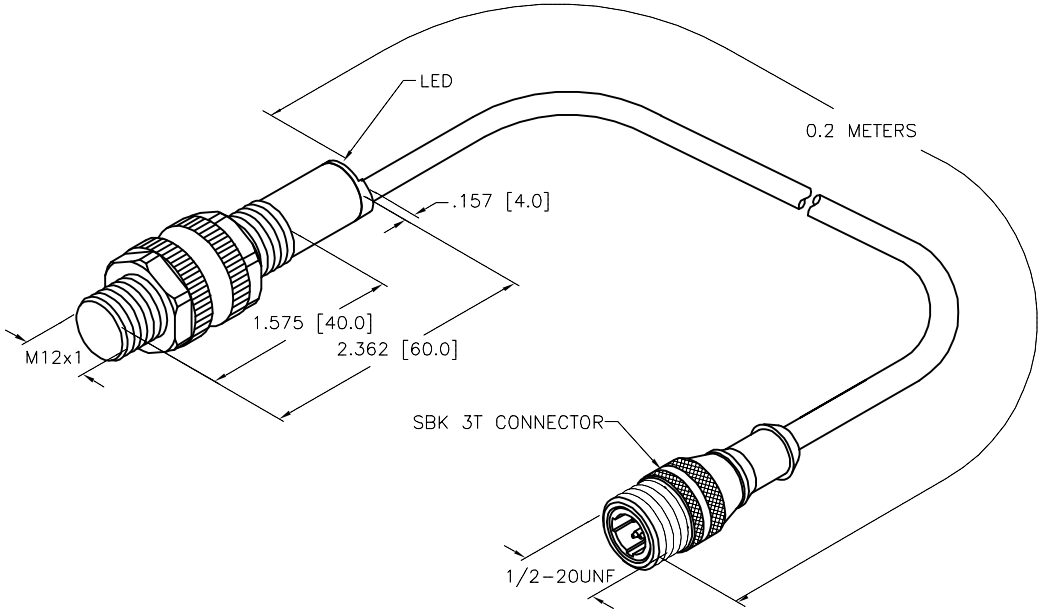


NOTES:

1. "/S1023" DESIGNATES WET/WASHDOWN APPLICATIONS. LENSED LEDS AND SERPENTINE FULLY POTTED INTERNAL CABLE.

C	UPDATE DESCRIPTION	RDS	08/28/20	76126
REV	DESCRIPTION	BY	DATE	ECO. NO.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS 1. 2. 3. 4.		3RD ANGLE PROJECTION 		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.				3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us			
MATERIAL SEE SPECIFICATION		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		DRFT RDS APVD J.M.		DATE 01/05/12 SCALE 1=1.3		DESCRIPTION NI4-S12-ADZ32X-0.2-SBK3T/S1023			
FINISH SEE SPECIFICATION		CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT INCH [MILLIMETER] DO NOT SCALE THIS DRAWING		IDENTIFICATION NO. 1302288					
						REV C					
FILE: 1302288						SHEET 1 OF 1					