


| WIRING DIAGRAM | | LOCKNUT LN-M18 | | SPECIFICATIONS | |
|--------------------------------------|--|----------------|--|--------------------------|--|
| <p>OUTPUT: ADZ30X2</p> | | | | RATED OPERATING DISTANCE | |
| | | | | 8mm [.315"] | |
| | | | | MOUNTING MODE | |
| | | | | FLUSH | |
| | | | | HYSTERESIS | |
| | | | | 3-15% | |
| | | | | MIN. REPEAT ACCURACY | |
| | | | | ≤ 2% | |
| | | | | TEMPERATURE DRIFT | |
| | | | | ≤ ± 10% | |
| OPERATING TEMPERATURE | | | | | |
| -25°C to +70°C (-13°F to +158°F) | | | | | |
| RATED OPERATIONAL VOLTAGE | | | | | |
| 20-250 VAC/10-300 VDC | | | | | |
| RATED OPERATIONAL CURRENT (AC/DC) | | | | | |
| ≤ 400 mA/≤ 300 mA | | | | | |
| SHORT-CIRCUIT AND OVERLOAD PROTECTED | | | | | |

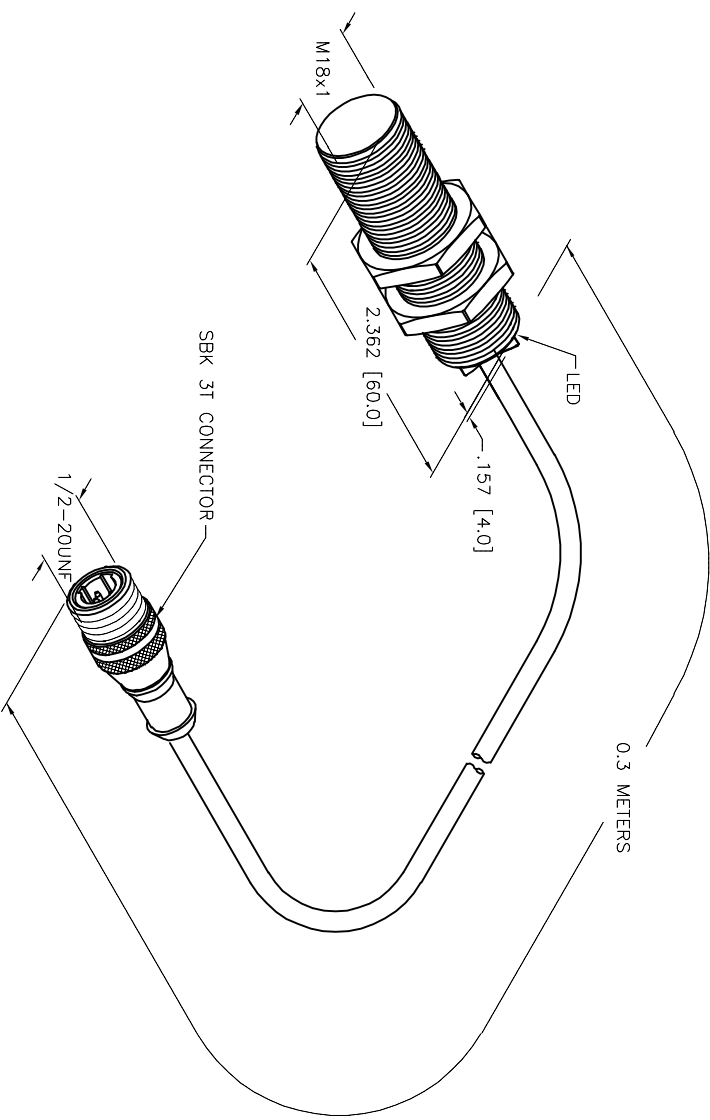

SOURCE DRAWING - FOR REFERENCE ONLY

| | | | | | | | | | | | | | | | | | |
|---|--|--|--|--|--|--|--|--|--|---|--|--|--|---|--|--|--|
| RELATED DOCUMENTS | | | | | | | | | | 3RD ANGLE PROJECTION | | THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED. | | <div>TURCK</div> <div>3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us</div> | | | |
| 1. 1. "S1023" DESIGNATES WET/WASHDOWN APPLICATIONS. LENSED LEDS AND SERPENTINE, FULLY POTTED, INTERNAL CABLE. | | | | | | | | | | | | | | | | | |
| NOTES: | | | | | | | | | | MATERIAL | | DRFT KMY DATE 03/20/12 | | DESCRIPTION BI8-G18-ADZ30X2-0.3-SBK3T/S1023 | | | |
| | | | | | | | | | | FINISH | | APVD J.M. SCALE 1=1.5 | | UNIT OF MEASUREMENT INCH [MILLIMETER] | | | |
| | | | | | | | | | | ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY | | | | IDENTIFICATION NO. 4209398 | | | |
| | | | | | | | | | | CONTACT TURCK FOR MORE INFORMATION | | DO NOT SCALE THIS DRAWING | | FILE: 4209398 | | | |
| C UPDATE LED SPECS | | | | | | | | | | NF 05/05/20 75841 | | | | SHEET 1 OF 1 | | | |
| REV DESCRIPTION | | | | | | | | | | BY DATE | | ECO NO. | | REV C | | | |

NOTES:

- 1. "S1023" DESIGNATES WET/WASHDOWN APPLICATIONS. LENSED LEDS AND SERPENTINE, FULLY POTTED, INTERNAL CABLE.