


NI35-CP40-FZ3X2-B3141



Inductive Sensor

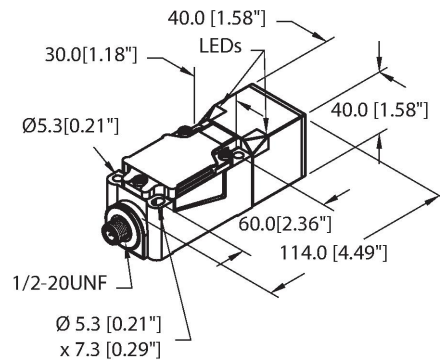

Features

- Rectangular, height 40 mm
- Variable orientation of active face in 9 directions
- Plastic, PBT-GF30-VO
- High-luminance corner LEDs
- Optimum view of operating voltage and switching state from any position
- AC 2-wire, 20...250 VAC
- DC 2-wire, 10...300 VDC
- NO contact
- 1/2" male connector

Wiring diagram




Technical data

Type	NI35-CP40-FZ3X2-B3141
ID	1341370
General data	
Rated switching distance	35 mm
Mounting conditions	Non-flush
Secured operating distance	$\leq (0.81 \times S_n)$ mm
Correction factors	St37 = 1; Al = 0.3; stainless steel = 0.7; Ms = 0.4
Repeat accuracy	≤ 2 % of full scale
Hysteresis	3...15 %
Electrical data	
Operating voltage U_b	20...250 VAC
Operating voltage U_b	10...300 VDC
AC rated operational current	≤ 400 mA
DC rated operating current I_o	≤ 300 mA
Frequency	$\geq 50 \dots \leq 60$ Hz
Residual current	≤ 1.7 mA
Isolation test voltage	1.5 kV
Surge current	≤ 8 A (≤ 10 ms max. 5 Hz)
Voltage drop at I_o	≤ 6 V
Output function	2-wire, Connection programmable, 2-wire
Smallest operating current	≥ 3 mA
Switching frequency	0.02 kHz

Functional principle

Inductive sensors detect metal objects contactless and wear-free. For this, they use a high-frequency electromagnetic AC field that interacts with the target. Inductive sensors generate this field via an RLC circuit with a ferrite coil.



Technical data

Mechanical data	
Design	Rectangular, CP40
Dimensions	114 x 40 x 40 mm
Housing material	Plastic, PBT-GF30-V0, Black
Active area material	Plastic, PBT-GF30-V0, yellow
Connector housing	metal
Electrical connection	Connector, 1/2"
Environmental conditions	
Ambient temperature	-25...+70 °C
Vibration resistance	55 Hz (1 mm)
Shock resistance	30 g (11 ms)
Protection class	IP67
MTTF	2283 years acc. to SN 29500 (Ed. 99) 40 °C
Power-on indication	2 × LEDs, Green
Switching state	2 × LEDs, Red

Mounting instructions

Mounting instructions/Description

The image contains two isometric diagrams illustrating the mounting of a sensor. The top diagram shows the sensor mounted on a wall. The sensor is represented by a yellow cube with a circular target symbol. The dimensions are labeled: D is the distance from the wall to the sensor, S is the distance from the sensor to the wall, N is the distance from the sensor to the wall, and W is the width of the sensor. The bottom diagram shows the sensor mounted on a panel. The dimensions are labeled: G is the distance from the panel to the sensor, and B is the width of the sensor.

Distance D	$4.5 \times B$
------------	----------------

Distance W	$3 \times S_n$
------------	----------------

Distance S	$1.5 \times B$
------------	----------------

Distance G	$6 \times S_n$
------------	----------------

Distance N	$1 \times B$
------------	--------------

Width active area B	40 mm
---------------------	-------


NI35-CP40-FZ3X2-B3141| 02/21/2025 13-56 | technical changes reserved

Accessories

JS025/037

69429

Adjusting bar for rectangular housings
CK/CP40; material: VA 1.4301



BSS-CP40

6901318

Mounting clamp for rectangular
housings 40 x 40 mm; material:
Polypropylene

