


RU200-CK40-2UN8X2T-H1151

Ultrasonic Sensor – Diffuse Mode Sensor





Technical data

| | |
|--------------------------------------|--------------------------|
| Type | RU200-CK40-2UN8X2T-H1151 |
| ID | 1610057 |
| Ultrasonic data | |
| Function | Proximity |
| Range | 50...2000 mm |
| Resolution | 1 mm |
| Minimum switching range | 20 mm |
| Ultrasound frequency | 120 kHz |
| Repeat accuracy | ≤ 0.25 % of full scale |
| Edge lengths of the nominal actuator | 100 mm |
| Approach speed | ≤ 3 m/s |
| Pass speed | ≤ 3 m/s |
| Electrical data | |
| Operating voltage U_B | 15...30 VDC |
| Residual ripple | 10 % U_{ss} |
| DC rated operating current I_o | ≤ 150 mA |
| No-load current | ≤ 50 mA |
| Load resistance | ≤ 1000 Ω |
| Residual current | ≤ 0.1 mA |
| Response time typical | < 160 ms |
| Readiness delay | ≤ 300 ms |
| Output function | NO/NC, NPN |
| Output 1 | Switching output |

Features

- Separate transducers for transmitter and receiver
- Rectangular housing 40 x 40 mm
- Connection via M12 x 1 male
- Teach range adjustable via button
- Blind zone: 5 cm
- Range: 200 cm
- Resolution: 1 mm
- Aperture angle of sonic cone: ±60 °
- 2 x switching outputs, NPN
- NO/NC programmable

Wiring diagram

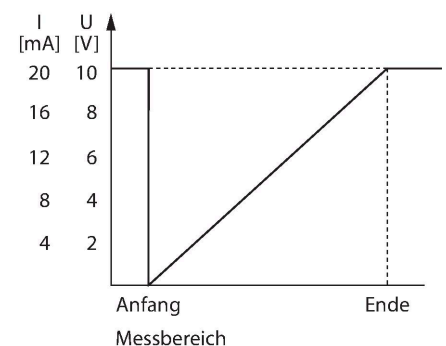

Technical data

| | |
|--------------------------------------|----------------------------------------------------------------------------|
| Output 2 | Switching output |
| Switching frequency | $\leq 3 \text{ Hz}$ |
| Hysteresis | $\leq 20 \text{ mm}$ |
| Voltage drop at I_a | $\leq 2.5 \text{ V}$ |
| Short-circuit protection | yes/Latching |
| Reverse polarity protection | yes |
| Wire breakage protection | yes |
| Setting option | Remote Teach |
| Mechanical data | |
| Design | Rectangular, CK40 |
| Radiation direction | straight |
| Dimensions | 67 x 40 x 40 mm |
| Housing material | Plastic, PBT-GF30-V0 |
| Electrical connection | Connector, M12 x 1, 5-wire |
| Ambient temperature | 0...+70 °C |
| Pressure resistance | 0.5...5 bar |
| Protection class | IP40 |
| Switching state | LED, Yellow |
| Object detected | LED, Green |
| Tests/approvals | |
| Declaration of conformity EN ISO/IEC | EN 60947-5-2 |
| Vibration resistance | 20 g, 10...55 Hz, sine, 3 axes, 30 min/ axis according to IEC 60068-2-6 |
| Shock test | 30 g, 11 ms, half sine, 3 axes according to IEC 60068-2-27 |
| Approvals | CE cULus |


Functional principle

Ultrasonic sensors capture a multitude of objects contactlessly and wear-free with ultrasonic waves. It does not matter whether the object is transparent or opaque, metallic or non-metallic, firm, liquid or powdery. Even environmental conditions such as spray, dust or rain hardly affect their function.


The sonic cone diagram indicates the detection range of the sensor. In accordance with standard EN 60947-5-2, quadratic targets in a range of sizes (20 x 20 mm, 100 x 100 mm) and a round rod with a diameter of 27 mm are used.

Important: The detection ranges for other targets may differ from those for standard targets due to the different reflection properties and geometries.

Sonic Cone

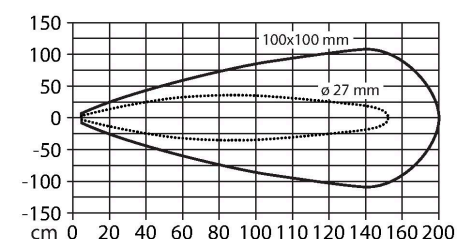


Output behaviour

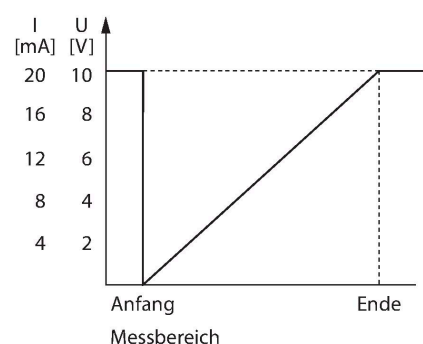

Mounting instructions

Mounting instructions/Description

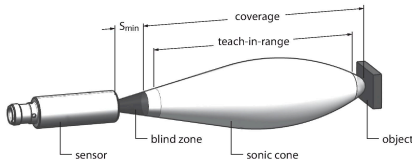

Setting the limits

The ultrasonic sensor features two switching outputs with teachable switching range. The range is either set via Easy-Teach or via the buttons on the housing. The green and yellow LED indicate whether the sensor has detected an object.

Various functions such as single switchpoint, window mode or reflection mode to a fixed target can be taught. Further information is described in the operating instructions. How to set the window mode is described below. The limits of the window may be selected freely within the detection range.

Easy-Teach

- Connect teach adapter TX1-Q20L60 between sensor and connection cable
- For the first limit value, place object accordingly
- Press and hold the select button for output 1 or 2 for 2 or 8 s against Gnd
- Press and hold the select button for 8 s against Gnd to teach the first limit value.
- For the second limit value, place object accordingly
- Press and hold button for at least 2 s against Gnd

Teach-Button

- For the first limit value, place object accordingly
- Press and hold button 1 to select output 1 or 2 for 2 or 8 s against Gnd
- Press and hold button 1 for at least 8 s
- For the second limit value, place object accordingly
- Press and hold button 1 for at least 2 s

After successful teaching, the sensor automatically runs in normal operating mode. Unsuccessful teach-in is signalled by the LED flashing slowly at a frequency of 5Hz.


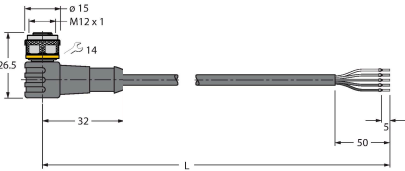
LED response

Successful teaching is indicated by a fast flashing green LED. Thereafter, the sensor automatically runs in normal operating mode. Unsuccessful teaching is indicated by the LED flashing alternately green and yellow.


In normal operating mode both LEDs signal the switching state of output 1.

- green: object is in the detection range but not in the switching range
- yellow: object is in the switching range
- off: object is outside the switching range

Wiring accessories

| Dimension drawing | Type | ID | |
|-----------------------------------------------------------------------------------|---------------|---------|-------------------------------------------------------------------------------------------------------------------------|
|  | RKC4.5T-2/TEL | 6625016 | Connection cable, M12 female connector, straight, 5-pin, cable length: 2 m, jacket material: PVC, black; cULus approval |
|  | WKC4.5T-2/TEL | 6625028 | Connection cable, M12 female connector, angled, 5-pin, cable length: 2 m, jacket material: PVC, black; cULus approval |

Accessories
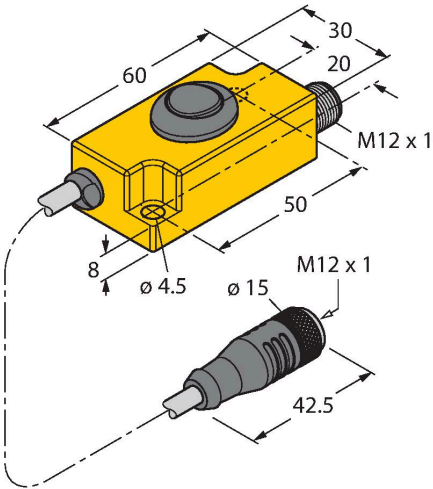
| Dimension drawing | Type | ID | |
|------------------------------------------------------------------------------------|------------|---------|-------------------------------------------------------------------------------------------------|
|  | TX1-Q20L60 | 6967114 | Teach adapter for inductive encoders, linear position, angle, ultrasonic and capacitive sensors |