


BI1-EH03-AN6X Inductive Sensor




Technical data

Type	BI1-EH03-AN6X
ID	1619326
General data	
Rated switching distance	1 mm
Mounting conditions	Flush
Secured operating distance	$\leq (0.81 \times S_n)$ mm
Correction factors	St37 = 1; Al = 0.5; Cu=0.45; stainless steel = 0.8; Ms = 0.6
Repeat accuracy	$\leq 2 \%$ of full scale
Hysteresis	3...15 %
Electrical data	
Operating voltage U_B	10...30 VDC
Ripple U_{ss}	$\leq 20 \%$ U_{Bmax}
DC rated operating current I_o	≤ 100 mA
No-load current	≤ 10 mA
Residual current	≤ 0.1 mA
Isolation test voltage	0.5 kV
Short-circuit protection	yes/Cyclic
Voltage drop at I_o	≤ 2 V
Wire break/reverse polarity protection	yes/Complete
Output function	3-wire, NO contact, NPN
Switching frequency	3 kHz
Mechanical data	
Design	Smooth barrel, 3 mm

Features

- Smooth barrel, Ø 3 mm
- Stainless steel, 1.4301
- DC 3-wire, 10...30 VDC
- NO contact, NPN output
- Cable connection

Wiring diagram




Functional principle

Inductive sensors detect metal objects contactless and wear-free. For this, they use a high-frequency electromagnetic AC field that interacts with the target. Inductive sensors generate this field via an RLC circuit with a ferrite coil.

Technical data

Dimensions	22 mm
Housing material	Stainless steel, 1.4301 (AISI 304)
Active area material	Plastic, Polyester
Electrical connection	Cable
Cable quality	Ø 2.6 mm, LifY-11Y, PUR, 2 m
Core cross-section	3 x 0.055 mm ²
Environmental conditions	
Ambient temperature	-25...+70 °C
Vibration resistance	55 Hz (1 mm)
Shock resistance	30 g (11 ms)
Protection class	IP67
MTTF	2283 years acc. to SN 29500 (Ed. 99) 40 °C
Switching state	LED, Yellow, Flashes within the limits (>0.8 Sn)

Mounting instructions

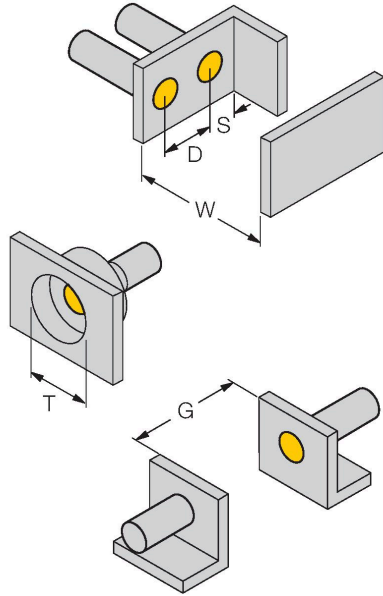Mounting instructions/Description		
	Distance D	2 x B
	Distance W	3 x Sn
	Distance T	3 x B
	Distance S	1.5 x B
	Distance G	9 x Sn
	Diameter active area B	Ø 3 mm

BI1-EH03-AN6X | 02/21/2025 14-24 | technical changes reserved

Accessories

MBS30

6948000

Fixing clamp; material mounting
block: plastic

