


SPECIFICATIONS				
NYLON OR TPU				
TPU/YELLOW				
BRASS/GOLD				
BRASS/NICKEL				
4.0 A				
125 VAC/VDC				
PVC/YELLOW				
PVC				
3x24 AWG				
-40°C to +105°C (-40°F to +221°F)				
MEETS NEMA 1,3,4,6P AND IEC IP67				

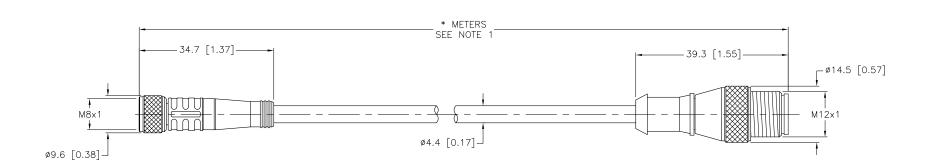

CABLE LENGTH	TOLERANCE
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm

NOTES:

DESCRIPTION

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO OF SPECIFIC LENGTHS.

DRAWING PROCESSED AS PART OF ECO 33971

RDER		

33971

ECO NO.

СВМ

BY

04/06/1

DATE

MATERIAL ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR SEE SPECIFICATIONS REFERENCE ONLY FINISH CONTACT TURCK FOR MORE

3RD ANGLE PROJECTION

INFORMATION

RELATED DOCUMENTS

SEE SPECIFICATIONS

2.

3.

THIS DOCUMENT IS PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED. DATE 08/03/99 JBJ

DSGN

turck inc High Technology Sensors and Automation Controls

DESCRIPTION

FILE: 777000277

3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (612) 553-7300 (612) 553-0708 fax

REV

SHEET 1 OF 1

www.turck.com PKG 3M-*-RS 4T

SOURCE DRAWING - FOR REFERENCE ONLY

UNIT OF MEASUREMENT IDENTIFICATION NO. MILLIMETER [INCH]

1 = 1.0

SCALE

DO NOT SCALE THIS DRAWING