



## FEMALE END VIEW





1 = GROUND  
2 = LOAD (L2)  
3 = COMMON (L1)

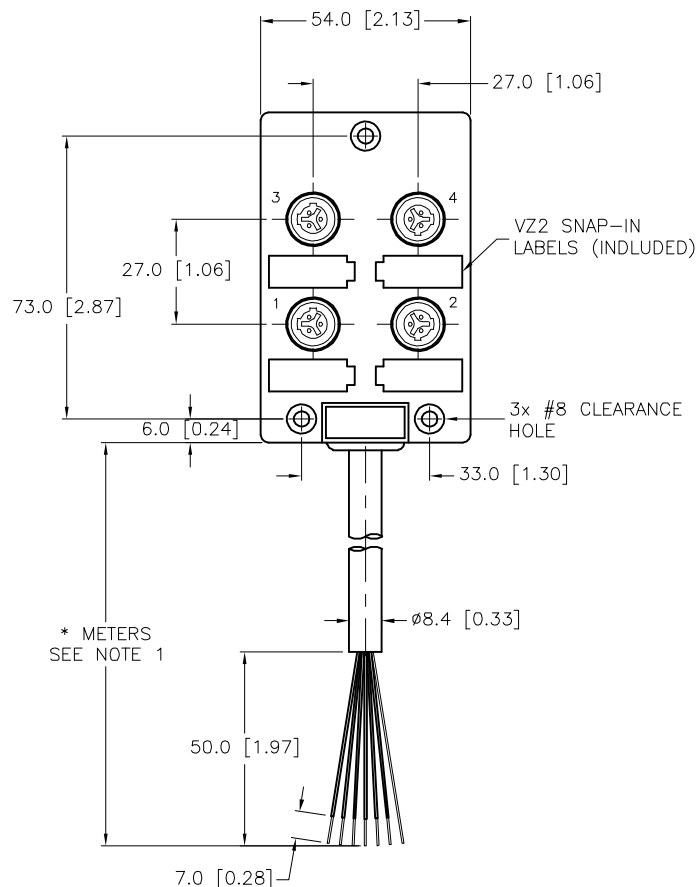

\* METERS  
SEE NOTE 1

## NOTES:

1. "\*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

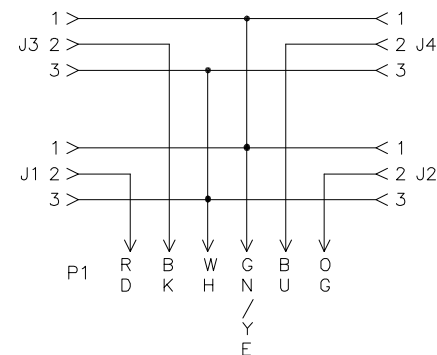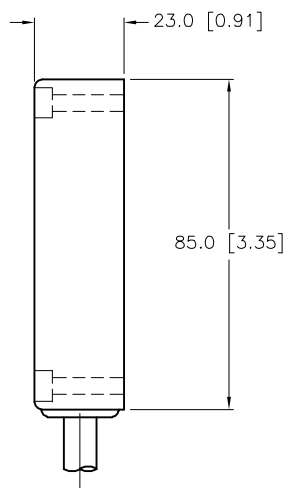


WIRING DIAGRAM

CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm

\* UNLESS OTHERWISE SPECIFIED




## SPECIFICATIONS

HOUSING MATERIAL/COLOR	NYLON/YELLOW
CONTACT MATERIAL/PLATING	BRASS/GOLD
CONTACT CARRIES/COLOR	NYLON/BLACK
RATED CURRENT [A]	4.0 A PER PORT, 9.0 A TOTAL
RATED VOLTAGE [V]	250 VAC/300 VDC
OUTER JACKET MATERIAL/COLOR	PVC/BLACK
CONDUCTOR INSULATION MATERIAL	PVC
NUMBER OF CONDUCTORS [AWG]	6x18 AWG
DRAIN/SHIELD	20 AWG/ALUMINUM-POLYESTER FOIL
TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)
PROTECTION CLASS	NEMA 1,3,4,6P AND IEC IP67



CLOSURE CAPS  
(2x INCLUDED)

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS  1.  2.  3.  4.	3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.				3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us		
MATERIAL  SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		DRFT	RWC	DATE	03/26/07	DESCRIPTION  VBKB 40-*		
FINISH  SEE SPECIFICATIONS			APVD		SCALE	1=2.0			
			CONTACT TURCK FOR MORE INFORMATION	UNIT OF MEASUREMENT  MILLIMETER [ INCH ]			IDENTIFICATION NO.  REV D		
			DO NOT SCALE THIS DRAWING			FILE: 777000345			
						SHEET 1 OF 1			

D	UPDATED GRN CONDUCTOR TO GRN/YEL PER ECO	TV	11/07/17	61235
REV	DESCRIPTION	BY	DATE	ECO NO.