

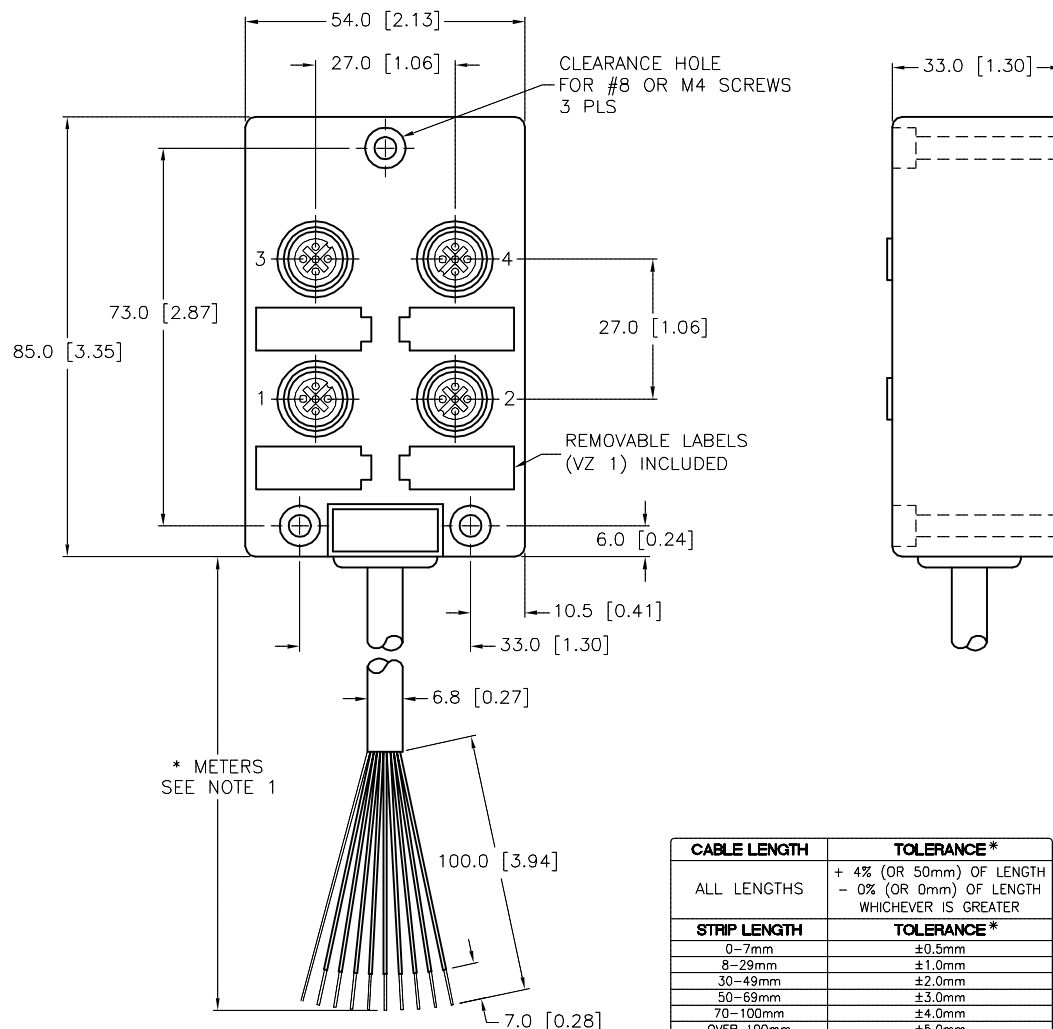




CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm

* UNLESS OTHERWISE SPECIFIED

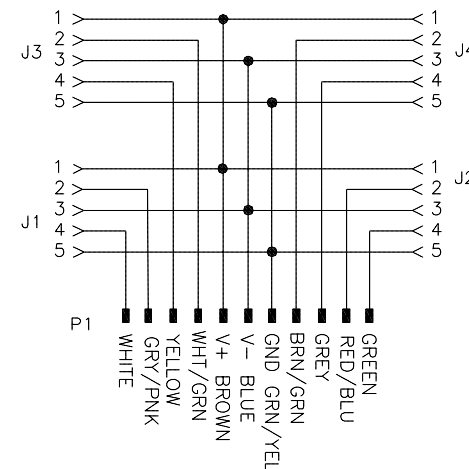

CLOSURE CAPS (2 INCLUDED)

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:

- "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
- "/S90" DESIGNATES POLYURETHANE (TPU) CABLE JACKET.

RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	TURCK 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us		
1.							
2.							
3.							
4.							
MATERIAL		DRFT RDS		DATE 05/30/08	DESCRIPTION VB 40.5-*/S90		
SEE SPECIFICATIONS		APVD		SCALE 1=1.5			
FINISH		UNIT OF MEASUREMENT MILLIMETER [INCH]			IDENTIFICATION NO.		REV E
SEE SPECIFICATIONS							
		DO NOT SCALE THIS DRAWING			FILE: 777000351		SHEET 1 OF 1

E	UPDATED SEALING MATERIAL PER ECO	TV	08/09/16	56141
REV	DESCRIPTION	BY	DATE	ECO NO.