

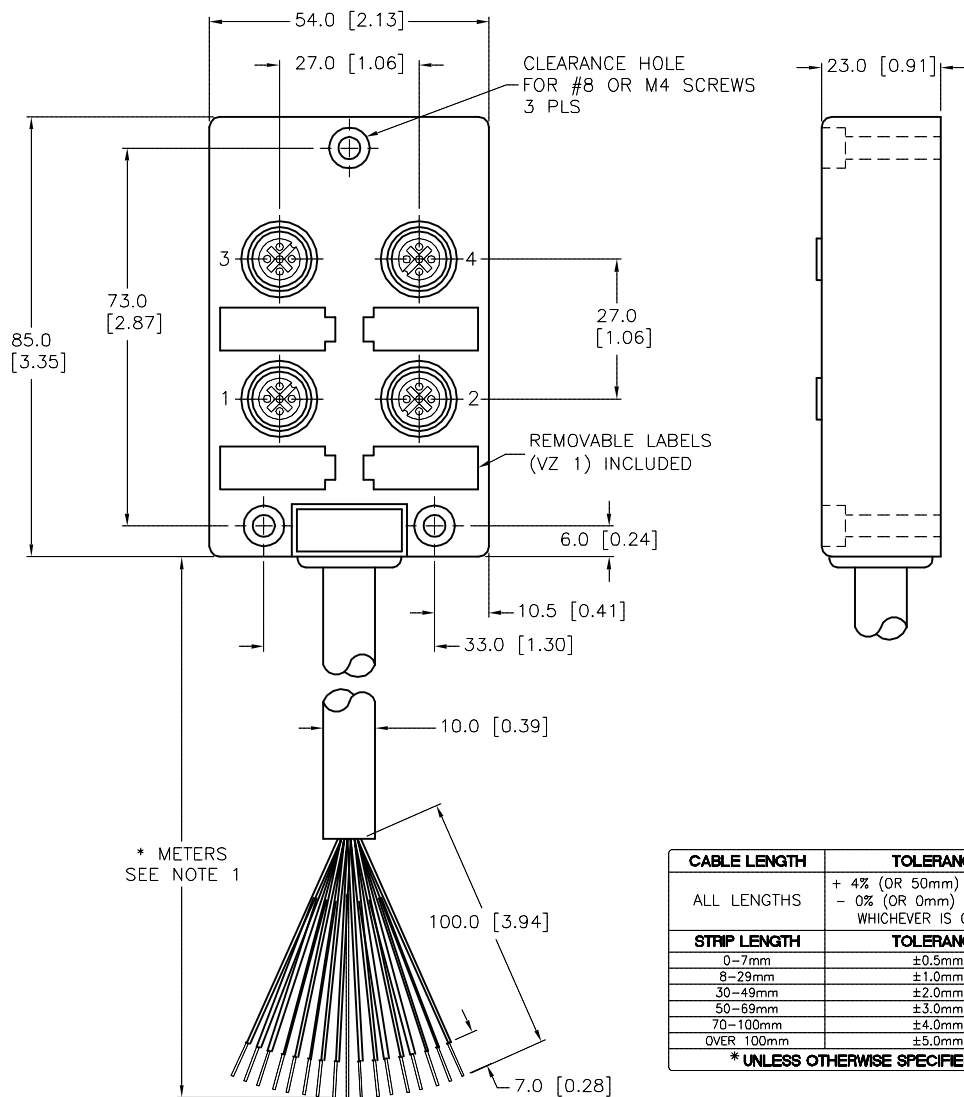




CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm

* UNLESS OTHERWISE SPECIFIED

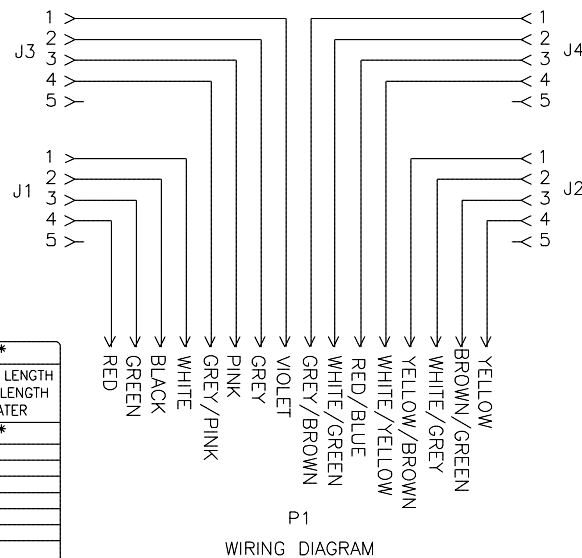

CLOSURE CAPS
(2 INCLUDED)

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:

- "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
- "/S1552" DESIGNATES THERMOPLASTIC POLYURETHANE (TPU) CABLE WITH 19 CONDUCTORS, SPECIAL WIRING.

RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		TURCK		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
1.				DRFT		DATE		DESCRIPTION VB 4X1.5N-*/S1552	
2.				IK		08/11/99			
3.				APVD		SCALE		IDENTIFICATION NO.	
4.						1=1.5			
MATERIAL		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		UNIT OF MEASUREMENT		DO NOT SCALE THIS DRAWING		REV J	
SEE SPECIFICATIONS				MILLIMETER [INCH]					
FINISH		CONTACT TURCK FOR MORE INFORMATION				FILE: 777000361		SHEET 1 OF 1	
SEE SPECIFICATIONS									

J	UPDATED SEALING MATERIAL PER ECO	TV	08/09/16	56141
REV	DESCRIPTION	BY	DATE	ECO NO.