



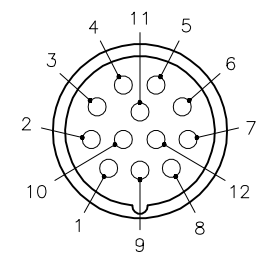




MALE END VIEW		FEMALE END VIEW		SPECIFICATIONS	
 <div>1 = VIOLET 2 = BLUE 3 = GREY 4 = BLACK 5 = WHITE 6 = RED 7 = GREEN/YELLOW 8 = YELLOW 9 = ORANGE 10 = BROWN 11 = N/C 12 = N/C</div>		 <div>1 = VIOLET 2 = BLUE 3 = GREY 4 = BLACK 5 = WHITE 6 = RED 7 = GREEN/YELLOW 8 = YELLOW 9 = ORANGE 10 = BROWN 11 = N/C 12 = N/C</div>		CONTACT CARRIER MATERIAL	NYLON or PBT
 M23 connector		 M23 connector		MOLDED HEAD MATERIAL/COLOR	TPU/BLACK
				CONTACT MATERIAL/PLATING	BRASS/GOLD
				COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
				RATED CURRENT [A]	6.0 A
				RATED VOLTAGE [V]	300 V
				OUTER JACKET MATERIAL/COLOR	PVC/BLACK
				CONDUCTOR INSULATION MATERIAL	PVC
				NUMBER OF CONDUCTORS [AWG]	10x18 AWG
				DRAIN/SHIELD	20 AWG/ALUM.-POLYESTER FOIL
				TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)
				PROTECTION CLASS	IEC IP67

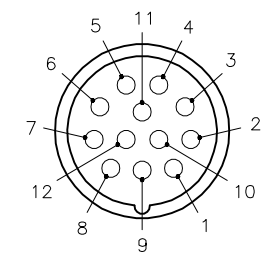

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

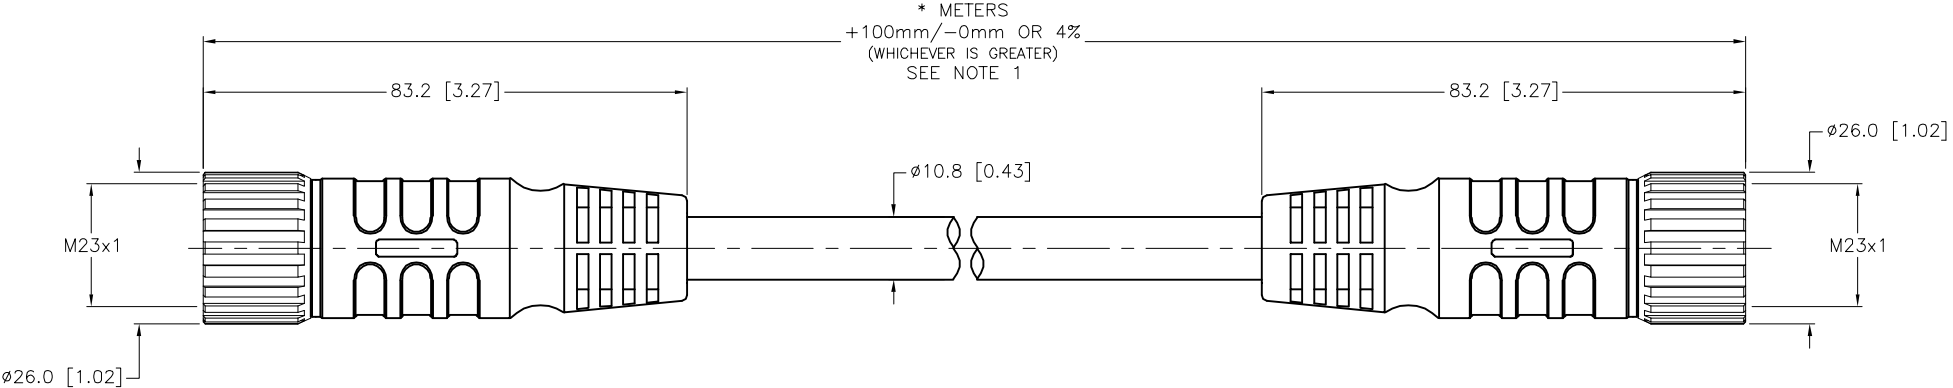D	UPDATED CONDUCTOR COLORS PER ECO	TV	07/10/17	60605
REV	DESCRIPTION	BY	DATE	ECO NO.

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION 	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		 <div>3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us</div>	
MATERIAL SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	DRFT	RDS	DATE 12/22/09	DESCRIPTION CSRM CKRM 12-10-*
		APVD		SCALE NONE	
FINISH SEE SPECIFICATIONS	CONTACT TURCK FOR MORE INFORMATION	UNIT OF MEASUREMENT MILLIMETER [INCH]			IDENTIFICATION NO.