


A = N/C
 C = GRAY
 E = GREEN
 G = BLACK
 J = N/C
 L = N/C
 M = BROWN
 N = PINK
 O = YELLOW
 P = WHITE
 R = RED
 S = VIOLET
 T = N/C
 U = BLUE

CONTACT CARRIER MATERIAL	NYLON
CONTACT MATERIAL/PLATING	COPPER ALLOY/GOLD
HOUSING MATERIAL/PLATING	BRASS/NICKEL
RATED CURRENT [A]	3.0 A
RATED VOLTAGE [V]	60 V AC/DC
NUMBER OF CONDUCTORS [AWG]	10x24 AWG
TEMPERATURE RANGE	-30° C to +80° C (-25° F to +176° F)
PROTECTION CLASS	MEETS IEC IP67

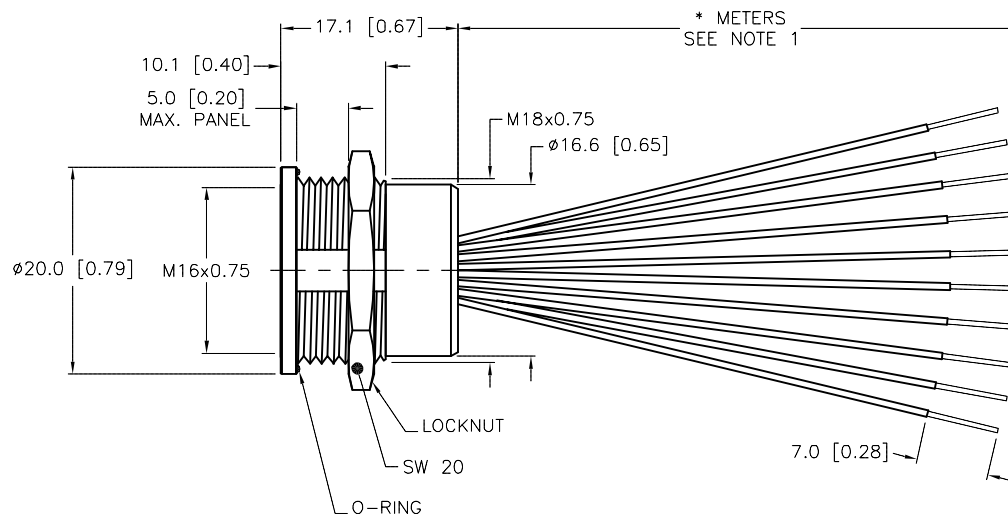


CABLE LENGTH	TOLERANCE *
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE *
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

1. "*" INDICATES LEAD LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

B	UPDATE GRAPHICS FOR LOCKNUT, SEE ECO	RWC	12/20/10	33605
REV	DESCRIPTION	BY	DATE	ECO NO.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED. TURCK INC High Technology Sensors and Automation Controls 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com				
						
	MATERIAL			DRFT JBJ	DATE 10/09/01	DESCRIPTION RBKFL 1614-836-*
	SEE SPECIFICATIONS			Dsgn	SCALE 1=.7	
FINISH	UNIT OF MEASUREMENT MILLIMETER [INCH]		IDENTIFICATION NO.	REV B		
SEE SPECIFICATIONS	CONTACT TURCK FOR MORE INFORMATION	DO NOT SCALE THIS DRAWING		FILE: 777000448	SHEET 1 OF 1	