



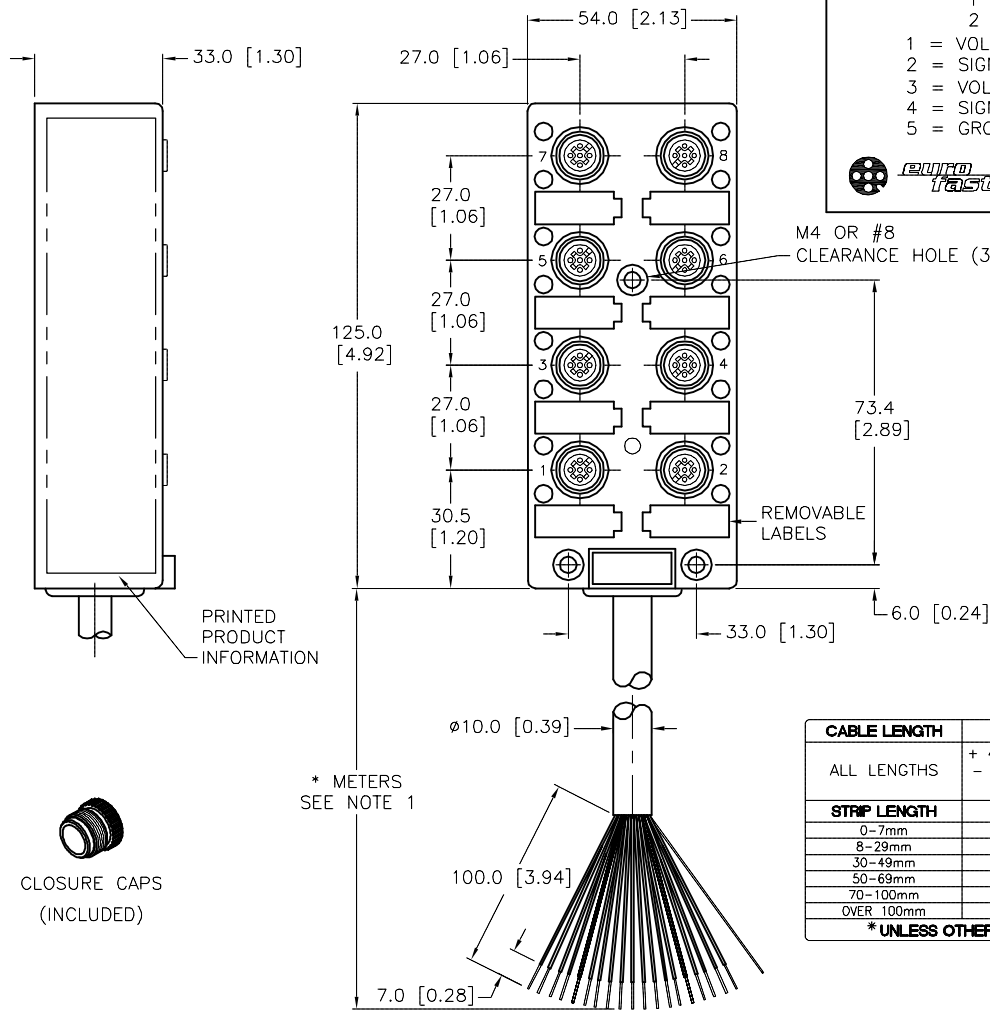

CONNECTORS J1-J8



M4 OR #8
CLEARANCE HOLE (3)

REMOVABLE
LABELS

CABLE LENGTH	TOLERANCE *
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE *
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

SPECIFICATIONS

CABLE DATA

JACKET MATERIAL/COLOR	TPU/YELLOW
NUMBER OF CONDUCTORS [AWG]	3X18 AWG, 16X22 AWG
DRAIN/SHIELD	20 AWG/POLYESTER FOIL SHIELD

MATERIAL


HOUSING	NYLON/YELLOW
CONTACT CARRIERS	NYLON OR TPU
CONTACTS/PLATING	BRASS/GOLD
SEALING O-RING	FKM/FPM
DISCONNECT/PLATING	BRASS/NICKEL

ELECTRICAL DATA

OPERATING VOLTAGE	10-30 VDC
MAXIMUM CURRENT	3 AMPS PER PORT, 8 AMPS TOTAL

MECHANICAL DATA

PROTECTION CLASS	IP 67	ONLY WHEN ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED
OPERATING TEMPERATURE	-40°C to +90°C (-40°F to +194°F)	

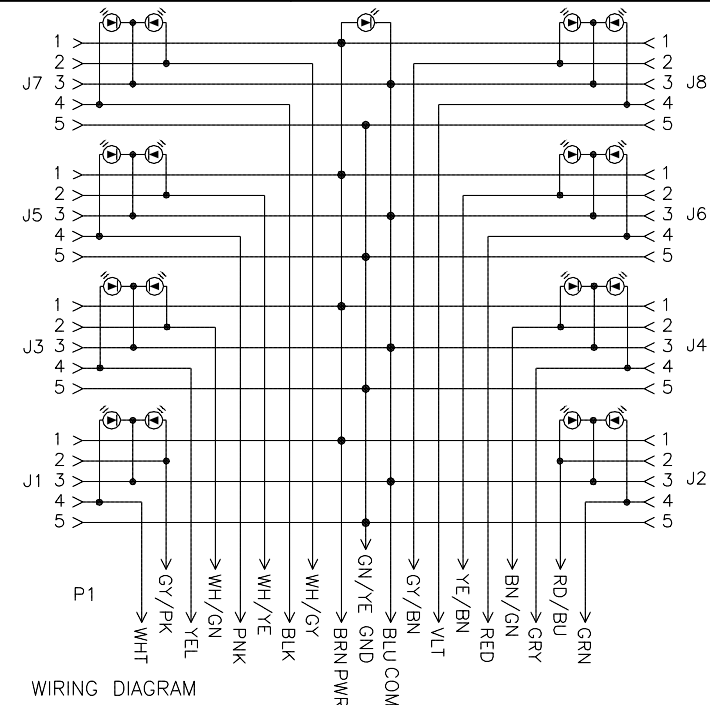

WIRING DIAGRAM

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:

- "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
- "/S90" DESIGNATES TPU (POLYURETHANE) CABLE JACKET.

RELATED DOCUMENTS

- 1.
- 2.
- 3.
- 4.


MATERIAL

SEE SPECIFICATIONS

FINISH

SEE SPECIFICATIONS

3RD ANGLE PROJECTION



ALL DIMENSIONS
DISPLAYED ON THIS
DRAWING ARE FOR
REFERENCE ONLY

CONTACT TURCK
FOR MORE
INFORMATION

THIS DRAWING IS
CONFIDENTIAL AND THE
PROPERTY OF TURCK
INC. USE OF THIS
DOCUMENT WITHOUT
WRITTEN PERMISSION IS
PROHIBITED.

DRFT RWC
APVD

DATE 07/21/08
SCALE 1=2

UNIT OF MEASUREMENT
MILLIMETER [INCH]

DO NOT SCALE THIS DRAWING

TURCK

3000 CAMPUS DRIVE
MINNEAPOLIS, MN 55441
1-800-544-7769
(763) 553-7300
(763) 553-0708 fax
www.turck.us

DESCRIPTION

VB 80.5-P7X17-*/S90

IDENTIFICATION NO.

REV

F

FILE: 777000463

SHEET 1 OF 1

F	UPDATED SEALING RING MATERIAL PER ECO	TV	08/10/16	56141
REV	DESCRIPTION	BY	DATE	ECO NO.