

FEMALE END VIEW

A = N/C

C = ORANGE

E = BLACK

G = GREEN

J = GREY

L = N/C

M = BROWN

N = TAN

O = VIOLET

P = RED

R = WHITE

S = YELLOW


T = PINK

U = BLUE

M16 connector

SPECIFICATIONS

CONTACT CARRIER MATERIAL	PBT
CONTACT MATERIAL/PLATING	BRASS/GOLD
HOUSING MATERIAL/PLATING	ZINC DIECAST/NICKEL
COUPLING NUT MATERIAL/PLATING	ZINC DIECAST/NICKEL
RATED CURRENT [A]	3.0 A
RATED VOLTAGE [V]	60 VAC/VDC
OUTER JACKET MATERIAL/COLOR	PVC/BLACK
CONDUCTOR INSULATION MATERIAL	PVC
NUMBER OF CONDUCTORS [AWG]	12/24 AWG
DRAIN/SHIELD	26 AWG/ALUM.-POLYESTER FOIL
TEMPERATURE RANGE	-30°C TO +95°C (-22°F TO +203°F)
PROTECTION CLASS	MEETS IEC IP67

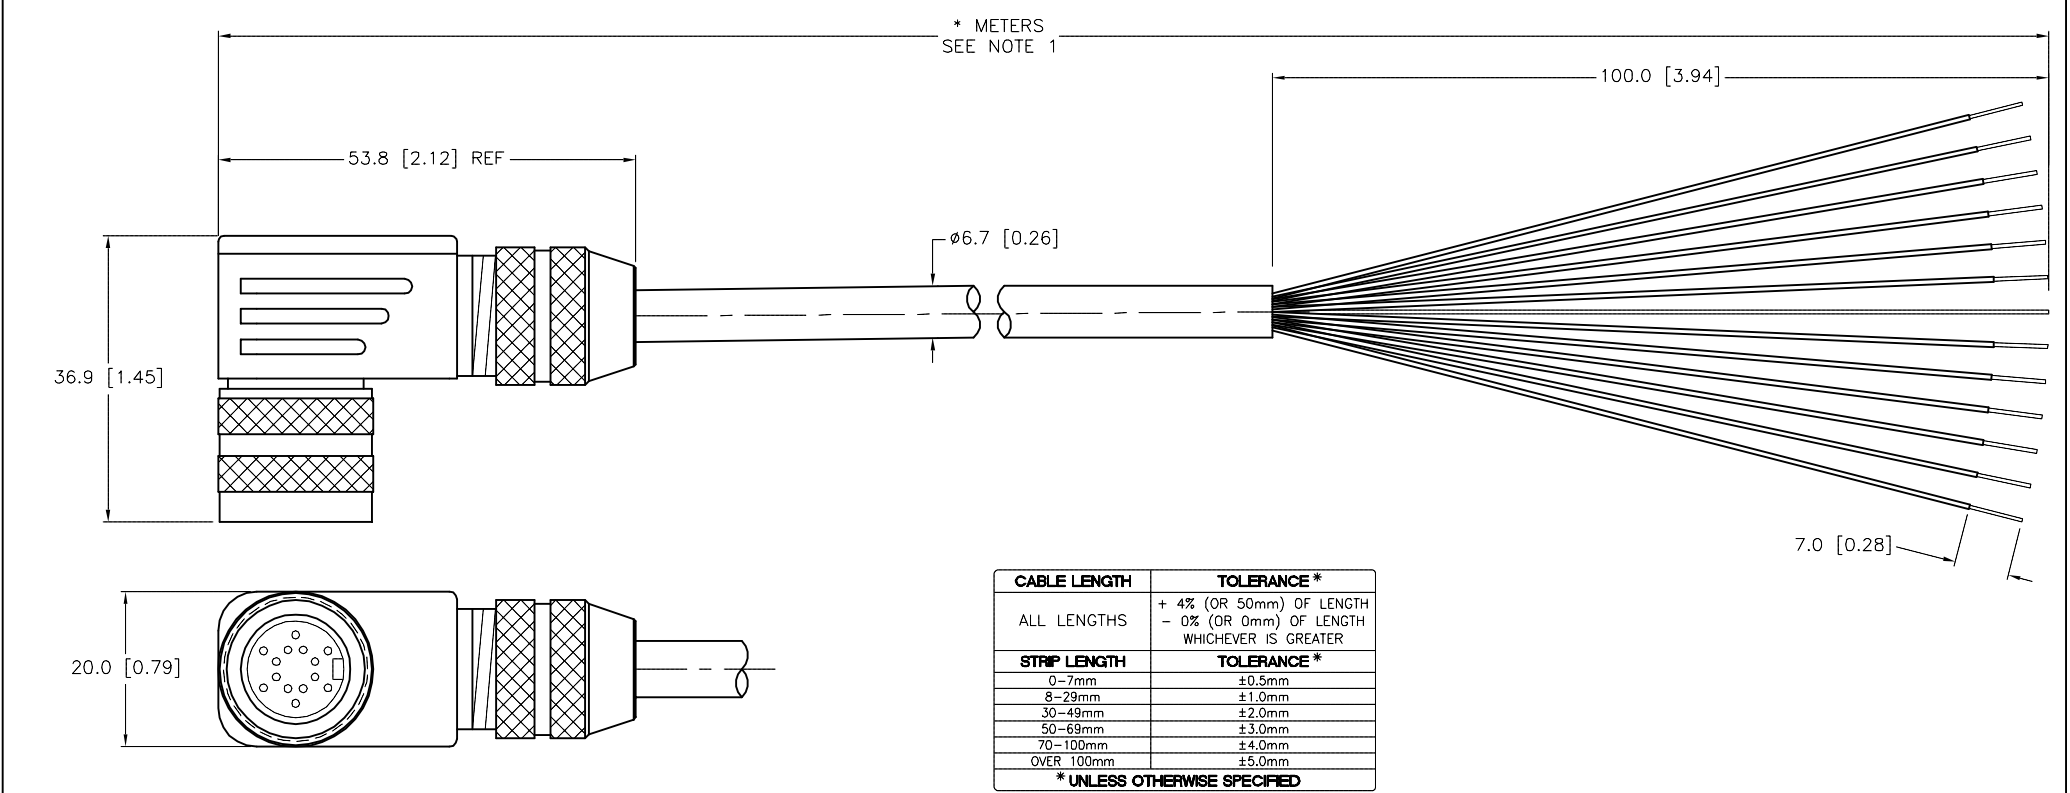

NOTES:

1. "*" DESIGNATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS

1.
2.
3.
4.

3RD ANGLE PROJECTION

THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.

3000 CAMPUS DRIVE
MINNEAPOLIS, MN 55441
1-800-544-7769
(763) 553-7300
(763) 553-0708 fax
www.turck.us

MATERIAL

SEE SPECIFICATIONS

FINISH

SEE SPECIFICATIONS

ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY

CONTACT TURCK FOR MORE INFORMATION

DRFT CBM

APVD

DATE 03/17/00

SCALE 1=1.0

UNIT OF MEASUREMENT

MILLIMETER [INCH]

DO NOT SCALE THIS DRAWING

DESCRIPTION

WBKS 1614-755-*

IDENTIFICATION NO.

REV

C

FILE: 777000478

SHEET 1 OF 1

C	UPDATE END VIEW PER ECO	TR	12/23/14	48369
REV	DESCRIPTION	BY	DATE	ECO NO.