




FEMALE END VIEW	MALE END VIEW	SPECIFICATIONS	
		CONTACT CARRIER MATERIAL	TPU OR NYLON
1 = BROWN 2 = DRAIN 3 = BLUE 4 = BLACK	1 = BROWN 2 = DRAIN 3 = BLUE 4 = BLACK	MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW
		CONTACT MATERIAL/PLATING	BRASS/GOLD
		COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
		RATED CURRENT [A]	4.0 A
		RATED VOLTAGE [V]	250 VAC
		OUTER CABLE JACKET MATERIAL/COLOR	PVC/GRAY
		CONDUCTOR INSULATION MATERIAL	PVC
		NUMBER OF CONDUCTORS [AWG]	3x22 AWG
		DRAIN/SHIELD	24 AWG/ALUM.-POLYESTER FOIL
		TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)
		PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP68

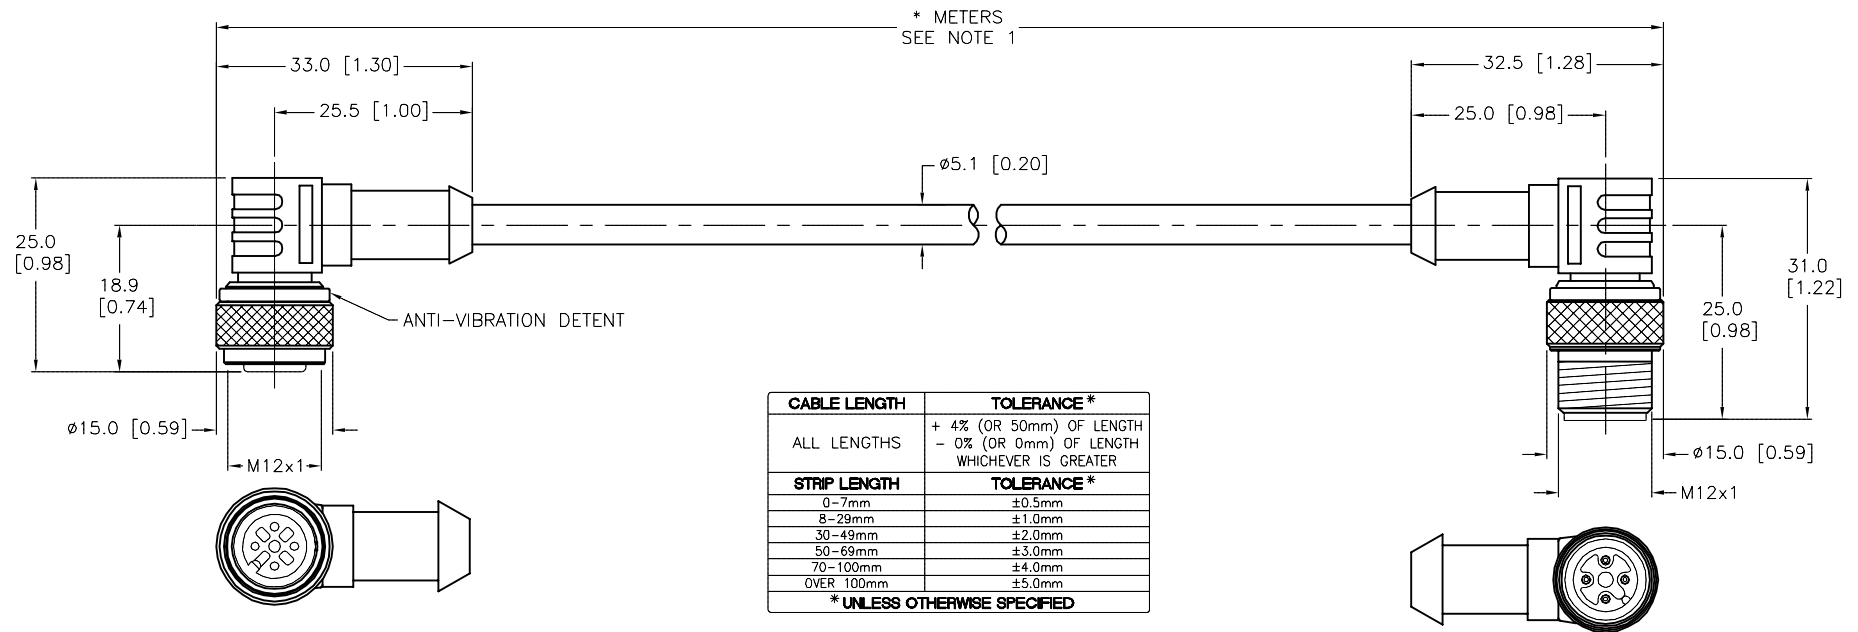


CABLE LENGTH	TOLERANCE *
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE *
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:

- "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
- "/S653" DESIGNATES CABLE WITH FOIL SHIELD AND DRAIN. DRAIN IS CONNECTED TO PIN AT THE CONNECTOR.

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION			THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.			3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
MATERIAL SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	DRFT	TR	DATE	09/17/07	DESCRIPTION WK 4.4T-*--WS 4.4T/S653		
APVD			SCALE	1=1.0				
FINISH		CONTACT TURCK FOR MORE INFORMATION	UNIT OF MEASUREMENT MILLIMETER [INCH]			IDENTIFICATION NO.		REV C
SEE SPECIFICATIONS			DO NOT SCALE THIS DRAWING					
		FILE: 777000559				SHEET 1 OF 1		

C	UPDATE MALE COUPLING NUT	NF	04/23/18	56903
REV	DESCRIPTION	BY	DATE	ECO NO.