



FEMALE END VIEW



1 = BROWN
2 = WHITE
3 = BLUE
4 = BLACK


WIRING DIAGRAM

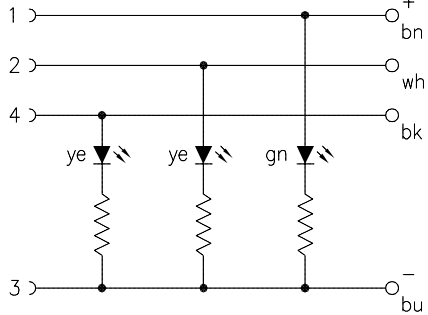


1. +VOLTAGE (GREEN LED)
2. OUTPUT (YELLOW LED)
3. COMMON
4. OUTPUT (YELLOW LED)

SPECIFICATIONS


CONTACT CARRIER MATERIAL	TPU OR NYLON
MOLDED HEAD MATERIAL/COLOR	TPU/CLEAR
CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
RATED CURRENT [A]	4.0 A
RATED VOLTAGE [V]	10-30 V
OUTER CABLE JACKET MATERIAL/COLOR	PVC/GRAY
CONDUCTOR INSULATION MATERIAL	PVC
NUMBER OF CONDUCTORS [AWG]	4x22 AWG
TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP68

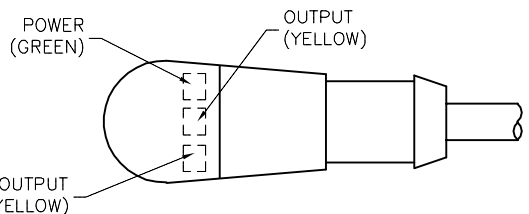

POWER (GREEN)
OUTPUT (YELLOW)

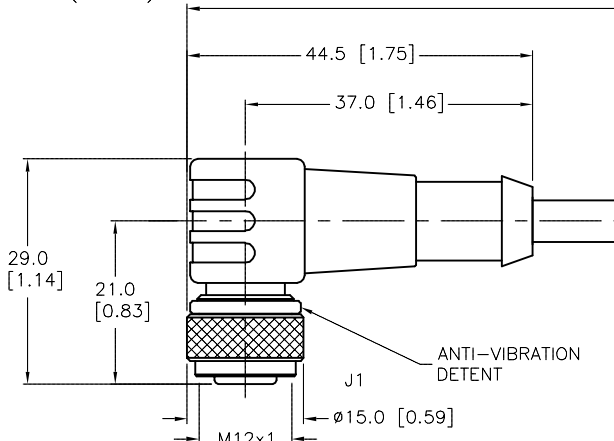

44.5 [1.75]
37.0 [1.46]
29.0 [1.14]
21.0 [0.83]
J1

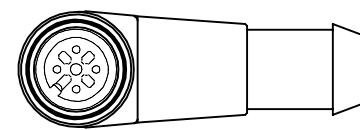

M12x1
Ø15.0 [0.59]

ANTI-VIBRATION DETENT

Ø5.3 [0.21]

50.0 [1.97]
7.0 [0.28]

* METERS
SEE NOTE 1

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

RELATED DOCUMENTS

1.
2.
3.
4.

MATERIAL

FINISH

3RD ANGLE PROJECTION

ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY

CONTACT TURCK FOR MORE INFORMATION

THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.

DRFT CBM
APVD

UNIT OF MEASUREMENT
MILLIMETER [INCH]

DO NOT SCALE THIS DRAWING

DATE 10/09/00
SCALE 1=1.0

DESCRIPTION
WK 4.4T-*--P7X3

IDENTIFICATION NO.

REV

3000 CAMPUS DRIVE
MINNEAPOLIS, MN 55441
1-800-544-7769
(763) 553-7300
(763) 553-0708 fax
www.turck.us

FILE: 777000692

SHEET 1 OF 1

I	ADD ANTI-VIBRATION NOTE	NF	04/18/18	65118
REV	DESCRIPTION	BY	DATE	ECO NO.