


FEMALE END VIEW




- 1 = N/C
2 = N/C
3 = GRAY
4 = RED/BLUE
5 = GREEN
6 = BLUE
7 = GRAY/PINK
8 = WHITE/GREEN
9 = N/C
10 = N/C
11 = N/C
12 = GREEN/YELLOW
13 = N/C
14 = BROWN/GREEN
15 = WHITE
16 = YELLOW
17 = N/C
18 = N/C
19 = BROWN





M23 connector

PANEL CUTOUT (TYPICAL)

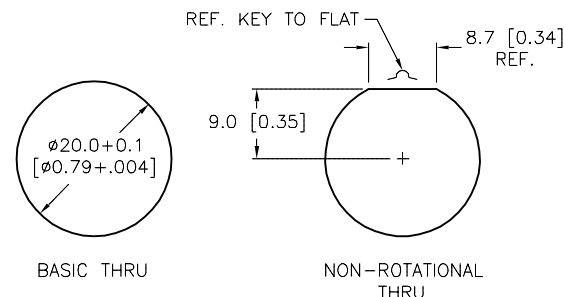

SPECIFICATIONS

CONTACT CARRIER MATERIAL/COLOR	NYLON or PBT/GRAY
CONTACT MATERIAL/PLATING	BRASS/GOLD
CONNECTOR HOUSING MATERIAL/PLATING	BRASS/NICKEL
O-RING/GASKET GASKET	RUBBER (NITRILE or FPM)
RATED CURRENT [A]	9.0 A (PINS 6,12,19), 2.0 A (ALL OTHERS)
RATED VOLTAGE [V]	150 V
CONDUCTOR INSULATION MATERIAL	PVC
MAXIMUM CONDUCTOR SIZE (AWG)	3x18 AWG, 8x22 AWG
TEMPERATURE RANGE	-40°C TO +105°C (-40°F TO +221°F)
PROTECTION CLASS	MEETS IEC IP67
MAXIMUM PANEL THICKNESS	3.5 [0.138]

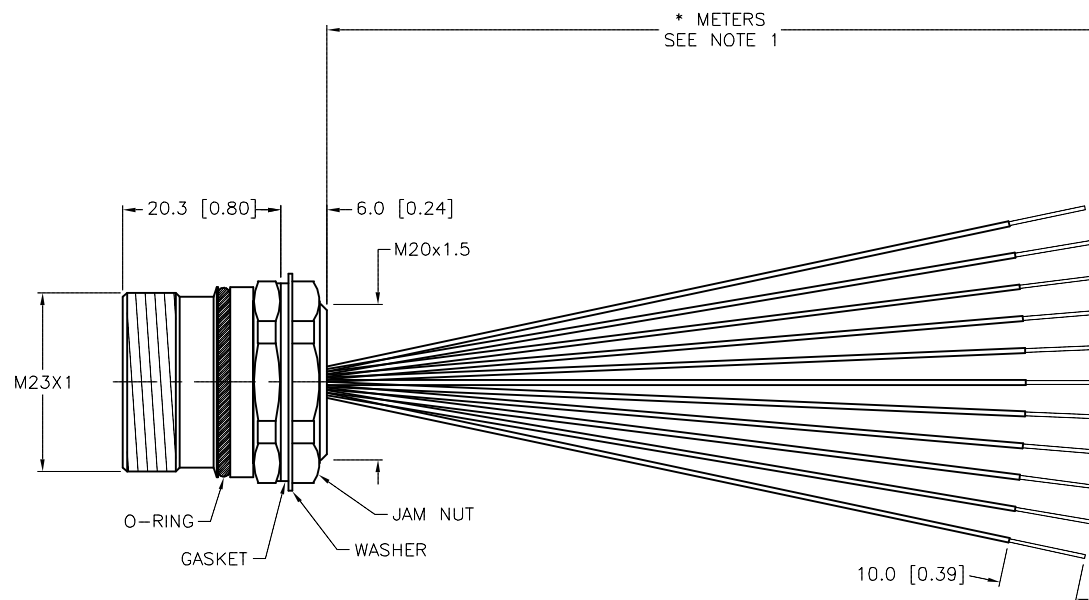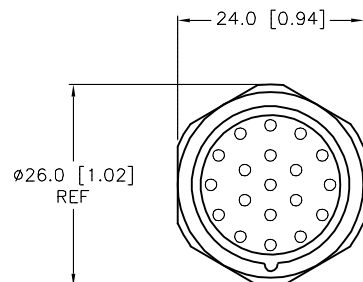

NOTES:

1. "*" INDICATES LEAD LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED. TURCK 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us			
1. 2. 3. 4.							
MATERIAL		DRFT	CBM	DATE	03/10/99	DESCRIPTION CKF 19-11-*	
		APVD		SCALE	1=1.0		
FINISH		UNIT OF MEASUREMENT			IDENTIFICATION NO.		
		MILLIMETER [INCH]					
		DO NOT SCALE THIS DRAWING			FILE: 777000820		
					SHEET 1 OF 1		

F	UPDATE GASKET MATERIAL	NF	11/20/19	75416
REV	DESCRIPTION	BY	DATE	ECO. NO.