




FEMALE END VIEW	MALE END VIEW	SPECIFICATIONS	
 1 = GREEN/YELLOW 2 = RED/BLACK 3 = RED/WHITE 	 1 = RED/BLACK 2 = N/C 3 = GREEN/YELLOW 4 = RED/WHITE 	CONTACT CARRIER MATERIAL	NYLON OR TPU
		MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW
		CONTACT MATERIAL/PLATING	BRASS/GOLD
		COUPLING NUT	BRASS/NICKEL
		RATED CURRENT [A]	4.0 A
		RATED VOLTAGE [V]	250 V
		OUTER JACKET MATERIAL/COLOR	PVC/YELLOW
		CONDUCTOR INSULATION MATERIAL	PVC
		# OF CONDUCTORS [AWG]	3x22 AWG
		TEMPERATURE RANGE	-25°C to +105°C (-13°F to +221°F)
		PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67

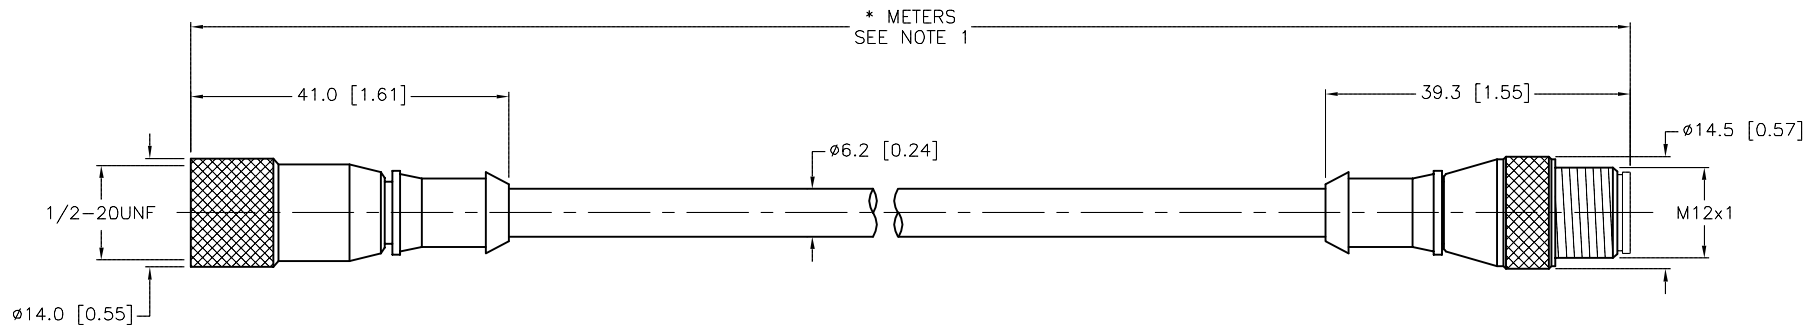


CABLE LENGTH	TOLERANCE *
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE *
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

NOTES:

- "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
- "/S634" DESIGNATES RS 4T MOLDED TO A KB 3T FOR CONNECTION OF A 2-WIRE AC SENSOR TO THE VB 40, 60 OR 80 EUROFAST, NON-LED JUNCTION BOX.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED. TURCK 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us					
1.									
2.									
3.									
4.									
MATERIAL		DRFT IK		DATE 02/13/98		DESCRIPTION KB 3T-*--RS 4T/S634			
		APVD		SCALE 1=1.0					
FINISH		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		UNIT OF MEASUREMENT		IDENTIFICATION NO.		REV F	
				MILLIMETER [INCH]					
		CONTACT TURCK FOR MORE INFORMATION		DO NOT SCALE THIS DRAWING		FILE: 777000928		SHEET 1 OF 1	

F	UPDATED GRN CONDUCTOR TO GRN/YEL PER ECO	TV	09/07/17	61233
REV	DESCRIPTION	BY	DATE	ECO NO.