
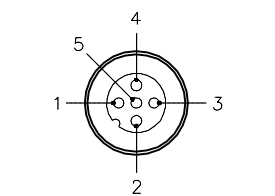
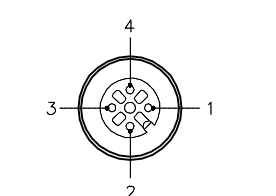
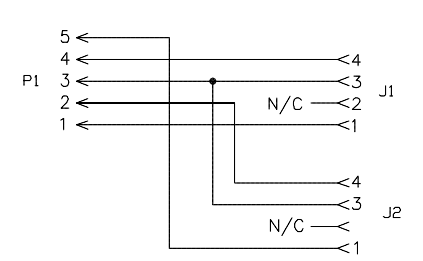
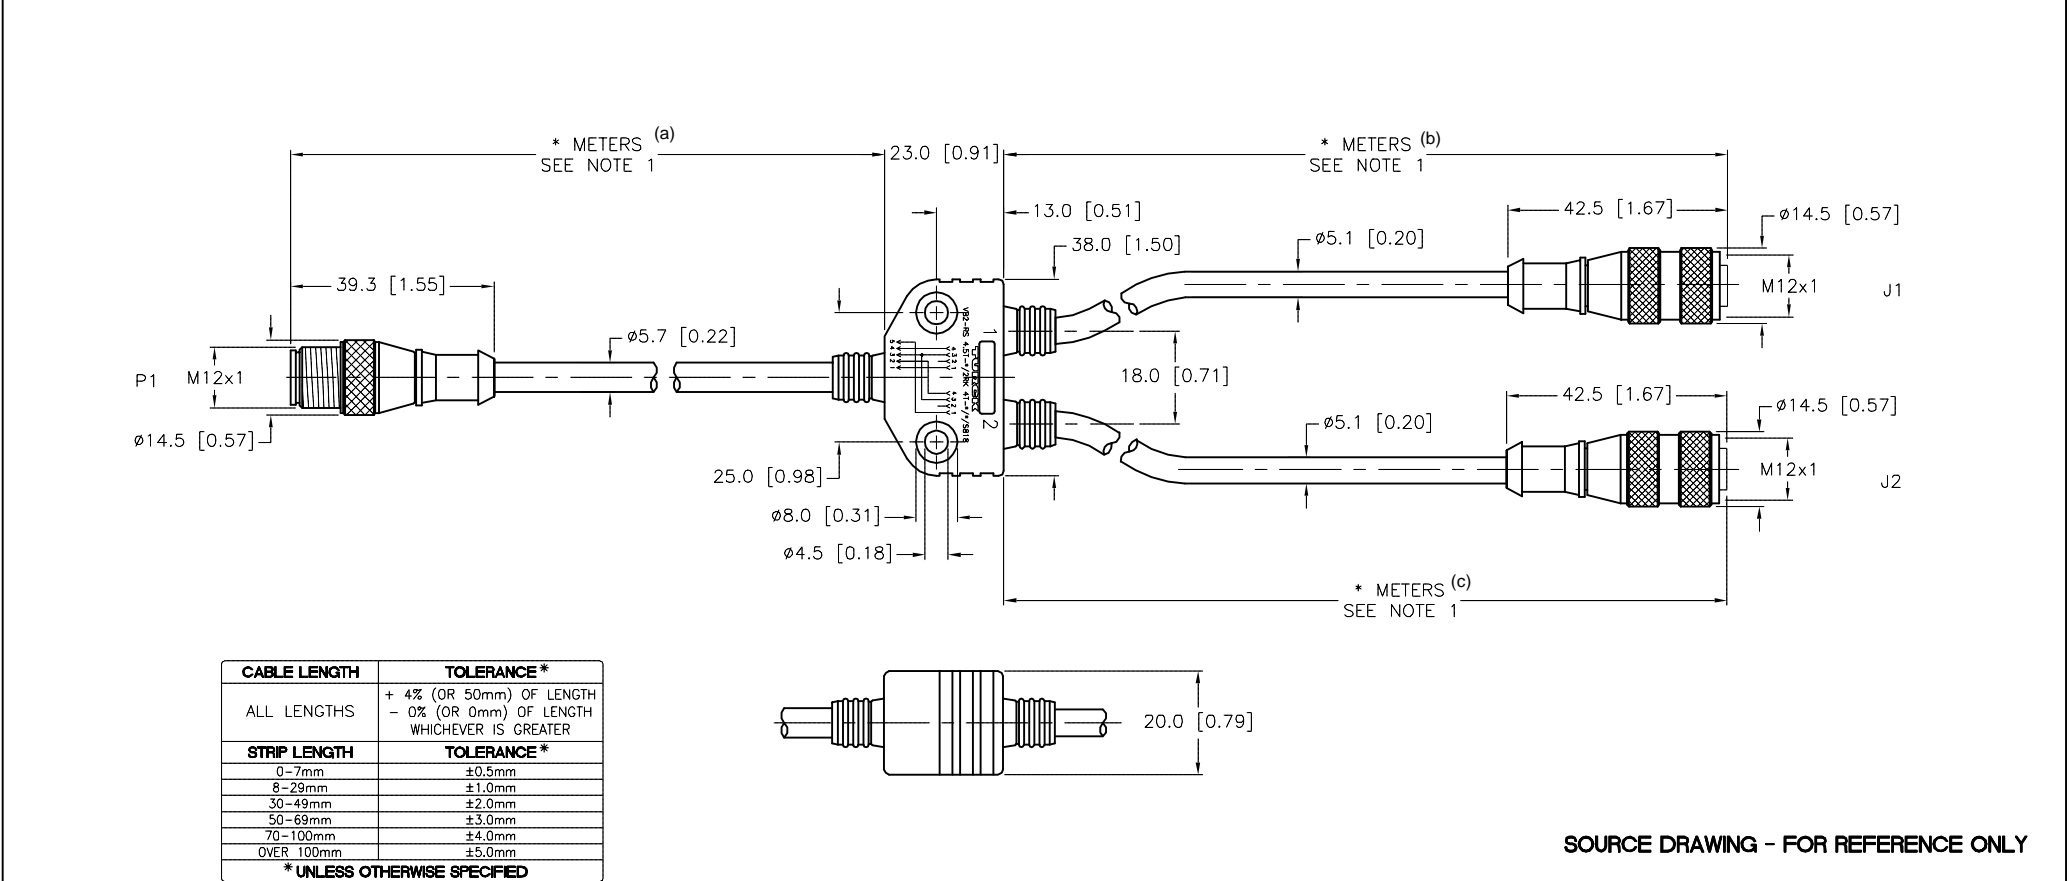


MALE END VIEW	FEMALE END VIEW	WIRING DIAGRAM	SPECIFICATIONS	
			CONTACT CARRIER MATERIAL	NYLON OR TPU
			MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW
			CONTACT MATERIAL/PLATING	BRASS/GOLD
			COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
			RATED CURRENT [A]	4.0 A
			RATED VOLTAGE [V]	250 V
			OUTER JACKET MATERIAL/COLOR	PVC/GREY
			CONDUCTOR INSULATION MATERIAL	PVC
			NUMBER OF OF CONDUCTOR [AWG]	5x22 AWG (P1), 3x22 AWG (J1,J2)
			TEMPERATURE RATING	-40°C to +105°C (-40°F to +221°F)
			PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP68



- NOTES:
- "*" DESIGNATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
 - "/S818" DESIGNATES USED ON BUSSTOP STATIONS TO DETECT FAULTS ON TWO SENSORS THROUGH ONE INPUT CONNECTOR.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS					3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
1. 2. 3. 4.							DRFT IK		DATE 03/25/97	
MATERIAL					ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		APVD		SCALE 1=1.5	
SEE SPECIFICATIONS					CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT		DESCRIPTION (a) (b) (c)	
FINISH					SEE SPECIFICATIONS		MILLIMETER [INCH]		VB2-RS 4.5T-*/2RK 4T-*/S818	
							DO NOT SCALE THIS DRAWING		IDENTIFICATION NO.	
H UPDATE J1,J2 CABLE SPECIFICATIONS					KMY 05/23/14		44672		REV H	
REV DESCRIPTION					BY DATE ECO NO.		FILE: 777001056		SHEET 1 OF 1	