

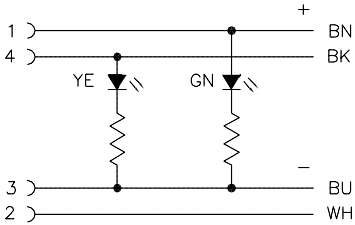



FEMALE END VIEW	WIRING DIAGRAM	SPECIFICATIONS	
 1 = BROWN 2 = WHITE 3 = BLUE 4 = BLACK 	 1 = + VOLTAGE (GREEN LED) 2 = OUTPUT 3 = COMMON 4 = LOAD (YELLOW LED)	CONTACT CARRIER MATERIAL	TPU or NYLON
		MOLDED HEAD MATERIAL/COLOR	TPU/CLEAR
		CONTACT MATERIAL/PLATING	BRASS/GOLD
		COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
		RATED CURRENT [A]	4.0 A LOAD CURRENT/8 mA MAX. OP. (CURRENT AT 30 VDC SUPPLY VOLTAGE)
		RATED VOLTAGE [V]	10-30 VDC
		OUTER JACKET MATERIAL/COLOR	PVC/GREY/PLTC-FT4
		CONDUCTOR INSULATION MATERIAL	PVC
		NUMBER OF CONDUCTORS [AWG]	4x22 AWG, 19 STRANDS PER CONDUCTOR
		TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)
		PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP68

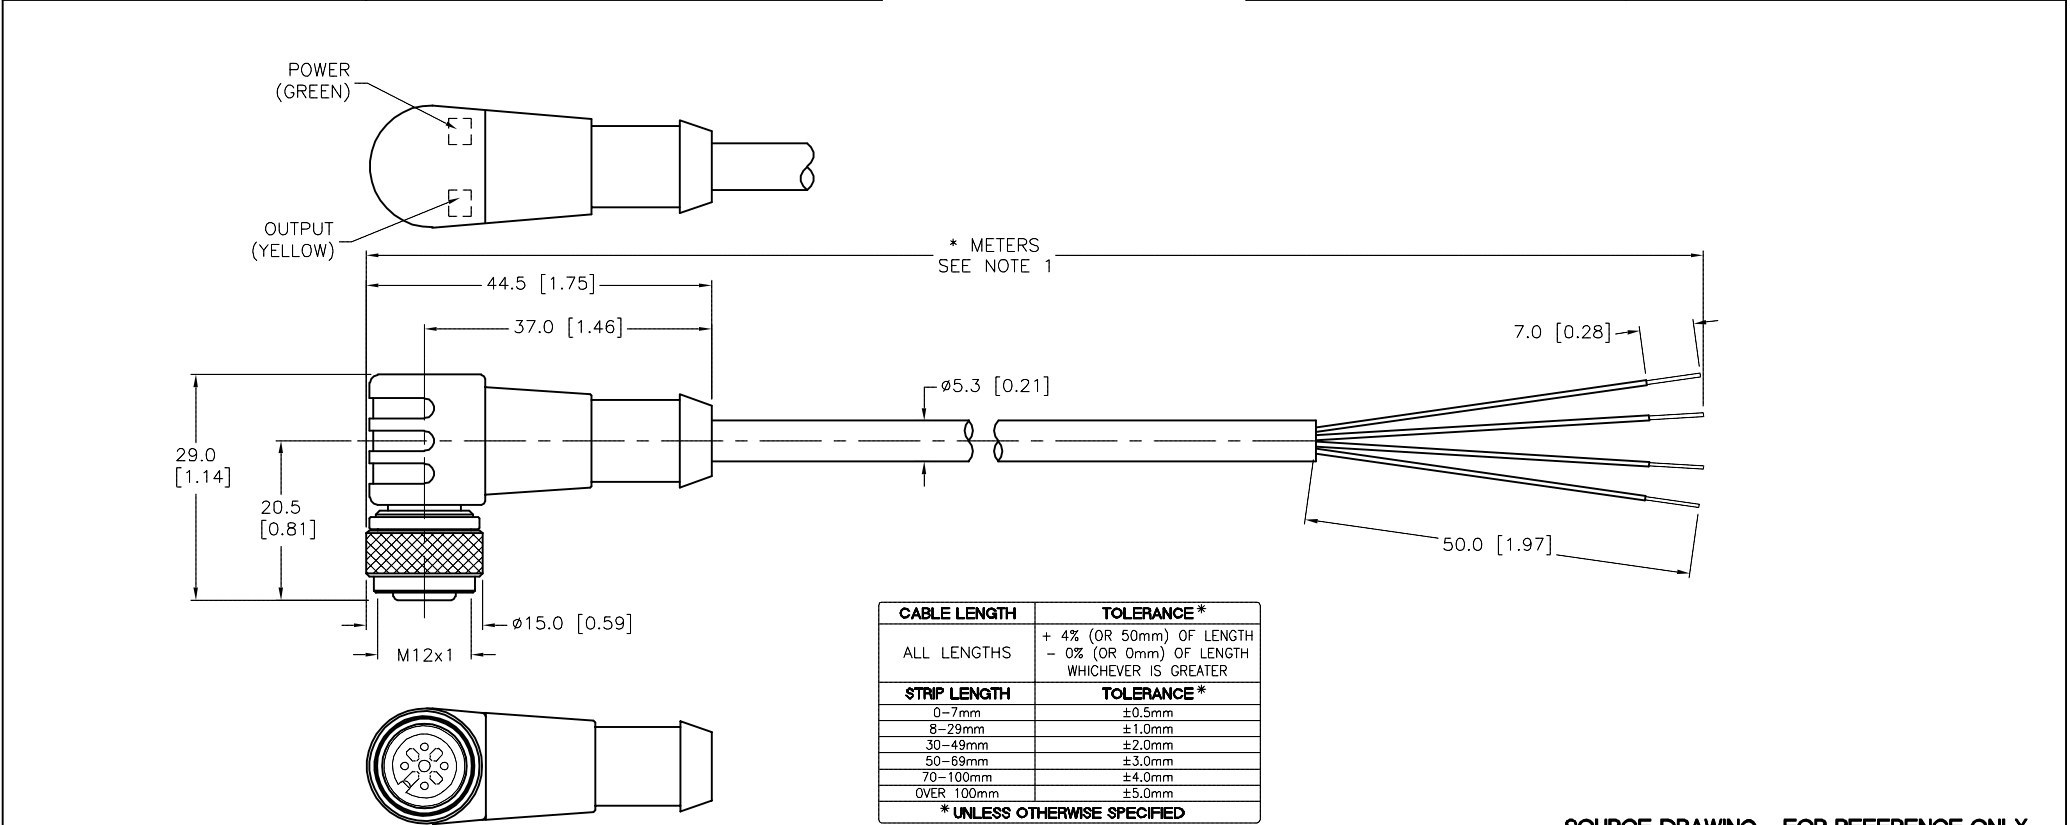

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:

- "*" DESIGNATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
- "/S824" INDICATES PLTC CABLE.

NOTES: 1. "*" DESIGNATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS. 2. "/S824" INDICATES PLTC CABLE.					RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us			
					1. 2. 3. 4.									
					MATERIAL		DRFT JBJ				DATE 06/11/01		DESCRIPTION WK 4.4T-*—P7X2/S824	
					SEE SPECIFICATIONS		APVD				SCALE 1 = 1.0			
					FINISH		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY				UNIT OF MEASUREMENT MILLIMETER [INCH]			
SEE SPECIFICATIONS		CONTACT TURCK FOR MORE INFORMATION												
H	UPDATE LED IN TOP VIEW			NF	03/20/18	64732								
REV	DESCRIPTION			BY	DATE	ECO NO.				FILE:777001059		SHEET 1 OF 1		