
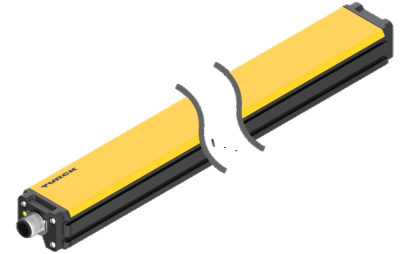


# LI900P0-Q25LM0-ELIU5X3-H1151

## Inductive Linear Position Sensor

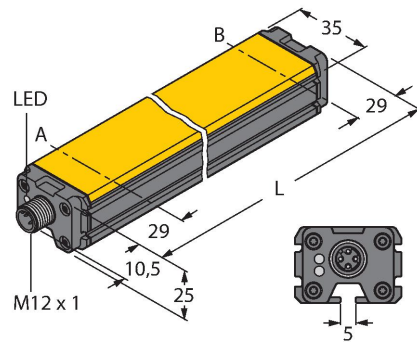



### Technical data

|                                        |                                                                             |
|----------------------------------------|-----------------------------------------------------------------------------|
| Type                                   | LI900P0-Q25LM0-ELIU5X3-H1151                                                |
| ID                                     | 100001940                                                                   |
| Measuring principle                    | Inductive                                                                   |
| <b>General data</b>                    |                                                                             |
| Measuring range                        | 900 mm                                                                      |
| Resolution                             | 16 bit                                                                      |
| Nominal distance                       | 1.5 mm                                                                      |
| Blind zone a                           | 29 mm                                                                       |
| Blind zone b                           | 29 mm                                                                       |
| Repeat accuracy                        | ≤ 0.02 % of full scale                                                      |
| Linearity deviation                    | ≤ 0.035 % f.s. also under the influence of shock and vibration              |
| Temperature drift                      | ≤ ± 0.003 %/K                                                               |
| Hysteresis                             | omitted as a matter of principle                                            |
| <b>Electrical data</b>                 |                                                                             |
| Operating voltage $U_B$                | 15...30 VDC                                                                 |
| Ripple $U_{ss}$                        | ≤ 10 % $U_{Bmax}$                                                           |
| Isolation test voltage                 | 0.5 kV                                                                      |
| Short-circuit protection               | yes                                                                         |
| Wire break/reverse polarity protection | yes/yes (voltage supply)                                                    |
| Output function                        | 5-pin, Analog output                                                        |
| Voltage output                         | 0...10 V                                                                    |
| Current output                         | 4...20 mA                                                                   |
| Diagnostic                             | Positioning element not within detection range: Output signal 24 mA or 11 V |

### Features

- Rectangular, aluminium / plastic
- Versatile mounting possibilities
- Measuring range displayed via LED
- Immune to electromagnetic interference
- Extremely short blind zones
- Resolution, 16-bit
- 4-wire, 15...30 VDC
- Analog output
- Programmable measuring range
- 0...10 V and 4...20 mA, improved machine safety possible through redundancy
- M12 × 1 connector, 5-pin

### Wiring diagram

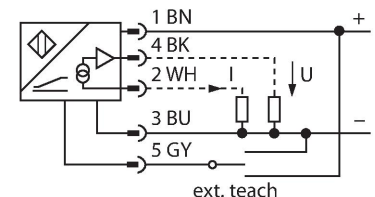


### Functional principle

The measuring principle of linear position sensors is based on RLC coupling between the positioning element and the sensor, whereby an output signal is provided proportional to the

## Technical data



|                                     |                                                   |
|-------------------------------------|---------------------------------------------------|
| Load resistance voltage output      | $\geq 4.7 \text{ k}\Omega$                        |
| Load resistance current output      | $\leq 0.4 \text{ k}\Omega$                        |
| Sample rate                         | 5000 Hz                                           |
| Current consumption                 | < 100 mA                                          |
| <b>Mechanical data</b>              |                                                   |
| Design                              | Profile, Q25L                                     |
| Dimensions                          | 958 x 35 x 25 mm                                  |
| Housing material                    | Aluminum/plastic, PA6-GF30, Anodized              |
| Active area material                | Plastic, PA6-GF30                                 |
| Electrical connection               | Connector, M12 x 1                                |
| <b>Environmental conditions</b>     |                                                   |
| Ambient temperature                 | -25...+70 °C                                      |
| Vibration resistance (EN 60068-2-6) | 20 g; 1.25 h/axis; 3 axes                         |
| Shock resistance (EN 60068-2-27)    | 200 g; 4 ms ½ sine                                |
| Protection class                    | IP66<br>IP67                                      |
| MTTF                                | 138 years acc. to SN 29500 (Ed. 99) 40 °C         |
| Power-on indication                 | LED, Green                                        |
| Measuring range display             | multifunction LED, green, yellow, yellow flashing |
| UL certificate                      | E210608                                           |

position of the positioning element. The rugged sensors are wear and tear-free, thanks to the contactless operating principle. They convince through their excellent repeatability, resolution and linearity within a broad temperature range. The innovative technology ensures a high immunity to electromagnetic DC and AC fields.

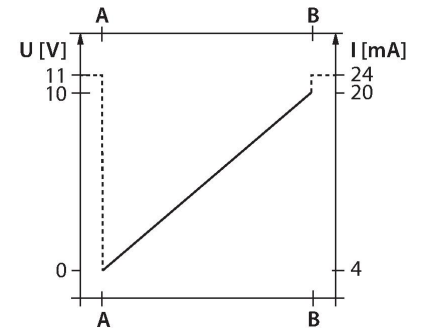

## Mounting instructions

### Mounting instructions/Description

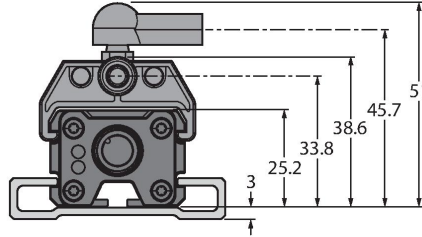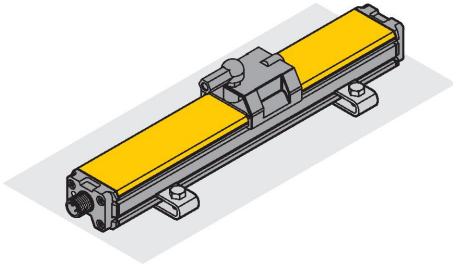

Extensive mounting accessories provide various options for installation. Due to the measuring principle, which is based on the functional principle of an RLC coupling, the linear position sensor is immune to magnetized metal splinters and other interferences.

Status display via LED

Green:

Sensor is supplied properly

LED indicates measuring range

Green:

Positioning element is within the measuring range

Yellow:

Positioning element is within the measuring range, low signal intensity (e.g. distance too large)

Yellow flashing:

Positioning element is outside the detection range

Off:

Positioning element is outside the programmed range (only with teachable versions)

Teaching

The start and end point of the measuring range are set by pressing the button on the teach adapter. Moreover there is the possibility of inverting the course of the output curve.

Zero/Span

Bridge pin 5 and pin 3 for 2 s = sets start value of measuring range

After 2 seconds the green LED is illuminated continuously

Bridge pin 5 and pin 1 for 2 s = sets end value of measuring range

After 2 seconds the green LED is illuminated continuously

Factory setting

Bridge pin 5 and pin 1 for 10 s = factory setting

After 10 seconds the green LED flashes green


Bridge pin 5 and pin 3 for 10 s = factory setting inverted

After 10 seconds the green LED flashes green

Optional:

Bridge pin 5 and pin 1 for 30 s = teach lock active/inactive

After 30 s. the flashing changes to fast flashing  
The configured settings do not need to be locked using the teach lock because as a general rule they are saved in the sensor's non-volatile memory even after power is lost. The teach lock is recommended in situations where it is necessary to prevent subsequent alteration of the parameters.

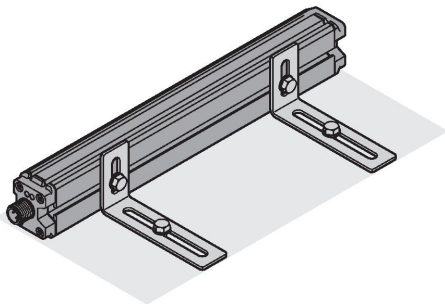


## Accessories

### P1-LI-Q25L

6901041


Guided positioning element for linear position sensors LI-Q25L, inserted in the groove of the sensor



### P2-LI-Q25L

6901042


Floating positioning element for linear position sensors LI-Q25L; the nominal distance to the sensor is 1.5 mm; pairing with the linear position sensor at a distance of up to 5 mm or misalignment tolerance of up to 4 mm.



### P3-LI-Q25L

6901044


Floating positioning element for Li-Q25L linear position sensors; operational at an offset of 90°; nominal distance to sensor 1.5 mm; pairing with linear position sensor at a distance of up to 5 mm; misalignment tolerance of up to 4 mm



### P6-LI-Q25L

6901069


Floating positioning element for linear position sensors LI-Q25L; the nominal distance to the sensor is 1.5 mm; pairing with the linear position sensor at a distance of up to 5 mm or misalignment tolerance of up to 4 mm.



### P7-LI-Q25L

6901087


Guided positioning element for linear position sensors LI-Q25L, without ball joint



### M1-Q25L

6901045


Mounting foot for linear position sensors LI-Q25L; material: aluminum; 2 pcs. per bag



### M2-Q25L

6901046


Mounting foot for linear position sensors LI-Q25L; material: aluminum; 2 pcs. per bag



### M4-Q25L

6901048


Mounting bracket and sliding block for linear position sensors LI-Q25L; material: Stainless steel; 2 pcs. per bag



### MN-M4-Q25

6901025


Sliding block with M4 thread for the backside profile of the LI-Q25L; material: galvanized steel; 10 pcs. per bag



### AB-M5

6901057


Axial Joint for Guided Positioning Elements



ABVA-M5

6901058

Axial joint for guided positioning  
element, stainless steel



RBVA-M5

6901059

Angle joint for guided positioning  
element, stainless steel

