


SPECIFICATIONS						
CONTACT CARRIER MATERIAL	NYLON or TPU					
MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW					
CONTACT MATERIAL/PLATING	BRASS/GOLD					
COUPLING NUT MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED					
RATED CURRENT [A]	4.0 A					
RATED VOLTAGE [V]	250 V					
OUTER CABLE JACKET MATERIAL/COLOR	PVC/YELLOW					
CONDUCTOR INSULATION MATERIAL	PVC					
NUMBER OF CONDUCTORS [AWG]	3×22 AWG					
TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)					
PROTECTION CLASS	NEMA 1,3,4,6P AND IEC IP67, IP68, IP69K					

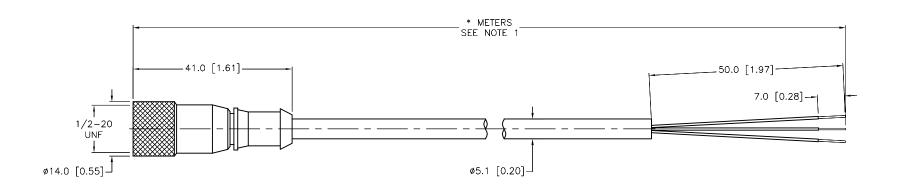

CABLE LENGTH	TOLERANCE *								
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER								
STRIP LENGTH	TOLERANCE *								
0-7mm	±0.5mm ±1.0mm								
8-29mm									
30-49mm	±2.0mm ±3.0mm ±4.0mm								
50-69mm									
70-100mm									
OVER 100mm	±5.0mm								
* UNLESS OTHERWISE SPECIFIED									

SOURCE DRAWING - FOR REFERENCE ONLY

- 1	I OVER 100mm I ±5.0mm										
	* UNLESS OTHERWISE SPECIFIED				RELATED DOCUMENTS	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE				AMPUS DRIVE LIS. MN 55441
1	NOTES:	1. 2. 3. 4.		PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		RC	1-800 (763) (763)				
'	. "*" DESIGNATES CABLE LENGTH IN METERS. CONTACT LENGTHS.	MATERIAL			DATE 10/01/07	DESCRIPTION	KBV 3T-*				
	LENGIAS.		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR	APVD	SCALE 1=1.0						
				UNIT OF MEASUREMENT							
					FINISH	REFERENCE ONLY	Sittle St. Mericonement		IDENTIFICATION NO.		REV
		TINISH	CONTACT TURCK	MILLIMETER [INCH]							
D	UPDATED GRN CONDUCTOR TO GRN/YEL PER ECO	TV	09/08/17	60438		INFORMATION					
REV	DESCRIPTION	BY	DATE	ECO NO.			DO NOT SCALE	THIS DRAWING	FILE: 777001184		SHEET 1 OF 1