






FEMALE END VIEW	MALE END VIEW	SPECIFICATIONS	
 1 = WHITE 2 = BROWN 3 = GREEN 4 = YELLOW 5 = GRAY 6 = PINK 7 = BLUE 8 = RED	 1 = WHITE 2 = BROWN 3 = GREEN 4 = YELLOW 5 = GRAY 6 = PINK 7 = BLUE 8 = RED	CONTACT CARRIER MATERIAL	NYLON OR TPU
		MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW
		CONTACT MATERIAL/PLATING	BRASS/GOLD
		COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
		RATED CURRENT [A]	2.0 A
		RATED VOLTAGE [V]	60 VAC/75 VDC
		OUTER CABLE JACKET MATERIAL/COLOR	PVC/GREY
		CONDUCTOR INSULATION MATERIAL	PVC
		NUMBER OF CONDUCTORS [AWG]	8x24 AWG
		TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)
		PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP68

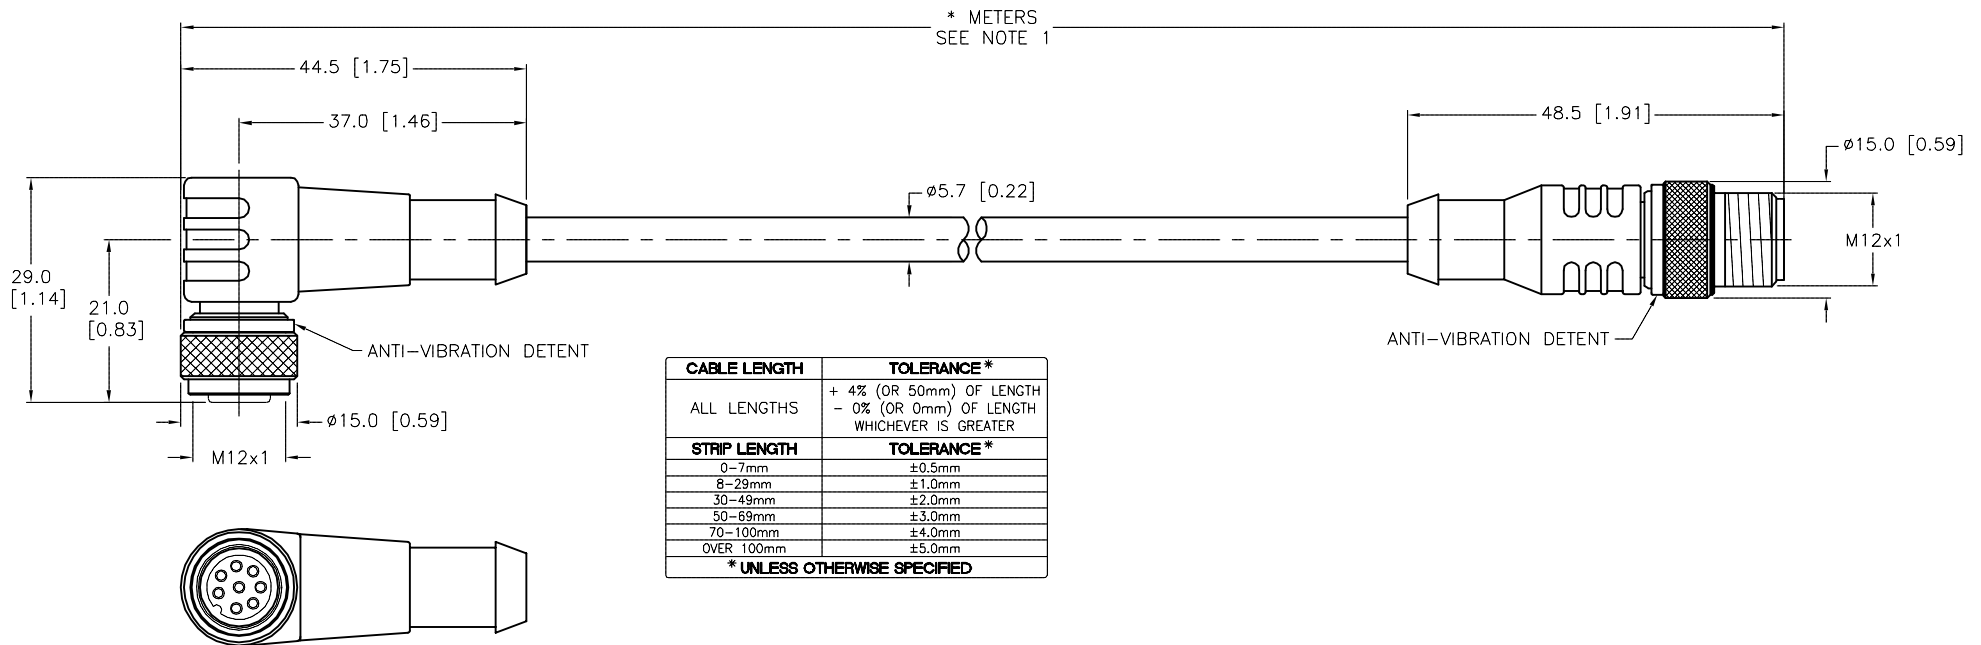

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

RELATED DOCUMENTS		3RD ANGLE PROJECTION				THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.				3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us				
1.														
2.				DRFT		RDS	DATE	05/30/07	DESCRIPTION WKC 8T-*--RSC 8T					
3.				APVD			SCALE	1=1.0						
4.						UNIT OF MEASUREMENT			IDENTIFICATION NO.			REV B		
SEE SPECIFICATIONS		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		MILLIMETER [INCH]			FILE: 777001368							
FINISH										CONTACT TURCK FOR MORE INFORMATION		DO NOT SCALE THIS DRAWING		
SEE SPECIFICATIONS														
										SHEET 1 OF 1				