



- 1 = WHITE/BLACK
2 = BLACK/WHITE
3 = WHITE/GREEN
4 = GREEN/WHITE
5 = WHITE/RED
6 = DRAIN
7 = RED/WHITE
8 = WHITE/ORANGE
9 = ORANGE/WHITE
10 = WHITE/BLUE
11 = BLUE/WHITE
12 = GREEN/YELLOW
13 = WHITE/BROWN
14 = BROWN/WHITE
15 = WHITE/YELLOW
16 = YELLOW/WHITE
17 = WHITE/VIOLET
18 = VIOLET/WHITE
19 = N/C

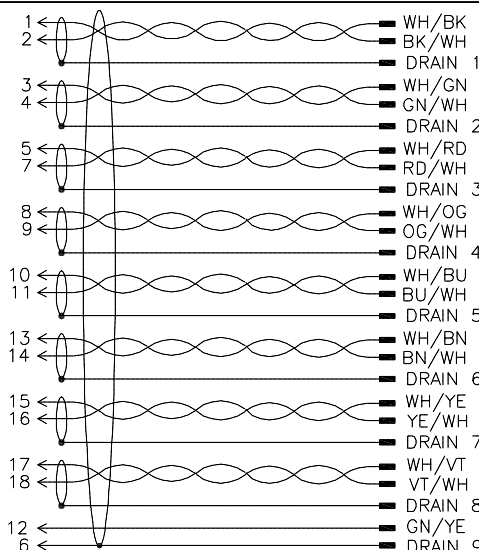


SPECIFICATIONS	
CONTACT CARRIER MATERIAL	NYLON or PBT
MOLDED HEAD MATERIAL/COLOR	TPU/BLACK
CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
RATED CURRENT [A]	2.0 A
RATED VOLTAGE [V]	150 V
OUTER JACKET MATERIAL/COLOR	PVC/PLUM
CONDUCTOR INSULATION MATERIAL	PVC
NUMBER OF CONDUCTORS [AWG]	16x22 AWG, 1x18 AWG GROUND
DRAIN/SHIELD	9x22 AWG DRAINS/ALUMINUM FOIL SHIELDED
CONDUCTOR ARRANGEMENT	8 SHIELDED TWISTED PAIR W/DRAIN, 1 GND, 1 DRAIN
TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)
PROTECTION CLASS	MEETS IEC IP67
CABLE RATINGS	UL: ITC/PLTC/AWM, 105C, 300 V CSA: CMG/AWM, 105C, 300 V

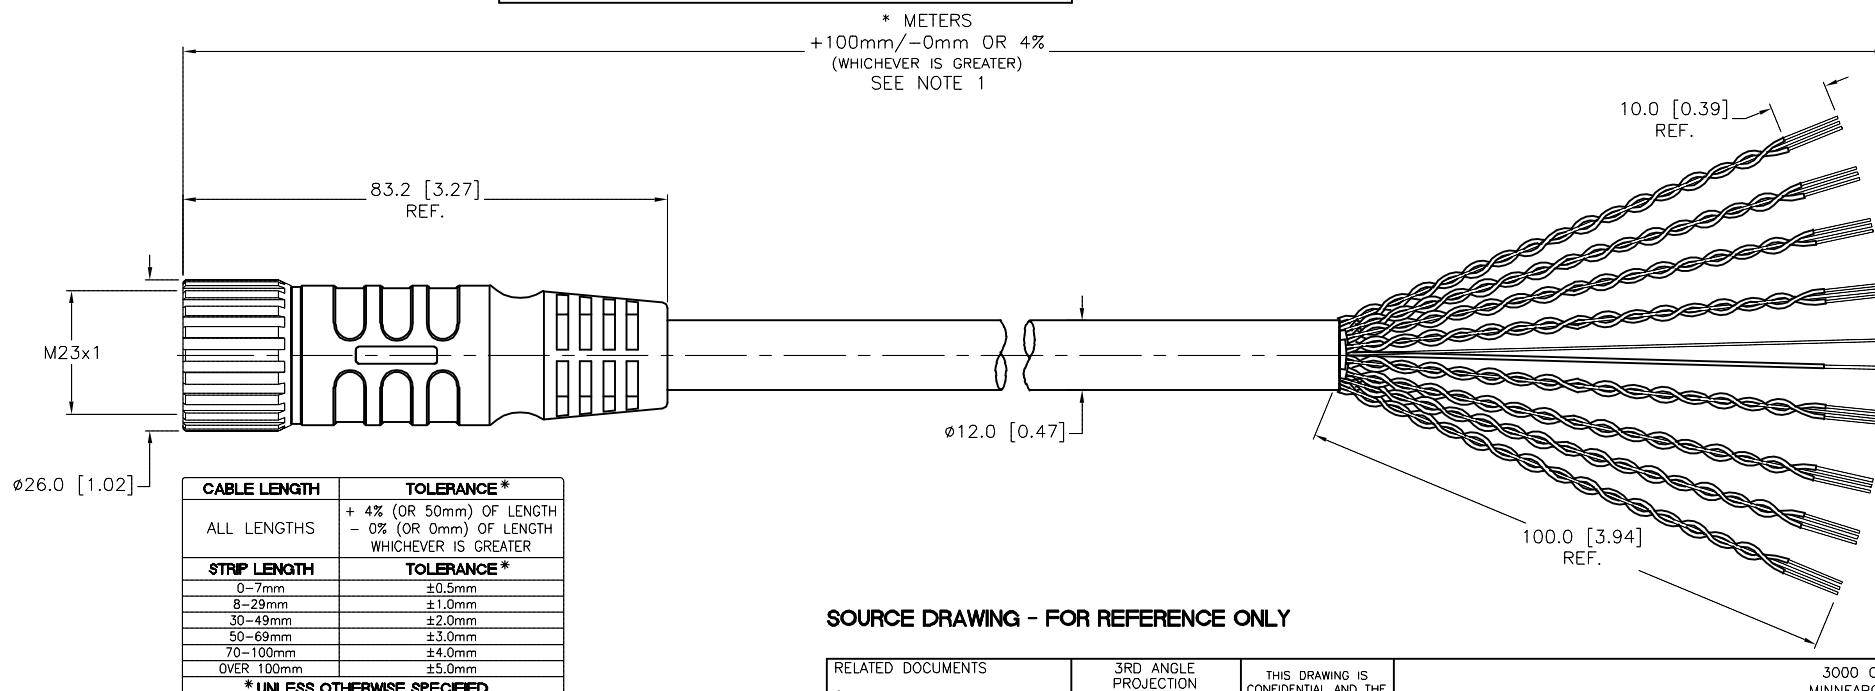

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED. TURCK		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us			
1.									
2.		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		DRFT	RDS	DATE	05/19/03	DESCRIPTION P-CSM 19-959-*	
3.				APVD		SCALE	1=1.3		
4.		CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT			IDENTIFICATION NO.		REV G
				MILLIMETER [INCH]					
		SEE SPECIFICATIONS		DO NOT SCALE THIS DRAWING			FILE: 777001417		SHEET 1 OF 1
				SEE SPECIFICATIONS					

G	UPDATE RATED CURRENT	NF	04/19/19	69449
REV	DESCRIPTION	BY	DATE	ECO NO.