



SPECIFICATIONS					
CONTACT CARRIER MATERIAL	NYLON or TPU				
MOLDED HEAD MATERIAL/COLOR	TPU/BLACK				
CONTACT MATERIAL/PLATING	BRASS/GOLD				
HOUSING MATERIAL/FINISH	BRASS/NICKEL				
RATED CURRENT [A]	4.0 A				
RATED VOLTAGE [V]	250 V				
OUTER JACKET MATERIAL/COLOR	PVC/PLUM				
CONDUCTOR INSULATION MATERIAL	PVC				
CONDUCTORS	3x18 AWG				
DRAIN/SHIELD	20 AWG DRAIN/ALUMINUM FOIL SHIELD				
TEMPERATURE RATING	-40°C to +105°C (-40°F to +221°F)				
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67				
CONDUCTOR ARRANGEMENT	1 SHIELDED TWISTED PAIR, 1 GROUND, 1 DRAIN				
CABLE RATINGS	UL: ITC/PLTC/AWM, 105°C, 300 V				
•	CSA: CMG/AWM, 105°C, 300 V				



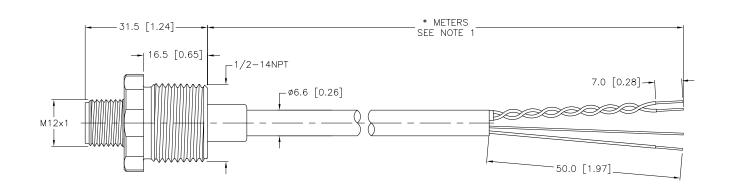

CABLE LENGTH	TOLERANCE			
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER			
STRIP LENGTH	TOLERANCE			
0-7mm	±0.5mm			
8-29mm	±1.0mm			
30-49mm	±2.0mm			
50-69mm	±3.0mm			
70-100mm	±4.0mm			
OVER 100mm	±5.0mm			

SOURCE DRAWING - FOR REFERENCE ONLY

SHEET 1 OF 1

FILE: EURO-R\777001450

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	High Technology	3000 CAMPUS MINNEAPOLIS, MINNEA	N 5544 7769 7300 0708 fo
MATERIAL		DRFT JBJ	DATE 01/10/03	DESCRIPTION P-FS 4-949-*/14.5/NP	г
SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS	DSGN	SCALE 1=1.0	P-F5 4-949-"/ 14.5/NP	l
	DRAWING ARE FOR REFERENCE ONLY	UNIT OF MEASUREMENT		IDENTIFICATION NO.	RE\
FINISH				IDENTIFICATION NO.	I KE
 SEE SPECIFICATIONS	CONTACT TURCK FOR MORE INFORMATION	MILLIMETER [INCH]			E

DO NOT SCALE THIS DRAWING

NOTES:

1. "*" DESIGNATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

В	UPDATE CABLE OD	CK	08/25/11	35962
REV	DESCRIPTION	BY	DATE	ECO NO.