




FEMALE END VIEW		MALE END VIEW		SPECIFICATIONS																													
																																	
1 = BLUE 2 = BROWN 3 = DRAIN 4 = GREEN/YELLOW		1 = BLUE 2 = BROWN 3 = DRAIN 4 = GREEN/YELLOW																															
																																	
				<table><tr><td>CONTACT CARRIER MATERIAL</td><td>TPU</td></tr><tr><td>MOLDED HEAD MATERIAL/COLOR</td><td>TPU/BLACK</td></tr><tr><td>CONTACT MATERIAL/PLATING</td><td>BRASS/GOLD</td></tr><tr><td>COUPLING NUT MATERIAL/PLATING</td><td>BRASS/NICKEL</td></tr><tr><td>RATED CURRENT [A]</td><td>4.0 A</td></tr><tr><td>RATED VOLTAGE [V]</td><td>250 V</td></tr><tr><td>OUTER JACKET MATERIAL/COLOR</td><td>PVC/PLUM</td></tr><tr><td>CONDUCTOR INSULATION MATERIAL</td><td>PVC</td></tr><tr><td>CONDUCTORS</td><td>3x18 AWG</td></tr><tr><td>DRAIN/SHIELD</td><td>20 AWG DRAIN/ALUMINUM FOIL SHIELD</td></tr><tr><td>TEMPERATURE RATING</td><td>-40°C to +105°C (-40°F to +221°F)</td></tr><tr><td>PROTECTION CLASS</td><td>NEMA 1,3,4,6P AND IEC IP68, IP69K</td></tr><tr><td>CONDUCTOR ARRANGEMENT</td><td>1 SHIELDED TWISTED PAIR, 1 GROUND, 1 DRAIN</td></tr><tr><td>CABLE RATINGS</td><td>UL: ITC/PLTC/AWM, 105°C, 300 V CSA: CMG/AWM, 105°C, 300 V</td></tr></table>		CONTACT CARRIER MATERIAL	TPU	MOLDED HEAD MATERIAL/COLOR	TPU/BLACK	CONTACT MATERIAL/PLATING	BRASS/GOLD	COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL	RATED CURRENT [A]	4.0 A	RATED VOLTAGE [V]	250 V	OUTER JACKET MATERIAL/COLOR	PVC/PLUM	CONDUCTOR INSULATION MATERIAL	PVC	CONDUCTORS	3x18 AWG	DRAIN/SHIELD	20 AWG DRAIN/ALUMINUM FOIL SHIELD	TEMPERATURE RATING	-40°C to +105°C (-40°F to +221°F)	PROTECTION CLASS	NEMA 1,3,4,6P AND IEC IP68, IP69K	CONDUCTOR ARRANGEMENT	1 SHIELDED TWISTED PAIR, 1 GROUND, 1 DRAIN	CABLE RATINGS	UL: ITC/PLTC/AWM, 105°C, 300 V CSA: CMG/AWM, 105°C, 300 V
CONTACT CARRIER MATERIAL	TPU																																
MOLDED HEAD MATERIAL/COLOR	TPU/BLACK																																
CONTACT MATERIAL/PLATING	BRASS/GOLD																																
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL																																
RATED CURRENT [A]	4.0 A																																
RATED VOLTAGE [V]	250 V																																
OUTER JACKET MATERIAL/COLOR	PVC/PLUM																																
CONDUCTOR INSULATION MATERIAL	PVC																																
CONDUCTORS	3x18 AWG																																
DRAIN/SHIELD	20 AWG DRAIN/ALUMINUM FOIL SHIELD																																
TEMPERATURE RATING	-40°C to +105°C (-40°F to +221°F)																																
PROTECTION CLASS	NEMA 1,3,4,6P AND IEC IP68, IP69K																																
CONDUCTOR ARRANGEMENT	1 SHIELDED TWISTED PAIR, 1 GROUND, 1 DRAIN																																
CABLE RATINGS	UL: ITC/PLTC/AWM, 105°C, 300 V CSA: CMG/AWM, 105°C, 300 V																																

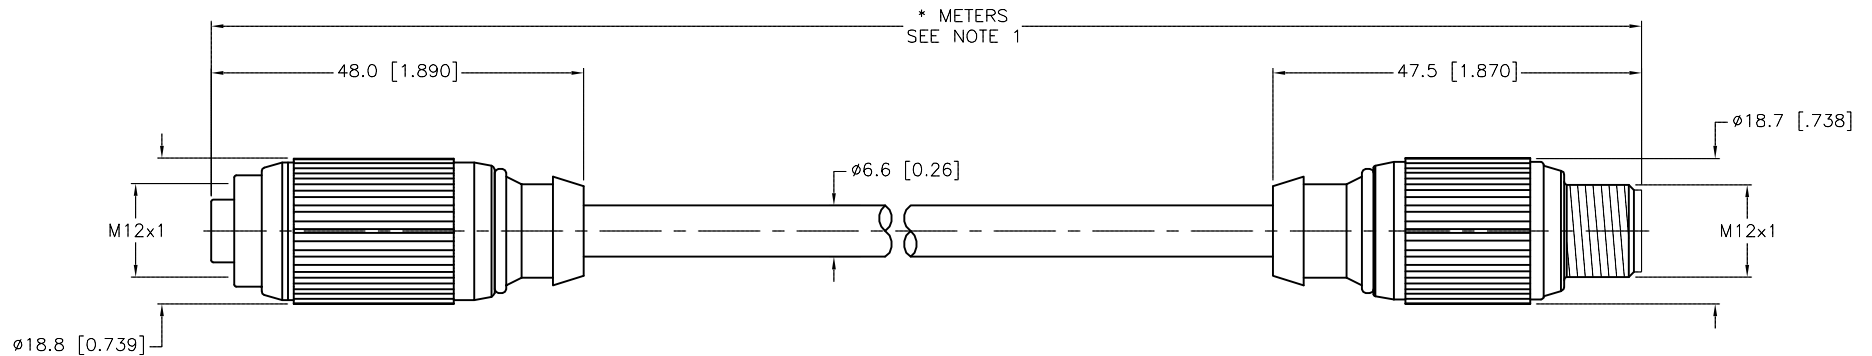


CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS 1. 2. 3. 4.		3RD ANGLE PROJECTION 		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		TURCK INC High Technology Sensors and Automation Controls 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com	
MATERIAL SEE SPECIFICATIONS		DRFT JBJ DSGN		DATE 12/04/02 SCALE 1=1.0		DESCRIPTION P-RKG 4T-949-* -RSG 4T	
FINISH SEE SPECIFICATIONS		UNIT OF MEASUREMENT MILLIMETER [INCH]		IDENTIFICATION NO.		REV F	
DO NOT SCALE THIS DRAWING		FILE: 777001477		SHEET 1 OF 1			

F	UPDATE CABLE OD	CK	08/25/11	35962
REV	DESCRIPTION	BY	DATE	ECO NO.