




MALE END VIEW	FEMALE END VIEW	SPECIFICATIONS	
 1 = BLUE 2 = BROWN 3 = DRAIN 4 = GREEN/YELLOW 	 1 = BLUE 2 = BROWN 3 = DRAIN 4 = GREEN/YELLOW 	CONTACT CARRIER MATERIAL	TPU
		MOLDED HEAD MATERIAL/COLOR	TPU/BLACK
		CONTACT MATERIAL/PLATING	BRASS/GOLD
		COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
		RATED CURRENT [A]	9.0 A
		RATED VOLTAGE [V]	300 V
		OUTER JACKET MATERIAL/COLOR	PVC/PLUM
		CONDUCTOR INSULATION MATERIAL	PVC
		CONDUCTORS	3x18 AWG
		DRAIN/SHIELD	20 AWG/ALUMINUM-POLYESTER FOIL
		TEMPERATURE RATING	-40°C to +105°C (-40°F to +221°F)
		PROTECTION CLASS	NEMA 1,3,4,6P,12 & IECIP67, IP68,IP69,IP69K
		CONDUCTOR ARRANGEMENT	1 SHIELDED TWISTED PAIR, 1 GROUND, 1 DRAIN
		CABLE RATINGS	UL: ITC/PLTC/AWM, 105°C, 300 V CSA: CMG/AWM, 105°C, 300 V

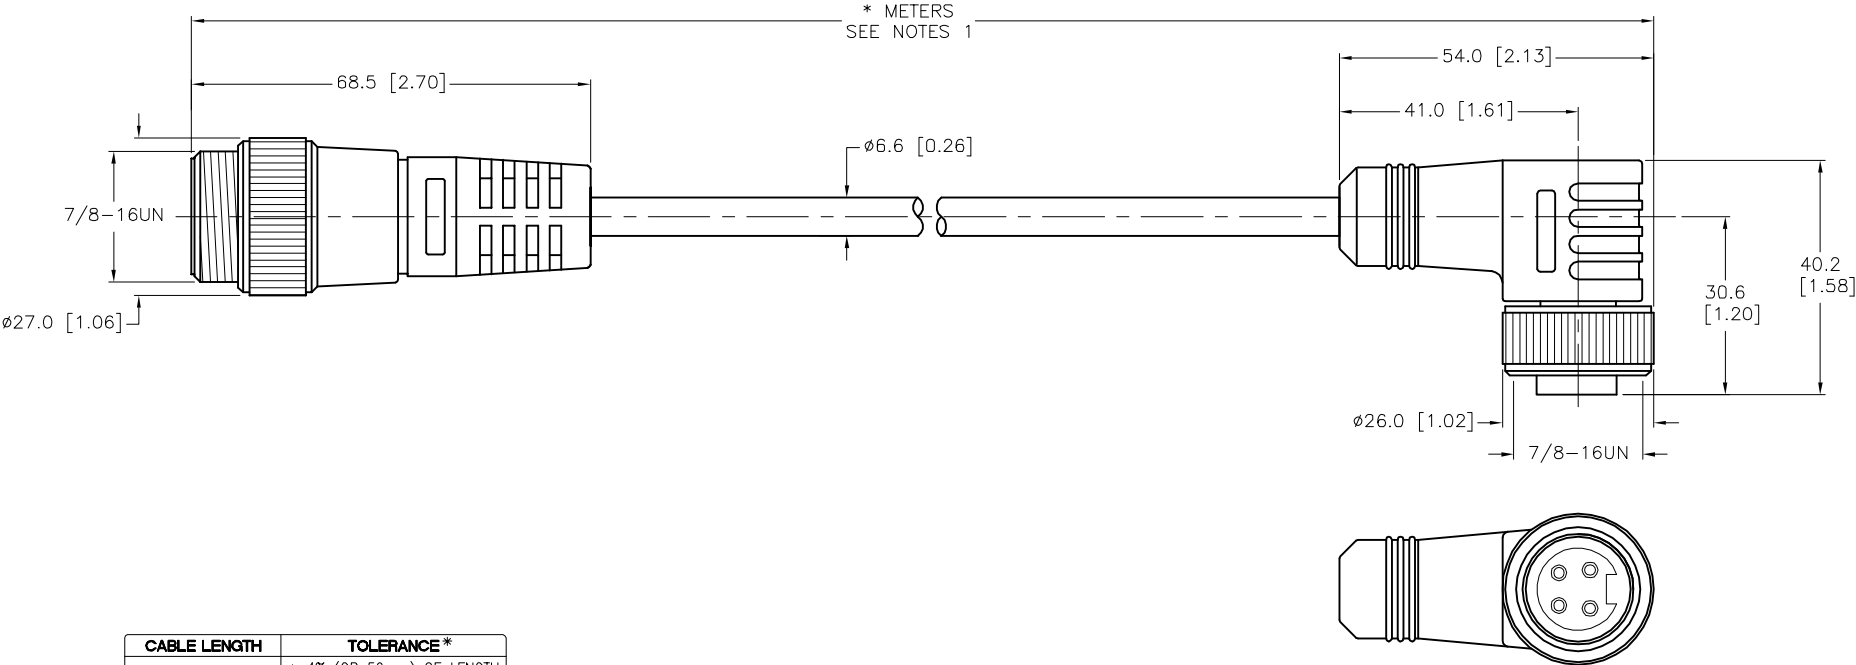


CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

F	UPDATE PROTECTION CLASS	CBM	04/13/21	76628
REV	DESCRIPTION	BY	DATE	ECO NO.

RELATED DOCUMENTS	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
1. 2. 3. 4.					
MATERIAL	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	DRFT	RDS	DATE	05/29/03
SEE SPECIFICATIONS		APVD	GC	SCALE	1 = 1.3
FINISH		UNIT OF MEASUREMENT			IDENTIFICATION NO.
SEE SPECIFICATIONS		MILLIMETER [INCH]			
	CONTACT TURCK FOR MORE INFORMATION	DO NOT SCALE THIS DRAWING			REV F
		FILE: 777001519			SHEET 1 OF 1