


# BIM-M12-Y0/S300

## Magnetic Field Sensor – with extended temperature range

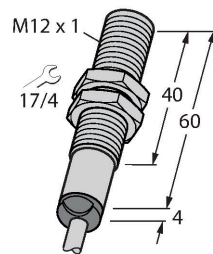


### Technical data

Type	BIM-M12-Y0/S300
ID	1070021
Special version	S300 Corresponds to: Max. ambient temperature = 130 °C, silicone cable, BIM version, including S235
<b>General data</b>	
Rated switching distance	90 mm
Repeat accuracy	≤ 0.3 % of full scale
Temperature drift	≤ ±15 %
Hysteresis	1...10 %
<b>Electrical data</b>	
Output function	2-wire, NAMUR
Switching frequency	1 kHz
Voltage	Nom. 8.2 VDC
Current consumption non-actuated	≤ 1.2 mA
Actuated current consumption	≥ 2.1 mA
<b>Mechanical data</b>	
Design	Threaded barrel, M12 x 1
Dimensions	64 mm
Housing material	Metal, CuZn, Chrome-plated
Active area material	Plastic, PBT-GF30
End cap	Metal, CuZn
Max. tightening torque of housing nut	10 Nm
Electrical connection	Cable

### Features

- Threaded barrel, M12 x 1
- Chrome-plated brass
- For temperatures up to 130°C
- Magnet-inductive proximity sensor
- Rated switching distance 90 mm with DMR31-15-5 magnet
- DC 2-wire, nom. 8.2 VDC
- Output acc. to EN 60947-5-6 (NAMUR)
- Cable connection

### Wiring diagram




### Functional principle

Magnetic inductive proximity sensors are actuated by magnetic fields and are thus capable of detecting permanent magnets through non-ferromagnetic materials (e.g. wood, plastic, non-ferrous metals, aluminium, stainless steel). Thus it is possible to achieve large switching distances even with smaller housing styles. In combination with the actuation magnet DMR31-15-5 TURCK sensors of the series M12 feature a nominal switching distance of 90 mm. Thus there are multiple detection possibilities, particularly if mounting space is limited or other difficult sensing conditions prevail.

## Technical data

Cable quality	Ø 5.2 mm, Red brown, SiHSi, Silicone, 2 m
Core cross-section	2 x 0.5 mm <sup>2</sup>
Environmental conditions	
Ambient temperature	0...+130 °C
Vibration resistance	55 Hz (1 mm)
Shock resistance	30 g (11 ms)

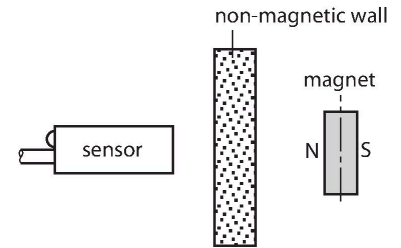

## Mounting instructions

Mounting instructions/Description	Diameter active area B	Ø 12 mm
-----------------------------------	------------------------	---------

## Accessories

<b>DMR15-6-3</b> 	<b>6900216</b> Actuation magnet, Ø 15 mm (Ø 3 mm), h: 6 mm; attainable switching distance 36 mm on BIM-(E)M12 magnetic field sensors or 32 mm on BIM-EG08 magnetic field sensors; for Q25L linear position sensors: recommended distance between the sensor and magnet: 3...4 mm	<b>DMR20-10-4</b> 	<b>6900214</b> Actuation magnet; Ø 20 mm (Ø 4 mm), h: 10 mm; attainable switching distance 59 mm on BIM-(E)M12 magnetic field sensors or 50 mm on BIM-EG08 magnetic field sensors; for Q25L linear position sensors: recommended distance between the sensor and magnet: 3...4 mm
<b>DMR31-15-5</b> 	<b>6900215</b> Actuation magnet, Ø 31 mm (Ø 5 mm), h: 15 mm; attainable switching distance 90 mm on BIM-(E)M12 magnetic field sensors or 78 mm on BIM-EG08 magnetic field sensors; for Q25L linear position sensors: recommended distance between the sensor and magnet: 3...5 mm	<b>MW12</b> 	<b>6945003</b> Mounting bracket for threaded barrel sensors; material: Stainless steel A2 1.4301 (AISI 304)