



SPECIFICATIONS					
CONTACT CARRIER MATERIAL	NYLON OR TPU				
CONTACT MATERIAL/PLATING	BRASS/GOLD				
HOUSING, LOCKNUT MATERIAL/PLATING	BRASS/NICKEL				
O-RING MATERIAL	NITRILE				
RATED CURRENT [A]	2.0 A				
RATED VOLTAGE [V]	30 V				
NUMBER OF CONDUCTORS [AWG]	12x24 AWG				
TEMPERATURE RATING	-40°C to +105°C (-40°F to +221°F)				
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP68				
MAX. PANEL THICKNESS	3.0 [0.12]				



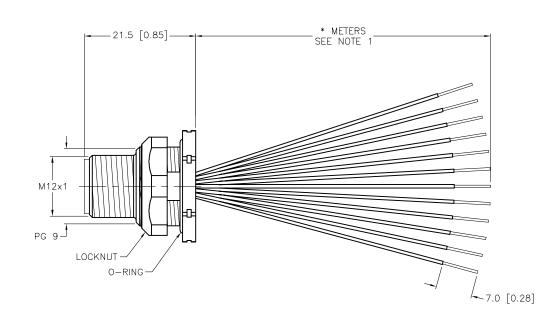

CABLE LENGTH	TOLERANCE*					
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER					
STRIP LENGTH	TOLERANCE *					
0-7mm	±0.5mm					
8-29mm	±1.0mm					
30-49mm	±2.0mm					
50-69mm	±3.0mm					
70-100mm	±4.0mm					
OVER 100mm	±5.0mm					
* UNLESS OTHERWISE SPECIFIED						

## NOTES:

1. "\*" INDICATES LEAD LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

					FI
С	UPDATE VOLTAGE RATING	СВМ	02/21/23	78300	ĺ
REV	DESCRIPTION	BY	DATE	ECO NO.	ĺ

## SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS  1. 2. 3. 4.	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		rck	3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us
MATERIAL		DRFT RDS	DATE 12/04/02	DESCRIPTION	
SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS	APVD	SCALE 1=.8	FSFD	12-*
	DRAWING ARE FOR REFERENCE ONLY	UNIT OF ME	ASUREMENT	IDENTIFICATION NO.	I REV
FINISH	CONTACT TURCK	MILLIMETE	ER [ INCH ]	IDENTIFICATION NO.	
SEE SPECIFICATIONS	FOR MORE INFORMATION				
		DO NOT SCALE	THIS DRAWING	FILE: 777001603	SHEET 1 OF 1