
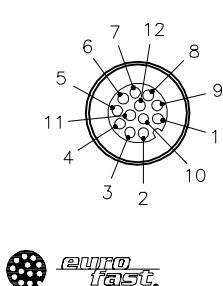
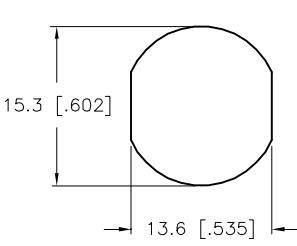
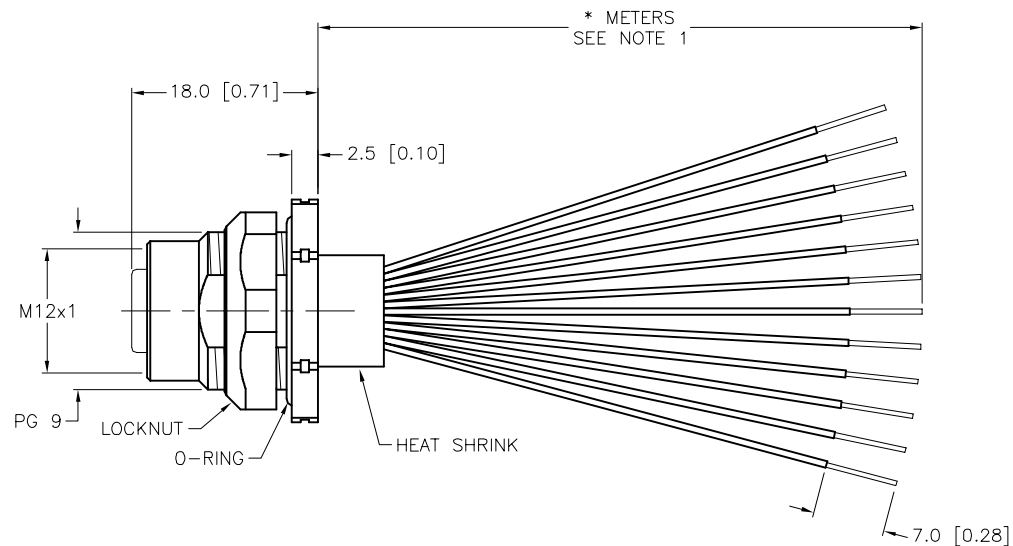


FEMALE END VIEW		TYPICAL PANEL CUTOUT	SPECIFICATIONS	
<div></div>		<div></div>	CONTACT CARRIER MATERIAL/COLOR	NYLON OR TPU/BLACK
			CONTACT MATERIAL/PLATING	BRASS/GOLD
			O-RING MATERIAL	NITRILE
			RATED CURRENT [A]	2.0 A
			RATED VOLTAGE [V]	30 V
			HOUSING, LOCKNUT MATERIAL/PLATING	BRASS/NICKEL
			NUMBER OF CONDUCTORS [AWG]	12x24 AWG
			TEMPERATURE RATING	-40°C to +105°C (-40°F to +221°F)
			PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP68
			MAX. PANEL THICKNESS	3.0 [0.12]

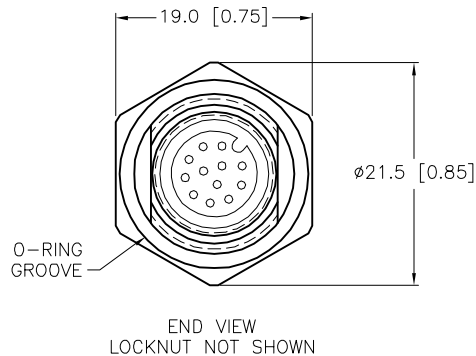


CABLE LENGTH	TOLERANCE *
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE *
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

NOTES:

1. "*" INDICATES LEAD LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
1. 2. 3. 4.				DRFT RDS		DATE 12/04/02	
MATERIAL		SEE SPECIFICATIONS		APVD		SCALE 1=.8	
FINISH		SEE SPECIFICATIONS		UNIT OF MEASUREMENT		DESCRIPTION	
				MILLIMETER [INCH]		FKFD 12-*	
				DO NOT SCALE THIS DRAWING		IDENTIFICATION NO.	
						REV	
						E	
						FILE: 777001604	
						SHEET 1 OF 1	

E	UPDATE VOLTAGE RATING	CBM	02/21/23	78300
REV	DESCRIPTION	BY	DATE	ECO NO.