


| SPECIFICATIONS | |
|--------------------------------|----------------------------------|
| CONTACT CARRIER MATERIAL/COLOR | NYLON OR TPU |
| MOLDED HEAD MATERIAL/COLOR | TPU/YELLOW |
| CONTACT MATERIAL/PLATING | BRASS/GOLD |
| COUPLING NUT MATERIAL/PLATING | BRASS/NICKEL |
| RATED CURRENT [A] | 4.0 A |
| RATED VOLTAGE [V] | 250 VAC/300 VDC |
| CABLE JACKET/COLOR | CPE/YELLOW |
| CONDUCTOR INSULATION MATERIAL | EPDM |
| CONDUCTORS [AWG] | 4x18 AWG |
| TEMPERATURE RATING | -50°C to +105°C (-58°F to 221°F) |
| PROTECTION CLASS | MEETS NEMA 1,3,4,6P AND IEC IP68 |

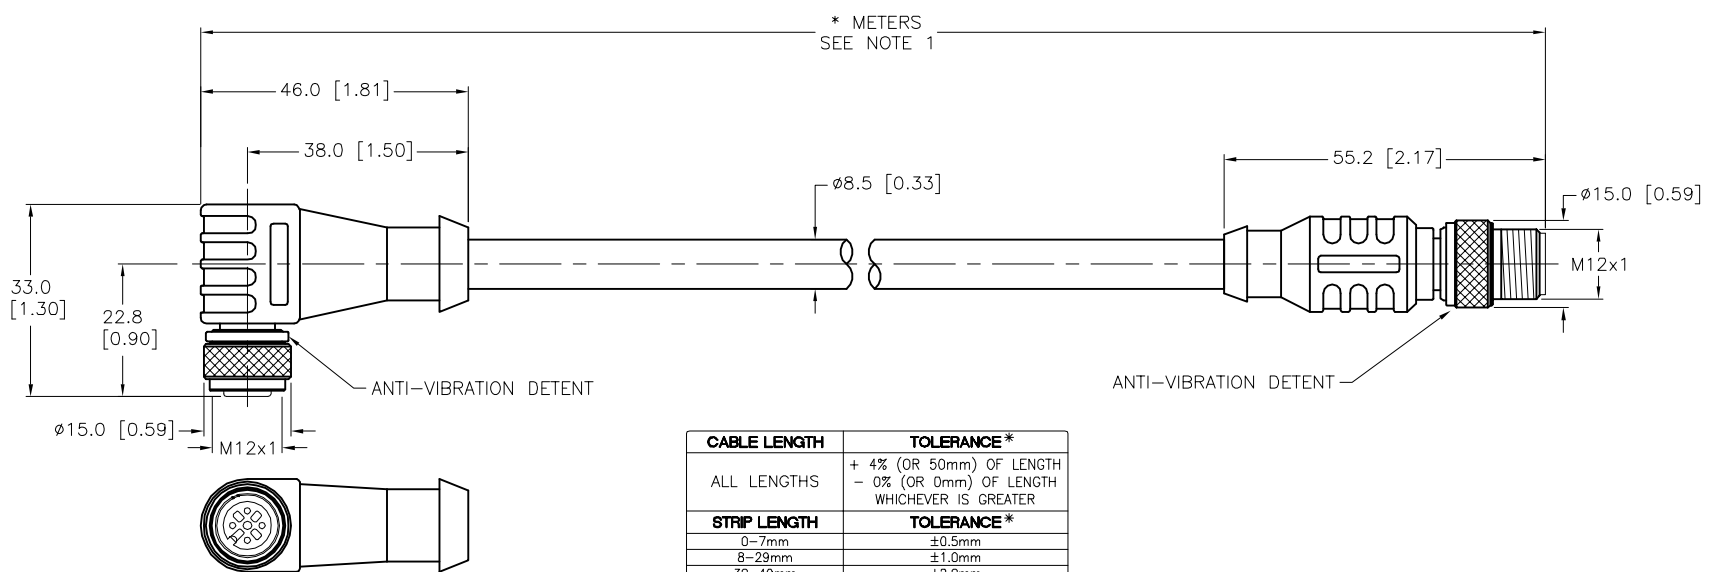

| CABLE LENGTH | TOLERANCE* |
|--------------|---|
| ALL LENGTHS | + 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER |
| STRIP LENGTH | TOLERANCE* |
| 0-7mm | ±0.5mm |
| 8-29mm | ±1.0mm |
| 30-49mm | ±2.0mm |
| 50-69mm | ±3.0mm |
| 70-100mm | ±4.0mm |
| OVER 100mm | ±5.0mm |

* UNLESS OTHERWISE SPECIFIED

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:
1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
2. "/S600" DESIGNATES HEAVY DUTY RUBBER JACKET AND CONDUCTORS.

| | | | | | |
|---|---|--|------------------------------|--|-----------------|
| RELATED DOCUMENTS 1. 2. 3. 4. | 3RD ANGLE PROJECTION | THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED. | | 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us | |
| | MATERIAL | DRFT RDS APVD | DATE 07/14/06 SCALE 1=1.3 | DESCRIPTION WKE 4.4T-*--RSE 4.4T/S600 | |
| FINISH | ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY CONTACT TURCK FOR MORE INFORMATION | UNIT OF MEASUREMENT MILLIMETER [INCH] | | IDENTIFICATION NO. | REV D |
| D DRAWING PROCESSED AS PART OF ECO 33971 | CBM 04/06/11 | 33971 | DO NOT SCALE THIS DRAWING | | FILE: 777001620 |
| REV DESCRIPTION | BY DATE | ECO NO. | SHEET 1 OF 1 | | |