




FEMALE END VIEW	MALE END VIEW	SPECIFICATIONS	
 <p>1 = BROWN 2 = WHITE 3 = BLUE 4 = BLACK</p>	 <p>1 = BROWN 2 = WHITE 3 = BLUE 4 = BLACK</p>	CONTACT CARRIER MATERIAL	TPU
		MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW
		CONTACT MATERIAL/PLATING	BRASS/GOLD
		COUPLING NUT MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED
		RATED CURRENT [A]	4.0 A
		RATED VOLTAGE [V]	250 V
		OUTER CABLE JACKET MATERIAL/COLOR	TPU/YELLOW
		CONDUCTOR INSULATION MATERIAL	PVC
		NUMBER OF CONDUCTORS [AWG]	4x18 AWG
		TEMPERATURE RANGE	-40°C to +90°C (-40°F to +194°F)
		PROTECTION CLASS	NEMA 1,3,4,6P AND IEC IP68, IP69K

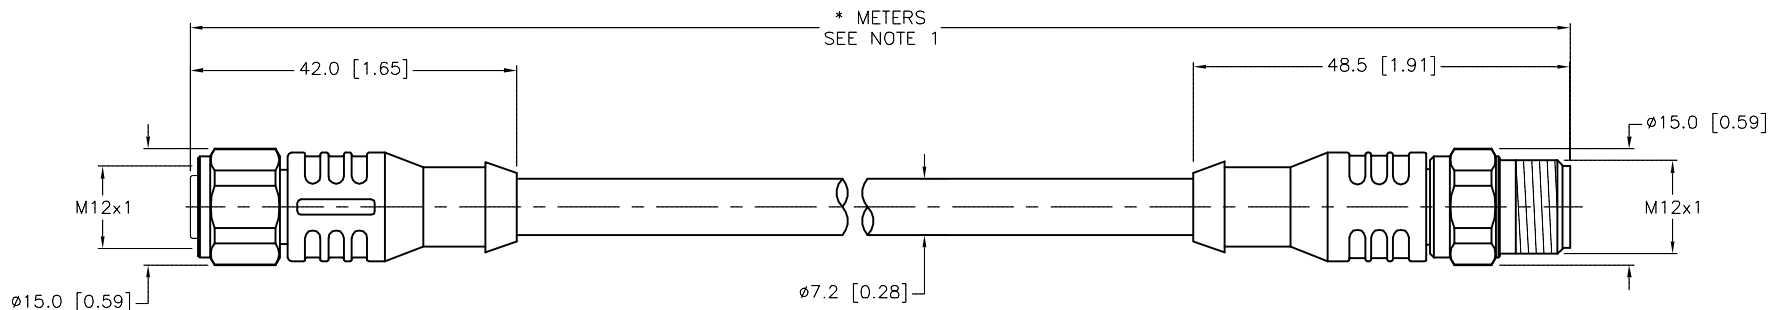


CABLE LENGTH	TOLERANCE *
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE *
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

#### NOTES:

- "\*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
- "/S90" DESIGNATES THERMOPLASTIC POLYURETHANE (TPU) CABLE JACKET.

#### SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS  1.  2.  3.  4.	3RD ANGLE PROJECTION			THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	<div><b>TURCK INC</b></div> <div><i>High Technology Sensors and Automation Controls</i></div> <div>3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com</div>		
MATERIAL	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	DRFT	RWC	DATE	05/29/07	DESCRIPTION  RKCV 4.4T-*--RSCV 4.4T/S90	
SEE SPECIFICATIONS		DSGN		SCALE	1=1.0		
FINISH		CONTACT TURCK FOR MORE INFORMATION	UNIT OF MEASUREMENT			IDENTIFICATION NO.	REV  F
SEE SPECIFICATIONS			MILLIMETER [ INCH ]				
		DO NOT SCALE THIS DRAWING			FILE: 777001688	SHEET 1 OF 1	

F	DRAWING PROCESSED AS PART OF ECO 33971	CBM	04/06/11	33971
REV	DESCRIPTION	BY	DATE	ECO NO.