



SPECIFICATIONS				
CONTACT CARRIER MATERIAL	NYLON OR TPU			
CONTACT MATERIAL/PLATING	BRASS/GOLD			
RATED CURRENT [A]	2.0 A			
RATED VOLTAGE [V]	60 VAC/75VDC			
HOUSING, LOCKNUT MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED			
NUMBER OF CONDUCTORS [AWG]	8x24 AWG			
TEMPERATURE RATING	-40°C to +105°C (-40°F to +221°F)			
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP68			
MAX. PANEL THICKNESS	3.0 [0.12]			



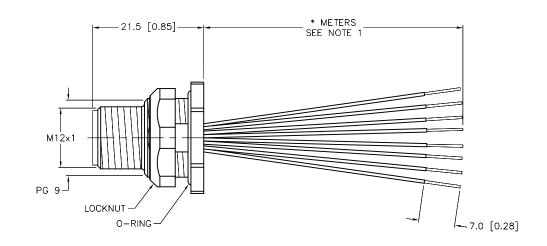

CABLE LENGTH	TOLERANCE *				
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER				
STRIP LENGTH	H TOLERANCE *				
0-7mm	±0.5mm				
8-29mm	±1.0mm				
30-49mm	±2.0mm				
50-69mm	±3.0mm				
70-100mm	±4.0mm				
OVER 100mm	±5.0mm				
* UNLESS OTHERWISE SPECIFIED					

## NOTES:

1. "\*" INDICATES CABLE LEAD IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

E	UPDATE RECEPTACLE END VIEW	RDS	02/09/15	48925
REV	DESCRIPTION	BY	DATE	ECO NO.

## SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS  1. 2. 3. 4.	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		RCK Inc	3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com	
MATERIAL		DRFT RDS	DATE 11/10/04	DESCRIPTION		
SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS	APVD	SCALE 1=.8	FSFDV	8-*	
	DRAWING ARE FOR REFERENCE ONLY	UNIT OF MEASUREMENT		IDENTIFICATION NO.		REV
FINISH	CONTACT TURCK	MILLIMETER [ INCH ]				F
SEE SPECIFICATIONS	FOR MORE INFORMATION					L
		DO NOT SCALE	THIS DRAWING	FILE: 777001850	SHEET	1 OF 1