



SPECIFICATIONS					
CONTACT CARRIER MATERIAL	NYLON OR TPU				
MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW				
CONTACT MATERIAL/PLATING	BRASS/GOLD				
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL				
RATED CURRENT [A]	4.0 A				
RATED VOLTAGE [V]	250 V				
OUTER JACKET MATERIAL/COLOR	PVC/GREY				
CONDUCTOR INSULATION MATERIAL	PVC				
NUMBER OF CONDUCTOR [AWG]	4×22 AWG				
TEMPERATURE RATING	-40°C to +105°C (-40°F to +221°F)				
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67				

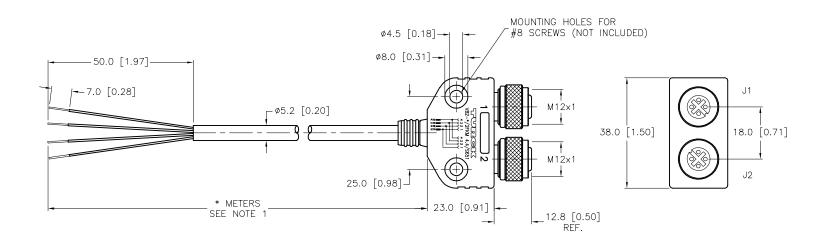

CABLE LENGTH	TOLERANCE *			
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER			
STRIP LENGTH	TOLERANCE *			
0-7mm	±0.5mm			
8-29mm	±1.0mm			
30-49mm	±2.0mm			
50-69mm	±3.0mm			
70-100mm	±4.0mm			
OVER 100mm	±5.0mm			
* UNLESS OTHERWISE SPECIFIED				



3RD ANGLE PROJECTION

## SOURCE DRAWING - FOR REFERENCE ONLY

SPECIFIC S		4.
		MAT
	SPECIFIC	Š

2.

3.

RELATED DOCUMENTS

SEE SPECIFICATIONS

ERIAL ALL DIMENSIONS SEE SPECIFICATIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY FINISH CONTACT TURCK FOR MORE INFORMATION

## DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED. JBJ

THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS

DATE 03/11/03 DESCRIPTION SCALE 1 = 1.3

## UNIT OF MEASUREMENT

DO NOT SCALE THIS DRAWING

VB2-\*/2FKM 4.4/S651

3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769

(763) 553-7300

(763) 553-0708 fax www.turck.us

MILLIMETER [ INCH ]

_				
	IDENTIFICATION NO.			REV
				А
	FILE: 777001910	SHEET	1	OF 1

## NOTES:

- 1. "\*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER LENGTHS.
- 2 "/S651" INDICATES PARALLEL WIRING

	2. / 3001 INDICATES PARALLEL WINNIO.			
Α	DRAWING RELEASE	JBJ	03/11/03	
REV	DESCRIPTION	BY	DATE	ECO NO.