


# BI7-Q08-AP6X2-0.7-PSG3M

## Inductive Sensor – With Increased Switching Distance

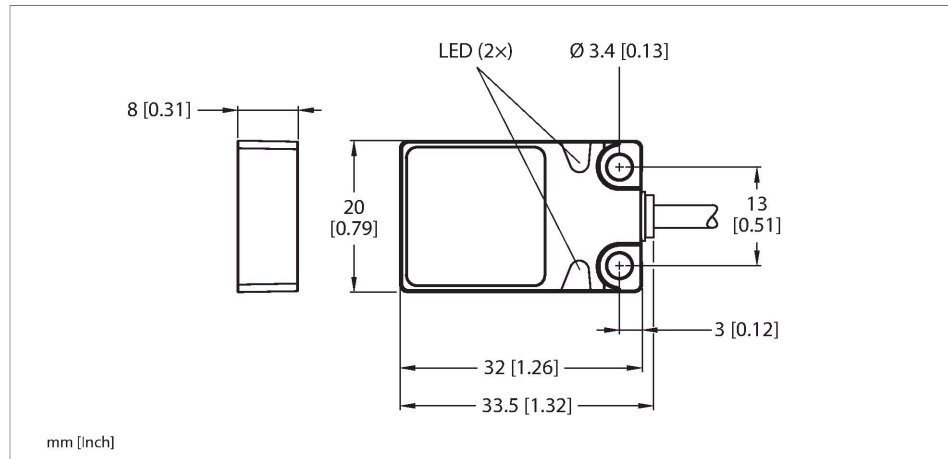


### Technical data

Type	BI7-Q08-AP6X2-0.7-PSG3M
ID	1601693
<b>General data</b>	
Rated switching distance	7 mm
Mounting conditions	Flush
Secured operating distance	$\leq (0.81 \times S_n)$ mm
Correction factors	St37 = 1; Al = 0.3; stainless steel = 0.7; Ms = 0.4
Repeat accuracy	$\leq 2 \%$ of full scale
Temperature drift	$\leq \pm 10 \%$
Hysteresis	3...15 %
<b>Electrical data</b>	
Operating voltage $U_B$	10...30 VDC
Ripple $U_{rs}$	$\leq 10 \%$ $U_{Bmax}$
DC rated operating current $I_o$	$\leq 200$ mA
No-load current	$\leq 15$ mA
Residual current	$\leq 0.1$ mA
Isolation test voltage	0.5 kV
Short-circuit protection	yes/Cyclic
Voltage drop at $I_o$	$\leq 1.8$ V
Wire break/reverse polarity protection	yes/Complete
Output function	3-wire, NO contact, PNP
Switching frequency	0.5 kHz

### Features

- Rectangular, height 8 mm
- Active face on top
- Metal, Zamak, nickel-plated
- Large sensing range
- DC 3-wire, 10...30 VDC
- NO contact, PNP output
- Pigtail with male end M8 x 1

### Wiring diagram

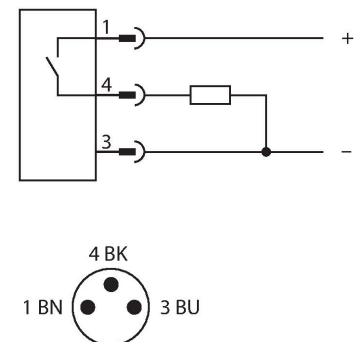

### Functional principle

Inductive sensors detect metal objects contactless and wear-free. For this, they use a high-frequency electromagnetic AC field that interacts with the target. Inductive sensors generate this field via an RLC circuit with a ferrite coil.

Technical data

Mechanical data	
Design	Rectangular, Q08
Dimensions	32 x 20 x 8 mm
Housing material	Metal, Zamak, Nickel Plated
Active area material	Plastic, PP, yellow
Electrical connection	Cable with connector, M8 × 1
Cable quality	Ø 3 mm, Gray, Lif9Y-11Y, PUR, 0.7 m
	Suited for E-ChainSystems® acc. to manufacturers declaration H1063M
Core cross-section	3 x 0.14 mm <sup>2</sup>
Environmental conditions	
Ambient temperature	-25...+70 °C
Vibration resistance	55 Hz (1 mm)
Shock resistance	30 g (11 ms)
Protection class	IP68
MTTF	2283 years acc. to SN 29500 (Ed. 99) 40 °C
Power-on indication	LED, Green
Switching state	LED, Yellow

Mounting instructions

### Mounting instructions/Description



The image contains two technical diagrams. The main diagram on the left shows two yellow Q08 sensors mounted on a grey rail. Dimension lines indicate: 'B' for the width of the sensor, 'D' for the distance between the centers of the two sensors, 'S' for the distance from the sensor to the end of the rail, and 'W' for the total width of the rail assembly. A secondary diagram on the right shows a single yellow sensor and its footprint on a surface, with dimension 'G' indicating the distance from the sensor to the edge of the footprint.

Distance D	40 mm
------------	-------

Distance W	24 mm
------------	-------

Distance S	1 × B
------------	-------

Distance G	48 mm
------------	-------

Width active area B	20 mm
---------------------	-------

BI7-Q08-AP6X2-0...7-PSG3M| 02/21/2025 14:30 | technical changes reserved