


# BI7-Q08-AP6X2-2-PSG3M Inductive Sensor – With Increased Switching Distance



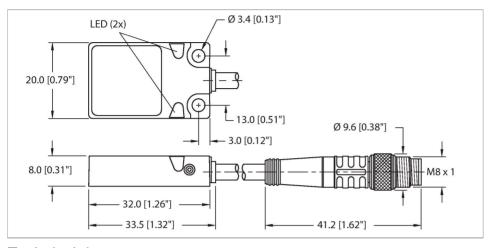


#### Technical data

| Type                                      | BI7-Q08-AP6X2-2-PSG3M                               |
|---|---|
| ID  | 1601694   |
| General data                              |   |
| Rated switching distance                  | 7 mm  |
| Mounting conditions                       | Flush   |
| Secured operating distance                | ≤ (0.81 × Sn) mm                                    |
| Correction factors                        | St37 = 1; Al = 0.3; stainless steel = 0.7; Ms = 0.4 |
| Repeat accuracy                           | ≤ 2 % of full scale                                 |
| Hysteresis                                | 315 %   |
| Electrical data                           |   |
| Operating voltage U <sub>B</sub>          | 1030 VDC  |
| Ripple U <sub>ss</sub>                    | ≤ 10 % U <sub>Bmax</sub>                            |
| DC rated operating current I <sub>o</sub> | ≤ 200 mA  |
| No-load current                           | ≤ 15 mA   |
| Residual current                          | ≤ 0.1 mA  |
| Isolation test voltage                    | 0.5 kV  |
| Short-circuit protection                  | yes/Cyclic  |
| Voltage drop at I <sub>e</sub>            | ≤ 1.8 V   |
| Wire break/reverse polarity protection    | yes/Complete  |
| Output function                           | 3-wire, NO contact, PNP                             |
| Switching frequency                       | 0.5 kHz   |
| Mechanical data                           |   |
| Design                                    | Rectangular, Q08                                    |

#### **Features**

- Rectangular, height 8 mm
- ■Active face on top
- Metal, Zamak, nickel-plated
- Large sensing range
- ■DC 3-wire, 10...30 VDC
- ■NO contact, PNP output
- Pigtail with male end M8 x 1

#### Wiring diagram





### Functional principle

Inductive sensors detect metal objects contactless and wear-free. For this, they use a high-frequency electromagnetic AC field that interacts with the target. Inductive sensors generate this field via an RLC circuit with a ferrite coil.





### Technical data

| 32 x 20 x 8 mm  |
|---|
| Metal, Zamak, Nickel Plated   |
| Plastic, PP, yellow   |
| Cable with connector, M8 × 1  |
| Ø 3 mm, Gray, Lif9Y-11Y, PUR, 2 m                                   |
| Suited for E-ChainSystems® acc. to manufacturers declaration H1063M |
| 3 x 0.14 mm²  |
|   |
| -25+70 °C   |
| 55 Hz (1 mm)  |
| 30 g (11 ms)  |
| IP68  |
| 2283 years acc. to SN 29500 (Ed. 99) 40 °C                          |
|   |
| LED, Green  |
|   |

## Mounting instructions

#### Mounting instructions/Description





| Distance D          | 40 mm |
|---------------------|-------|
| Distance W          | 24 mm |
| Distance S          | 1 × B |
| Distance G          | 48 mm |
| Width active area B | 20 mm |

2|2