


MALE END VIEW



A = BLUE

B = GREY/PINK

C = RED/BLUE

D = WHITE/GREEN

E = BLACK

F = BROWN/GREEN

G = PINK

H = WHITE/YELLOW

I = GREEN

K = YELLOW/BROWN

L = BROWN

M = ORANGE

N = GREY/BROWN

O = VIOLET

P = WHITE


R = RED

S = GREY

T = YELLOW

U = TAN

FEMALE END VIEW



A = BLUE

B = GREY/PINK

C = RED/BLUE

D = WHITE/GREEN

E = BLACK

F = BROWN/GREEN

G = PINK

H = WHITE/YELLOW

I = GREEN

K = YELLOW/BROWN

L = BROWN

M = ORANGE

N = GREY/BROWN

O = VIOLET

P = WHITE

R = RED


S = GREY

T = YELLOW

U = TAN

SPECIFICATIONS

CONTACT CARRIER MATERIAL/COLOR	TPU/BLACK
MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW
CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
RATED CURRENT [A]	3.0 A
RATED VOLTAGE [V]	30 VAC/VDC
OUTER JACKET MATERIAL/COLOR	PVC/BLACK
CONDUCTOR INSULATION MATERIAL	PVC
NUMBER OF CONDUCTORS [AWG]	19x22 AWG
DRAIN/SHIELD	24 AWG DRAIN/POLYESTER FOIL SHIELD
TEMPERATURE RANGE	-40°C TO +105°C (-40°F TO +221°F)
PROTECTION CLASS	MEETS IEC IP67

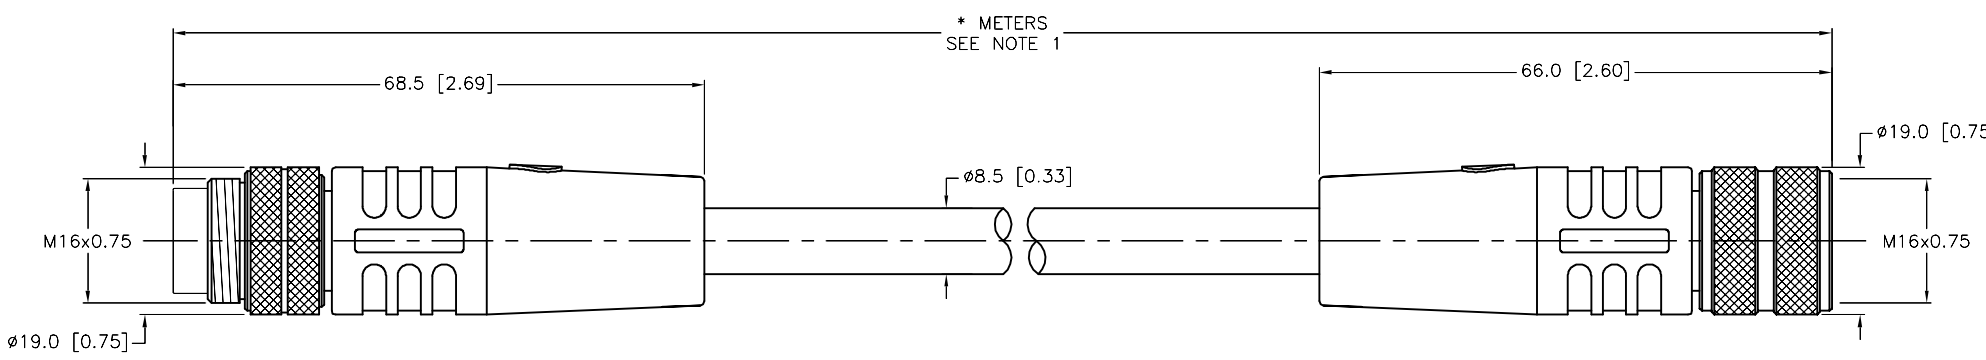

\* METERS

SEE NOTE 1

CABLE LENGTH	TOLERANCE *
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE *
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm

\* UNLESS OTHERWISE SPECIFIED

NOTES:

1. "\*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

RELATED DOCUMENTS


1.

2.

3.

4.

3RD ANGLE PROJECTION



ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY

MATERIAL

SEE SPECIFICATIONS

FINISH

SEE SPECIFICATIONS

CONTACT TURCK FOR MORE INFORMATION

THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.

DRFT JBJ

DATE 06/09/03

APVD

SCALE 1=1.0

UNIT OF MEASUREMENT

MILLIMETER [ INCH ]

DO NOT SCALE THIS DRAWING

TURCK INC

High Technology Sensors and Automation Controls

3000 CAMPUS DRIVE  
MINNEAPOLIS, MN 55441  
1-800-544-7769  
(763) 553-7300  
(763) 553-0708 fax  
turck.com

DESCRIPTION

BSM BKM 19-995-\*

IDENTIFICATION NO.

REV

H

FILE: 777002086

SHEET 1 OF 1