



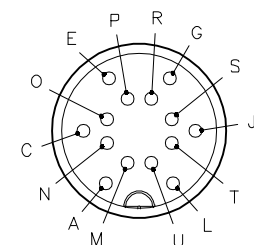


MALE END VIEW		FEMALE END VIEW	SPECIFICATIONS	
			MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW
<p>A = BROWN C = RED/BLUE E = BLACK G = PINK J = GREEN L = BLUE M = ORANGE N = GREY/BROWN O = VIOLET P = WHITE R = RED S = GREY T = YELLOW U = TAN</p>			CONTACT CARRIER MATERIAL/COLOR	TPU/BLACK
 M16 connector		 M16 connector	CONTACT MATERIAL/PLATING	BRASS/GOLD
			COUPLING NUT MATERIAL	BRASS/NICKEL
			RATED CURRENT [A]	3.0 A
			RATED VOLTAGE [V]	30 VAC/VDC
			OUTER JACKET MATERIAL/COLOR	PVC/BLACK
			CONDUCTOR INSULATION MATERIAL	PVC
			NUMBER OF CONDUCTORS [AWG]	14x22 AWG
			DRAIN/SHIELD	24 AWG/ALUMINUM-POLYESTER FOIL
			TEMPERATURE RANGE	-40°C TO +105°C (-40°F TO +221°F)
			PROTECTION CLASS	MEETS IEC IP67

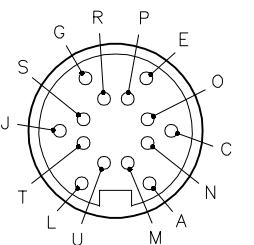


CABLE LENGTH	TOLERANCE *
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE *
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

NOTES:

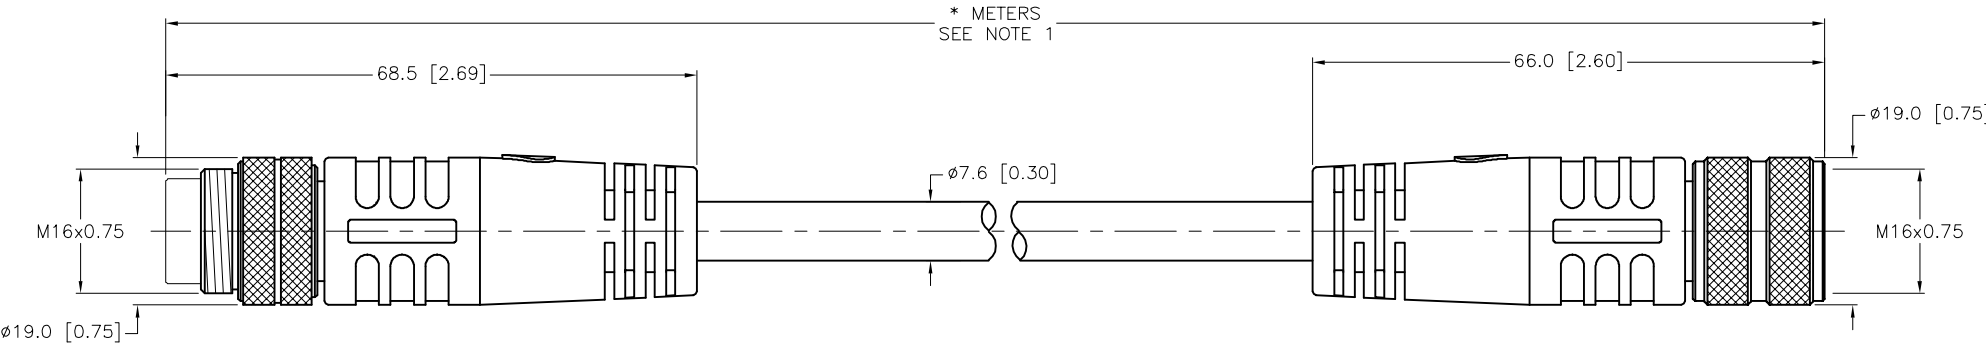1. "\*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

G	DRAWING PROCESSED AS PART OF ECO 33971	CBM	04/06/11	33971
REV	DESCRIPTION	BY	DATE	ECO NO.

RELATED DOCUMENTS  1.  2.  3.  4.	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		<div>TURCK</div> <div>3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us</div>			
							
	MATERIAL	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	DRFT	JB	DATE	06/09/03	DESCRIPTION  BSM BKM 14-998-*
	SEE SPECIFICATIONS		APVD		SCALE	1 = 1.0	
FINISH	CONTACT TURCK FOR MORE INFORMATION	UNIT OF MEASUREMENT			IDENTIFICATION NO.		REV
SEE SPECIFICATIONS		MILLIMETER [ INCH ]					G
		DO NOT SCALE THIS DRAWING			FILE: 777002089		SHEET 1 OF 1