
	END MEM
MALE I	END VIEW
9 4 3 8 5 6 7 1 (LONG)	1 = ORANGE 2 = BLUE 3 = RED/BLACK 4 = GREEN/BLACK 5 = WHITE 6 = RED 7 = GREEN/YELLOW 8 = WHITE/BLACK 9 = BLACK
mini iast.	

SPECIFICATIONS				
CONTACT CARRIER MATERIAL	TPU			
MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW			
CONTACT MATERIAL/PLATING	BRASS/GOLD			
COUPLING NUT MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED			
RATED CURRENT [A]	7.0 A			
RATED VOLTAGE [V]	600 V			
OUTER JACKET MATERIAL/COLOR	PVC/YELLOW			
CONDUCTOR INSULATION MATERIAL	PVC			
NUMBER OF CONDUCTORS	9x16 AWG			
TEMPERATURE RATING	-40°C to +105°C (-40°F to +221°F)			
PROTECTION CLASS	NEMA 1,3,4,4X,6P,12 & IECIP67,IP68,IP69,IP69K			

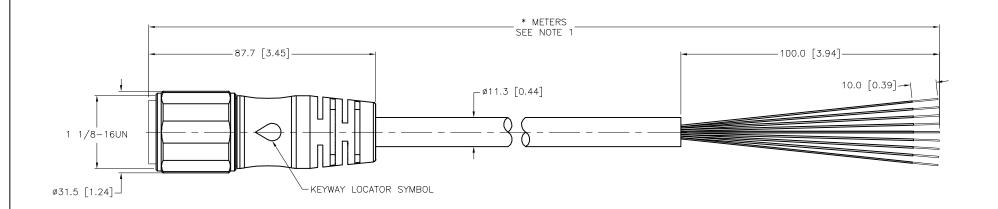

CABLE LENGTH	TOLERANCE *			
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER			
STRIP LENGTH	TOLERANCE *			
0-7mm	±0.5mm			
8-29mm	±1.0mm			
30-49mm	±2.0mm			
50-69mm	±3.0mm			
70-100mm	±4.0mm			
OVER 100mm	±5.0mm			
* UNLESS OTHERWISE SPECIFIED				

NOTEC.

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

G	UPDATE PROTECTION CLASS	СВМ	04/13/21	76628
REV	DESCRIPTION	BY	DATE	ECO NO.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		RCK	3000 CAMPUS MINNEAPOLIS, MM 1-800-544- (763) 553-7 (763) 553-0 www.turck.i	N 55441 7769 7300 1708 fax
MATERIAL		DRFT RWC	DATE 09/03/08	DESCRIPTION	00 *14	
SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS	APVD	SCALE 1=1.5	KIV	96-*M	
	DRAWING ARE FOR REFERENCE ONLY	UNIT OF ME	ASUREMENT	IDENTIFICATION NO.		REV
FINISH		MILLIMETE		IDENTIFICATION NO.		KEV
SEE SPECIFICATIONS	CONTACT TURCK FOR MORE INFORMATION	MILLIME				G
		DO NOT SCALE	THIS DRAWING	FILE: 777002310	SHEET	1 OF 1