


BI2-Q10S-AP6X-0.3-RS4T Inductive Sensor

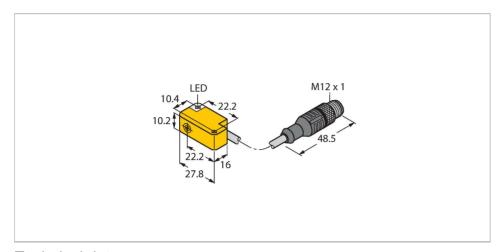


Technical data

Type	BI2-Q10S-AP6X-0.3-RS4T
ID	1609370
General data	
Rated switching distance	2 mm
Mounting conditions	Flush
Secured operating distance	≤ (0.81 × Sn) mm
Correction factors	St37 = 1; Al = 0.3; stainless steel = 0.7; Ms = 0.4
Repeat accuracy	≤ 2 % of full scale
Hysteresis	315 %
Electrical data	
Operating voltage U _B	1030 VDC
Ripple U _{ss}	≤ 10 % U _{Bmax}
DC rated operating current I _e	≤ 150 mA
No-load current	≤ 15 mA
Residual current	≤ 0.1 mA
Isolation test voltage	0.5 kV
Short-circuit protection	yes/Cyclic
Voltage drop at I _e	≤ 1.8 V
Wire break/reverse polarity protection	yes/Complete
Output function	3-wire, NO contact, PNP
Switching frequency	2 kHz
Mechanical data	
Design	Rectangular, Q10S

Features

- Rectangular, height 10.2 mm
- Active face, lateral
- Cable outlet to all sides
- ■Plastic, PP-GF20
- ■DC 3-wire, 10...30 VDC
- ■NO contact, PNP output
- Pigtail with male end M12 x 1


Wiring diagram





Functional principle

Inductive sensors detect metal objects contactless and wear-free. For this, they use a high-frequency electromagnetic AC field that interacts with the target. Inductive sensors generate this field via an RLC circuit with a ferrite coil.







Technical data

27.8 x 16 x 10.2 mm
Plastic, PP-GF20
PP-GF20
metal, CuZn, nickel-plated
Cable with connector, M12 × 1
Ø 3 mm, Gray, Lif9Y-11Y, PUR, 0.3 m
Suited for E-ChainSystems® acc. to manufacturers declaration H1063M
3 x 0.14 mm ²
-25+70 °C
55 Hz (1 mm)
30 g (11 ms)
55 g (· · · ···s)
IP67

Mounting instructions

Mounting instructions/Description





Distance D	3 x B
Distance W	3 x Sn
Distance S	1 x B
Distance G	6 x Sn
Width active area B	10.2 mm