


SPECIFICATIONS				
CONTACT CARRIER MATERIAL	TPU			
MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW			
CONTACT MATERIAL/PLATING	BRASS/GOLD			
COUPLING NUT MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED			
RATED CURRENT [A]	7.0 A			
RATED VOLTAGE [V]	600 V			
OUTER JACKET MATERIAL/COLOR	PVC/YELLOW			
CONDUCTOR INSULATION MATERIAL	PVC			
NUMBER OF CONDUCTORS	12x16 AWG			
TEMPERATURE RATING	-40°C to +105°C (-40°F to +221°F)			
PROTECTION CLASS	NEMA 1,3,4,4X,6P,12 & IECIP67,IP68,IP69,IP69K			

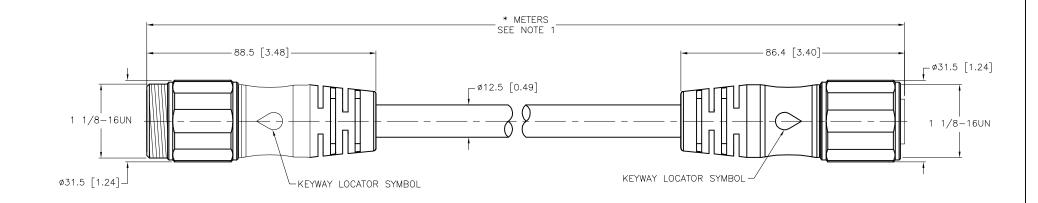

CABLE LENGTH	TOLERANCE *			
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER			
STRIP LENGTH	TOLERANCE *			
0-7mm	±0.5mm			
8-29mm	±1.0mm			
30-49mm	±2.0mm			
50-69mm	±3.0mm			
70-100mm	±4.0mm			
OVER 100mm	±5.0mm			
* UNLESS OTHERWISE SPECIFIED				

CBM 04/13/21

DATE

76628

ECO NO.

## NOTES:

REV DESCRIPTION

H UPDATE PROTECTION CLASS

1. "\*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

RELATED DOCUMENTS  1. 2. 3. 4.	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	)	rck	3000 CAMPUS MINNEAPOLIS, MN 1-800-544-7 (763) 553-7 (763) 553-0 www.turck.u	55441 7769 300 708 fax
MATERIAL		DRFT RWC	DATE 07/28/05	DESCRIPTION DCV DIXV	106 *M	
SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS	APVD	SCALE 1=1.5	RSV RKV	120-11	
DRAWING ARE FOR REFERENCE ONLY	UNIT OF MEASUREMENT		IDENTIFICATION NO		REV	
FINISH		MILLIMETE		IDENTIFICATION NO.		REV
	CONTACT TURCK FOR MORE	MILLIME				Н
SEE SPECIFICATIONS	INFORMATION					
	1	DO NOT SCALE	THIS DRAWING	FILE: 777002333	SHEET	1 OF 1

SOURCE DRAWING - FOR REFERENCE ONLY