



# BI2-Q4.7-AN6X Inductive Sensor




## Technical data

|   |   |
|---|---|
| Type                                      | BI2-Q4.7-AN6X                                       |
| ID  | 1614001   |
| <b>General data</b>                       |   |
| Rated switching distance                  | 2 mm  |
| Mounting conditions                       | Flush   |
| Secured operating distance                | $\leq (0.81 \times S_n)$ mm                         |
| Correction factors                        | St37 = 1; Al = 0.3; stainless steel = 0.7; Ms = 0.4 |
| Repeat accuracy                           | $\leq 2$ % of full scale                            |
| Temperature drift                         | $\leq \pm 10$ %                                     |
| Hysteresis                                | 3...15 %  |
| <b>Electrical data</b>                    |   |
| Operating voltage                         | 10...30 VDC   |
| Residual ripple                           | $\leq 10$ % $U_{ss}$                                |
| DC rated operational current              | $\leq 100$ mA                                       |
| No-load current                           | 15 mA   |
| Residual current                          | $\leq 0.1$ mA                                       |
| Isolation test voltage                    | $\leq 0.5$ kV                                       |
| Short-circuit protection                  | yes / Cyclic  |
| Voltage drop at $I_o$                     | $\leq 1.8$ V  |
| Wire breakage/Reverse polarity protection | yes / Complete                                      |
| Output function                           | 3-wire, NO contact, NPN                             |
| Switching frequency                       | 1 kHz   |

## Features

- Rectangular, height 4.7 mm
- Active face on top
- Metal housing, GD-ZnAl
- DC 3-wire, 10...30 VDC
- NO contact, NPN output
- Cable connection

## Wiring diagram




## Functional principle

Inductive sensors detect metal objects contactless and wear-free. For this, they use a high-frequency electromagnetic AC field that interacts with the target. Inductive sensors generate this field via an RLC circuit with a ferrite coil.

## Technical data

| Mechanical data                |  |
|--------------------------------|--|
| Design                         | Rectangular, Q4,7                          |
| Dimensions                     | 16 x 8 x 4.7 mm                            |
| Housing material               | Metal, GD-ZnAl                             |
| Active area material           | Plastic, PA12                              |
| Tightening torque fixing screw | 0.5 Nm                                     |
| Electrical connection          | Cable                                      |
| Cable quality                  | Ø 3 mm, Gray, LifY-11Y, PUR, 2 m           |
| Core cross-section             | 3 x 0.14 mm <sup>2</sup>                   |
| Environmental conditions       |  |
| Ambient temperature            | 0...+85 °C                                 |
| Vibration resistance           | 55 Hz (1 mm)                               |
| Shock resistance               | 30 g (11 ms)                               |
| Protection class               | IP67                                       |
| MTTF                           | 2283 years acc. to SN 29500 (Ed. 99) 40 °C |
| Switching state                | LED, Yellow                                |

## Mounting instructions
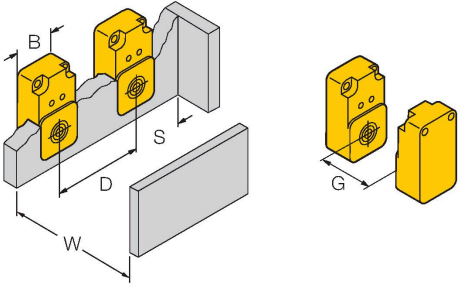
| Mounting instructions/Description   |                     |         |
|---|---------------------|---------|
|  | Distance D          | 2 x B   |
|   | Distance W          | 3 x Sn  |
|   | Distance S          | 1.5 x B |
|   | Distance G          | 6 x Sn  |
|   | Width active area B | 8 mm    |

## Accessories

|   |         |
|---|---------|
| MW-Q4.7/Q5.5  | 6945013 |
| Mounting bracket for rectangular Q4.7 or Q5.5; material VA 1.4401 |         |

