


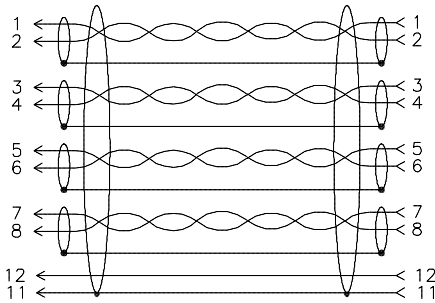
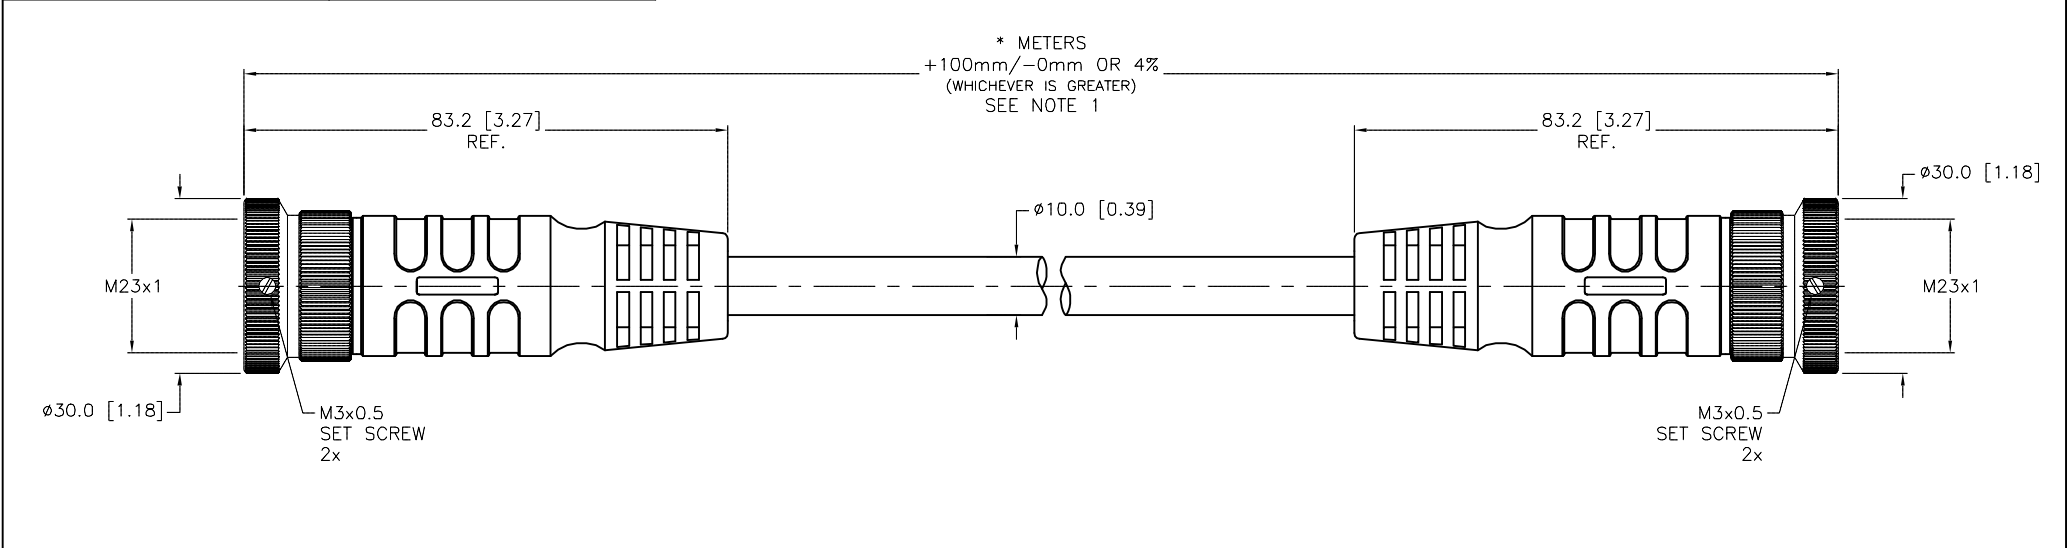


MALE END VIEW	FEMALE END VIEW	WIRING DIAGRAM	SPECIFICATIONS																													
 1 = WHITE/BLACK 2 = BLACK/WHITE 3 = WHITE/GREEN 4 = GREEN/WHITE 5 = WHITE/RED 6 = RED/WHITE 7 = WHITE/ORANGE 8 = ORANGE/WHITE 9 = N/C 10 = N/C 11 = DRAIN 12 = GREEN/YELLOW	 1 = WHITE/BLACK 2 = BLACK/WHITE 3 = WHITE/GREEN 4 = GREEN/WHITE 5 = WHITE/RED 6 = RED/WHITE 7 = WHITE/ORANGE 8 = ORANGE/WHITE 9 = N/C 10 = N/C 11 = DRAIN 12 = GREEN/YELLOW		<table><tr><td>CONTACT CARRIER MATERIAL</td><td>NYLON or PBT</td></tr><tr><td>MOLDED HEAD MATERIAL/COLOR</td><td>TPU/BLACK</td></tr><tr><td>CONTACT MATERIAL/PLATING</td><td>BRASS/GOLD</td></tr><tr><td>COUPLING NUT MATERIAL/PLATING</td><td>BRASS/NICKEL</td></tr><tr><td>RATED CURRENT [A]</td><td>3.0 A</td></tr><tr><td>RATED VOLTAGE [V]</td><td>250 V</td></tr><tr><td>OUTER JACKET MATERIAL/COLOR</td><td>PVC/PLUM</td></tr><tr><td>CONDUCTOR INSULATION MATERIAL</td><td>PVC</td></tr><tr><td>NUMBER OF CONDUCTORS [AWG]</td><td>8x22 AWG, 1x18 AWG GROUND</td></tr><tr><td>DRAIN/SHIELD</td><td>5x22 AWG DRAINS/ALUMINUM FOIL SHIELDED</td></tr><tr><td>TEMPERATURE RATING</td><td>-40°C to +105°C (-40°F to +221°F)</td></tr><tr><td>PROTECTION CLASS</td><td>MEETS IEC IP67</td></tr><tr><td>CONDUCTOR ARRANGEMENT</td><td>4 SHIELDED TWISTED PAIR W/DRAIN, 1 GND, 1 DRAIN</td></tr><tr><td>CABLE RATINGS</td><td>UL: ITC/PLTC/AWM, 105°C, 300 V CSA: CMG/AWM, 105°C, 300 V</td></tr></table>	CONTACT CARRIER MATERIAL	NYLON or PBT	MOLDED HEAD MATERIAL/COLOR	TPU/BLACK	CONTACT MATERIAL/PLATING	BRASS/GOLD	COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL	RATED CURRENT [A]	3.0 A	RATED VOLTAGE [V]	250 V	OUTER JACKET MATERIAL/COLOR	PVC/PLUM	CONDUCTOR INSULATION MATERIAL	PVC	NUMBER OF CONDUCTORS [AWG]	8x22 AWG, 1x18 AWG GROUND	DRAIN/SHIELD	5x22 AWG DRAINS/ALUMINUM FOIL SHIELDED	TEMPERATURE RATING	-40°C to +105°C (-40°F to +221°F)	PROTECTION CLASS	MEETS IEC IP67	CONDUCTOR ARRANGEMENT	4 SHIELDED TWISTED PAIR W/DRAIN, 1 GND, 1 DRAIN	CABLE RATINGS	UL: ITC/PLTC/AWM, 105°C, 300 V CSA: CMG/AWM, 105°C, 300 V	
CONTACT CARRIER MATERIAL	NYLON or PBT																															
MOLDED HEAD MATERIAL/COLOR	TPU/BLACK																															
CONTACT MATERIAL/PLATING	BRASS/GOLD																															
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL																															
RATED CURRENT [A]	3.0 A																															
RATED VOLTAGE [V]	250 V																															
OUTER JACKET MATERIAL/COLOR	PVC/PLUM																															
CONDUCTOR INSULATION MATERIAL	PVC																															
NUMBER OF CONDUCTORS [AWG]	8x22 AWG, 1x18 AWG GROUND																															
DRAIN/SHIELD	5x22 AWG DRAINS/ALUMINUM FOIL SHIELDED																															
TEMPERATURE RATING	-40°C to +105°C (-40°F to +221°F)																															
PROTECTION CLASS	MEETS IEC IP67																															
CONDUCTOR ARRANGEMENT	4 SHIELDED TWISTED PAIR W/DRAIN, 1 GND, 1 DRAIN																															
CABLE RATINGS	UL: ITC/PLTC/AWM, 105°C, 300 V CSA: CMG/AWM, 105°C, 300 V																															



SOURCE DRAWING - FOR REFERENCE ONLY

NOTES: 1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.					RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com	
					1.				TURCK INC <i>High Technology Sensors and Automation Controls</i>			
					2.							
					3.							
4.		MATERIAL		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		DRFT JBJ		DATE 08/18/03		DESCRIPTION P-CSML CKML 12-960-*		
SEE SPECIFICATIONS		FINISH		CONTACT TURCK FOR MORE INFORMATION		APVD		SCALE 1=1.3				
UNIT OF MEASUREMENT		IDENTIFICATION NO.		REV								
MILLIMETER [INCH]		E										
DO NOT SCALE THIS DRAWING		FILE: 777002507		SHEET 1 OF 1								