


ECIFICATIONS
TPU or NYLON
TPU/YELLOW
BRASS/GOLD
BRASS/NICKEL
4.0 A
250 V
TPU/GRAY
PVC
4x22 AWG
24 AWG DRAIN/ALUMINIZED SHIELD
-40°C to +90°C (-40°F to +194°F)
MEETS NEMA 1,3,4,6P AND IEC IP68

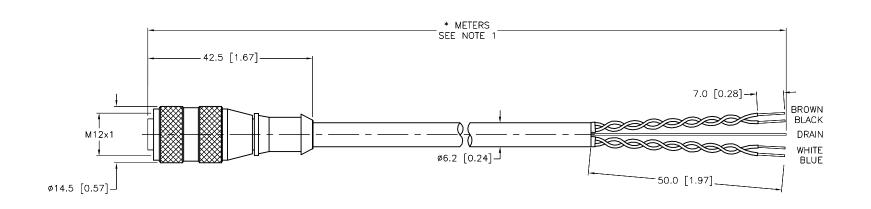

CABLE LENGTH	TOLERANCE *				
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER				
STRIP LENGTH	TOLERANCE *				
0-7mm	±0.5mm				
8-29mm	±1.0mm				
30-49mm	±2.0mm				
50-69mm	±3.0mm				
70-100mm	±4.0mm				
OVER 100mm	±5.0mm				
* UNLESS OTHERWISE SPECIFIED					

- 1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
- 2. "/S1666" DESIGNATES CABLE WITH SHIELDED, TWISTED PAIRS

F	DRAWING PROCESSED AS PART OF ECO 33971	СВМ	04/06/11	33971	
REV	DESCRIPTION	BY	DATE	ECO NO.	L

SOURCE DRAWING - FOR REFERENCE ONLY

	RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	High Technology	MINNEAPOLIS, M 1-800-544- (763) 553- (763) 553-	3000 CAMPUS DRIVE IINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com	
	MATERIAL		DRFT RDS	DATE 10/15/03	DESCRIPTION	/61666	
	SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS	DSGN	SCALE 1=1.0	RK 4.4T-*	/51666	
		DRAWING ARE FOR REFERENCE ONLY	UNIT OF ME	ASUREMENT	IDENTIFICATION NO		l REV
	FINISH		1 AN 1 1 A 40 TO	TO ENOUGH	IDENTIFICATION NO.		KEV _
		CONTACT TURCK FOR MORE	MILLIME	ER [INCH]			I F
	SEE SPECIFICATIONS	INFORMATION					'
			DO NOT SCALE	THIS DRAWING	FILE: 777002640	SHEE	T 1 OF 1
Т			•			•	