


# NI15U-MT18-AN6X-H1141/S1589 Inductive Sensor - With WeldGuard™ Coating

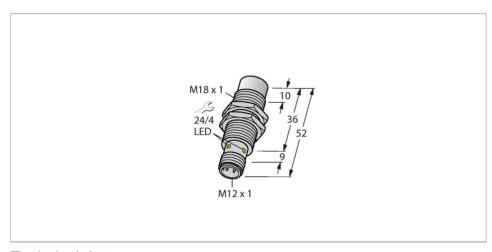


#### Technical data

Туре	NI15U-MT18-AN6X-H1141/S1589
ID	16353370
Special version	S1589 corresponds to: With weldguard coating
General data	
Rated switching distance	15 mm
Mounting conditions	Non-flush
Secured operating distance	≤ (0.81 × Sn) mm
Repeat accuracy	≤ 2 % of full scale
Temperature drift	≤ ±10 %
Hysteresis	315 %
Electrical data	
Operating voltage	1030 VDC
Residual ripple	≤ 10 % U <sub>ss</sub>
DC rated operational current	≤ 200 mA
No-load current	25 mA
Residual current	≤ 0.1 mA
Isolation test voltage	≤ 0.5 kV
Short-circuit protection	yes / Cyclic
Voltage drop at I <sub>e</sub>	≤ 1.8 V
Wire breakage/Reverse polarity protection	yes / Complete
Output function	3-wire, NO contact, NPN
DC field stability	300 mT
AC field stability	300 mT <sub>ss</sub>

#### **Features**

- ■Threaded barrel, M18 x 1
- ■Brass, PTFE-coated
- Factor 1 for all metals
- Protection class IP68
- Resistant to magnetic fields
- Large switching distance
- ■Integrated protection against predamping
- Little metal-free spaces
- ■DC 3-wire, 10...30 VDC
- ■NO contact, NPN output
- ■M12 x 1 male connector

#### Wiring diagram





## Functional principle

Inductive sensors are designed for wear-free and contactless detection of metal objects. uprox+ sensors have significant advantages due to their patented multi-coil system. They excel thanks to their optimum switching distances, maximum flexibility and operational reliability as well as efficient standardization.




#### Technical data

Insulation class	
Switching frequency	1 kHz
Mechanical data	
Design	Threaded barrel, M18 × 1
Dimensions	52 mm
Housing material	Metal, CuZn, PTFE-coated
Active area material	Plastic, LCP, PTFE-coated
Max. tightening torque of housing nut	15 Nm
Electrical connection	Connector, M12 × 1
Environmental conditions	
Ambient temperature	-30+85 °C
Vibration resistance	55 Hz (1 mm)
Shock resistance	30 g (11 ms)
Protection class	IP68
MTTF	874 years acc. to SN 29500 (Ed. 99) 40 °C
Switching state	LED, Yellow

# Mounting instructions

## Mounting instructions/Description

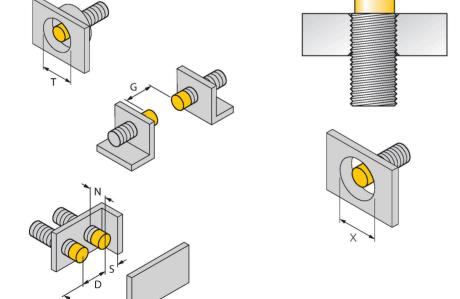

	70
Distance D	72 mm
Distance W	3 x Sn
Distance T	3 x B
Distance S	1.5 x B
Distance G	6 x Sn
Distance N	2 x Sn
Diameter active area B	Ø 18 mm
arrel sensors can be dge of the barrel. In the ne sensor operates s witching distance.	ele uprox®+ threaded screwed to the upper this mounting position, afely with a 20 % reduced aperture plate, a distance e observed.



#### Accessories

# BST-18B M5 20 28 40 24

6947214

Mounting clamp for threaded barrel sensors, with dead-stop; material: PA6




6945104

6901320

Quick-mount bracket with dead-stop; material: brass, PTFE-coated; Male thread M24 × 1.5. Note: The switching distance of the proximity switches may change when using quick-mount brackets.



6945102



Quick-mount bracket with dead-stop; material: Chrome-plated brass. Male thread M24 × 1.5. Note: The switching distance of the proximity switches may change when using quick-mount brackets.



Mounting clamp for smooth and threaded barrel sensors; material: Polypropylene