




MALE END VIEW		SPECIFICATIONS	
 1 = BLACK 2 = WHITE		CONTACT CARRIER MATERIAL	RUBBER
		CONTACT MATERIAL/PLATING	GOLD-PLATED BRASS
		COUPLING NUT MATERIAL/PLATING	ALUMINUM/ANODIZED
		RATED CURRENT [A]	18.0 A
		RATED VOLTAGE [V]	600 V
		OUTER JACKET MATERIAL/COLOR	RUBBER/BLACK
		CONDUCTOR INSULATION MATERIAL	XLPE
		NUMBER OF CONDUCTORS [AWG]	2x14 AWG
		DRAIN/SHIELD	NONE
		PROTECTION CLASS	IEC IP68
		TEMPERATURE	-40°C TO +105°C (-40°F TO +221°F)

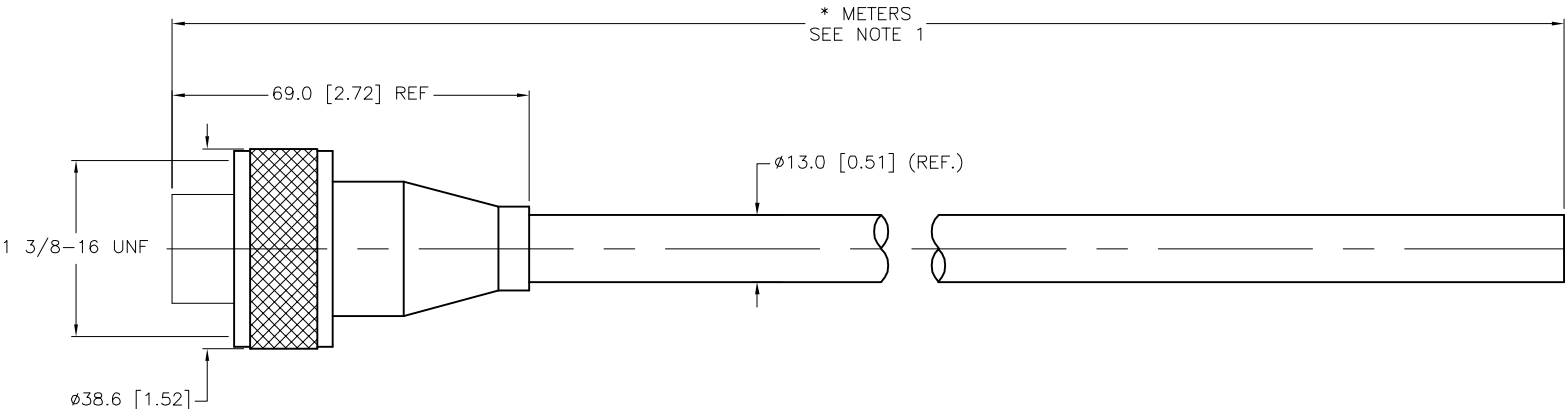

CABLE LENGTH	TOLERANCE *
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE *
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

- NOTES:
1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
2. "/S600" DESIGNATES HEAVY DUTY RUBBER INSULATION MATERIAL.

B	UPDATE CABLE DIAMETER, SEE ECO	RWC	02/05/07	17143
REV	DESCRIPTION	BY	DATE	ECO NO.

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED. TURCK 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us				
						
MATERIAL SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	DRFT	JB	DATE	11/24/03	DESCRIPTION GYM 24-*M/S600
		APVD		SCALE	1 = 1.5	
		UNIT OF MEASUREMENT MILLIMETER [INCH]				
		DO NOT SCALE THIS DRAWING				
FINISH SEE SPECIFICATIONS	CONTACT TURCK FOR MORE INFORMATION	IDENTIFICATION NO.				REV B
		FILE: 777002727				SHEET 1 OF 1