



MALE END VIEW		SPECIFICATIONS	
 1 = BLACK 2 = GREEN 3 = RED 4 = WHITE		CONTACT CARRIER MATERIAL	RUBBER
		CONTACT MATERIAL/PLATING	BRASS/GOLD
		COUPLING NUT MATERIAL/PLATING	ALUMINUM/ANODIZED
		RATED CURRENT [A]	25.0 A
		RATED VOLTAGE [V]	600 V
		OUTER JACKET MATERIAL/COLOR	RUBBER/BLACK
		CONDUCTOR INSULATION MATERIAL	XLPE
		NUMBER OF CONDUCTORS [AWG]	4x10 AWG
		PROTECTION CLASS	IEC IP68
		TEMPERATURE	-40°C TO +105°C (-40°F TO +221°F)

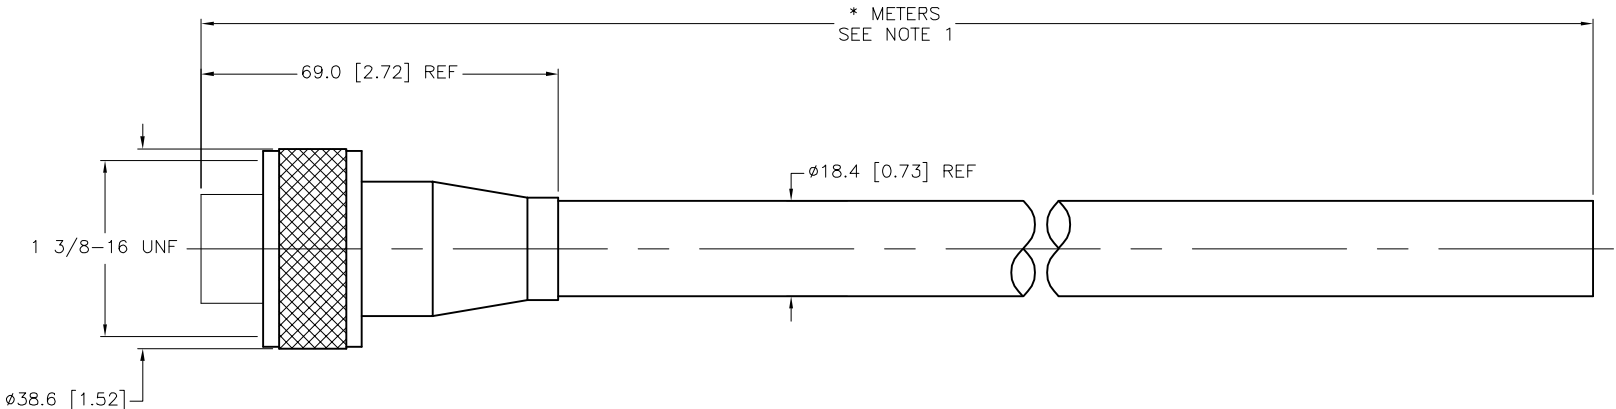


CABLE LENGTH	TOLERANCE *
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE *
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
2. "/S600" DESIGNATES HEAVY DUTY RUBBER INSULATION MATERIAL.

C	UPDATE CABLE DIAMETER, SEE ECO	RWC	02/05/07	17143
REV	DESCRIPTION	BY	DATE	ECO NO.

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		TURCK 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us		
						
MATERIAL SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	DRFT JBJ	DATE 11/24/03	DESCRIPTION GYM 40-*M/S600		
		DSGN	SCALE 1=1.5			
FINISH SEE SPECIFICATIONS	CONTACT TURCK FOR MORE INFORMATION	UNIT OF MEASUREMENT MILLIMETER [INCH] DO NOT SCALE THIS DRAWING		IDENTIFICATION NO.		REV C
				FILE: 777002731		SHEET 1 OF 1