



FEMALE END VIEW



1 = BLACK
2 = WHITE
3 = GREEN

SPECIFICATIONS

CONTACT CARRIER MATERIAL	RUBBER
CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	ALUMINUM/ANODIZED
RATED CURRENT [A]	25.0 A
RATED VOLTAGE [V]	600 V
OUTER JACKET MATERIAL/COLOR	RUBBER/BLACK
CONDUCTOR INSULATION MATERIAL	XLPE
NUMBER OF CONDUCTORS [AWG]	3x12 AWG
DRAIN/SHIELD	NONE
PROTECTION CLASS	IEC IP68
TEMPERATURE	-40°C TO +105°C (-40°F TO +221°F)

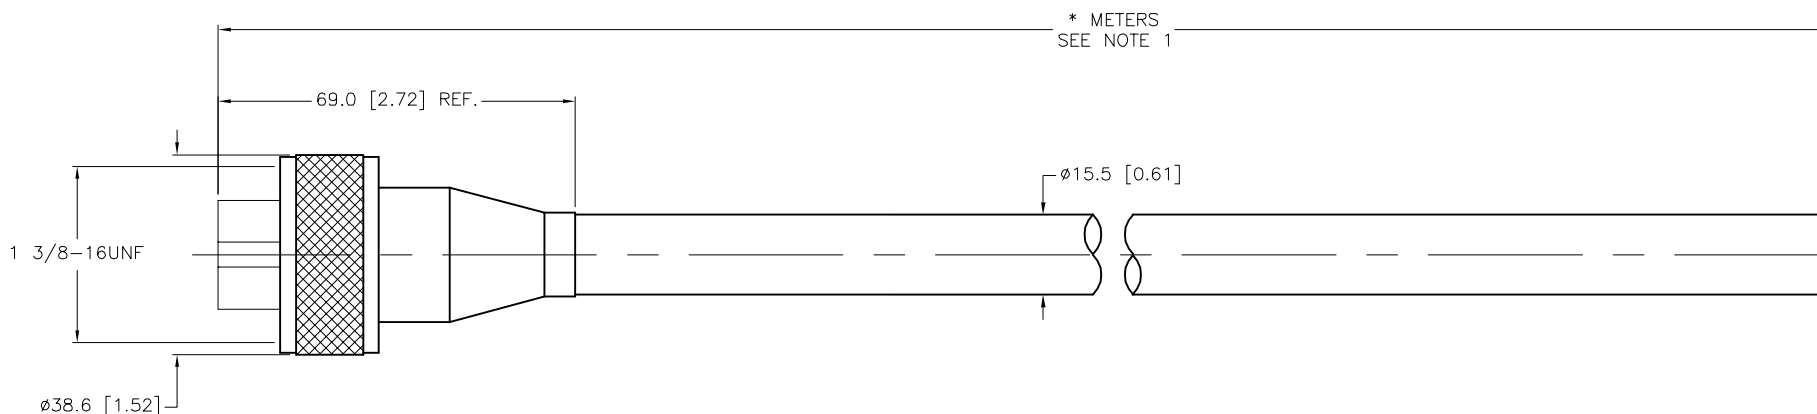


CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

2. "/S600" DESIGNATES HEAVY DUTY RUBBER INSULATION MATERIAL.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION			THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.			3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
MATERIAL SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	DRFT	JB	DATE	05/27/03	DESCRIPTION GKM 34-*M/S600		
APVD			SCALE	1=1.5				
FINISH SEE SPECIFICATIONS		CONTACT TURCK FOR MORE INFORMATION	UNIT OF MEASUREMENT MILLIMETER [INCH] DO NOT SCALE THIS DRAWING			IDENTIFICATION NO.		REV B
					FILE: 777002740		SHEET 1 OF 1	

B	UPDATE DRAWING TO U# PER ECO	TR	04/16/18	65059
REV	DESCRIPTION	BY	DATE	ECO NO.