

FEMALE END VIEW

1 = BLACK


2 = GREEN

3 = RED

4 = WHITE

SPECIFICATIONS

CONTACT CARRIER MATERIAL	RUBBER
CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	ALUMINUM/ANODIZED
RATED CURRENT [A]	25.0 A
RATED VOLTAGE [V]	600 V
OUTER JACKET MATERIAL/COLOR	RUBBER/BLACK
CONDUCTOR INSULATION MATERIAL	XLPE
NUMBER OF CONDUCTORS [AWG]	4x10 AWG
PROTECTION CLASS	IEC IP68
TEMPERATURE	-40°C TO +105°C (-40°F TO +221°F)

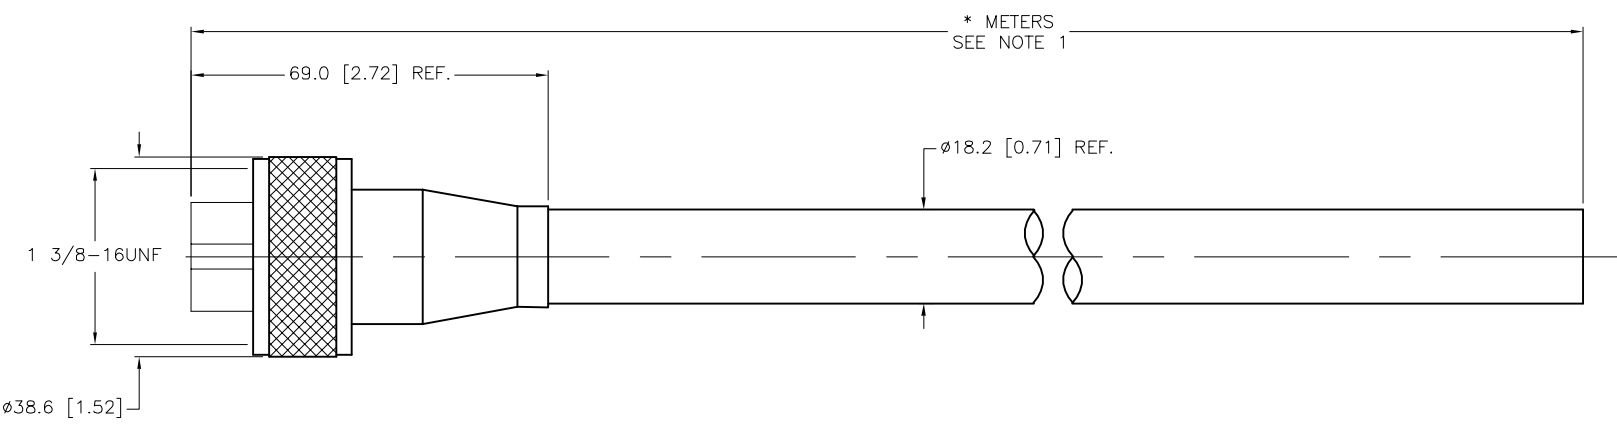

CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

2. "/S600" DESIGNATES HEAVY DUTY RUBBER INSULATION MATERIAL.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS

1.
2.
3.
4.

3RD ANGLE PROJECTION

THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.

DRFT

APVD

JB

J

DATE

06/25/03

SCALE

1=1.5

UNIT OF MEASUREMENT

MILLIMETER [INCH]

DO NOT SCALE THIS DRAWING

ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY

CONTACT TURCK FOR MORE INFORMATION

DESCRIPTION

GKM 40-*M/S600

IDENTIFICATION NO.

777002744

REV

D

3000 CAMPUS DRIVE
MINNEAPOLIS, MN 55441
1-800-544-7769
(763) 553-7300
(763) 553-0708 fax
www.turck.us

D	UPDATE TO "U" NUMBER DRAWING	RDS	04/18/18	65059
REV	DESCRIPTION	BY	DATE	ECO. NO.